mantra

Técnico

MANTRA EN EL MUNDO

MANTRA AROUND THE WORLD



David Villalba

EN_

Mantra works with a very diverse team of freelance designers, specialized in different branches of design.

They are a group of highly qualified professionals experience in the lighting sector, who contribute with original solutions in the development of new concepts; they also participate actively in the whole product development process, from the initial draft to the lasted finishing details

This wide variety of styles that our designers offer have a direct impact on our catalogues, which are made up of ideas that are adapted to any type of lighting need.

Besides, we take pride in having a great relationship with them, which goes beyond the professional link. We truly rely on their capability and work methods, which have provided, such innovative and stylish collections so far.



José Ignacio ballester

FR_

Mantra collabore avec une équipe de dessinateurs externes très diverse, spécialisés dans différentes branches dans le monde du design.

Des professionnels avec une grande expérience dans le secteur de l'illumination, qui apportent des solutions innovatrices au développement de nouveaux concepts, et participent dans tous les processus de fabrication du produit, depuis le brouillon jusqu'à la conception du produit final.

Cette grande variété de styles influence directement notre catalogue, qui est composé de solutions qui s'adaptent à tous les styles ou besoins dans le monde de l'illumination.

Notre relation avec l'équipe de designers va plus loin que le contact professionnel, nous avons confiance sur leur savoir-faire, et leur méthodes de travail qui nous apporte fraîcheur et innovation , pour chacune de nos collections.



Carlos Santolaria

JW design



Wilfried Buelacher



Jackie Luo

Diseñadores-*Designers*



Santiago Sevillano

ITL_

Mantra collabora con un team di designer esterni molto diversi, specializzati in varie branche nel mondo del design.

Professionisti con esperienza nel settore dell'illuminazione che forniscono soluzioni innovative nello sviluppo di nuovi concetti, partecipando a tutti i processi di sviluppo del prodotto, dallo schizzo iniziale alla concezione del prodotto finale.

Questa ampia varietà di stili che ci offre influisce direttamente sul nostro catalogo, che è composto da soluzioni che si adattano a qualsiasi tipo di stile o esigenza nel mondo dell'illuminazione.

Il nostro trattamento con i designer va oltre un semplice trattamento professionale, confidiamo pienamente nel loro buon lavoro e nei loro metodi di lavoro che ci danno freschezza e innovazione in ciascuna delle nostre collezioni.



Hugo Tejada

ESP_

Mantra colabora con un equipo de diseñadores externos muy diverso, especializados en diversas ramas dentro del mundo del diseño.

Profesionales con experiencia en el sector de la iluminación que aportan soluciones novedosas en el desarrollo de nuevos conceptos, participando en todos los procesos de desarrollo del producto, desde el boceto inical hasta la concepción del producto final.

Esta gran variedad de estilos que nos ofrecen incide directamente en nuestro catálogo, el cual está compuesto por soluciones que se adaptan a cualquier tipo de estilo o necesidad dentro del mundo de la iluminación.

Nuestro trato con los diseñadores va más allá de un mero trato profesional, confiamos plenamente en su buen hacer y en sus métodos de trabajo que nos aporta frescura e inovación en cada una de nuestras colecciones.

INTERIOR/*INDOOR*

Aplique/*Wall light*





LUPPI

22



KUBICK

26



GOA

30



EYES

32



VENUS

34



ERIS

38



POLAR

44



DURBAN

48

MORNE

52



ASIMETRIC

54



ZANZIBAR

56



FUERTEVENTURA

62



TORCH

64



SAL

68



CAYMAN

72



CABARETE

74



BOAVISTA

76



GOCOVA

78



TARIFA

80



PREA

82



CAÏCOS

84



BAHIA

86



HABANA

88



BORA BORA

92

MURAL

98



TAHITI

100



TOJA

102



MINI

104



PARACURU

106

Plafón/*Ceiling*



KUBICK

108



TORCH

110



MURAL

112



MINI

116



ZERO E27

120



CUMBUCO

122



SAONA SUPERFICIE

128

Pie de salón/*Floor* **Sobremesa**/*Table lamp*



EYES

150



SAL

148



TORCH

152

MURAL

147



EYES

132



SAL

134



TORCH

136



TORCH

144



ZANZIBAR

138



CERES

140

Colgante/*Pendant*



HANOK
154



PAGODA
164



ORION
168



ANTARES
178



TORCH
188

ARUBA
190



CUMBUCO
123

Foco carril trifásico/*Triphasic rail spot*



ÍPSILON
210



PAGODA
214



ARUBA
218



SAL
220



FIJI
222



CARRILES
229

Foco superficie-regleta/*Spot light*

GLACIAR
192



IOS
194



SAL
196



GOWER
200



ARUBA
202



KAILUA
208



COLUMBRETES
206

Tiras Led/ *Led strips*



TIRAS LED
278



PERFILES
282



DRIVERS
285



SISTEMAS CONTROL
288

Campanas LED/*Ufo bays LED*



150W 4000K
294



200W 4000K
298



150W 5000K
296



200W 5000K
300

Empotrable/*Recessed*



ATLANTIS
276



BÁSICO GU10
258



BRANDON
266



CABRERA
246



CONFORT GU10
263



CONFORT IP
277



FORMENTERA
240



GARDA
238



CHUINCHO GU10
234



CHUINCHO
230



NEPTUNO
236



LAMBORJINI
268

METACRILATO
272



SAONA
252



MEDANO
250



GRACIOSA
274

EXTERIOR/*OUTDOOR*

Aplique/*Wall light*



CYCLE

302



POLINESIA

304



MAYA

306



RUKA

308



MERIBEL

310



TEJA

314



VOLCANO

316



IGUAZÚ

318



EVEREST

322



KANDANCHÚ

324



DAVOS

328



DAVOS XL

332

Aplique/*Wall light*



TRIAX

336



SOCHI

338



BORA

340



ARCS

342



JACKSON

343



UTAH

344



MERIBEL

346



SOLDEN

348



ALPINE

350



CHAMONIX

352



TAOS

354



LEVI

356

Plafón exterior/*Ceiling outdoor*



MAYA

358



VERBIER

360



CHAMONIX

362



BACHELOR

364



LEVI

366

Colgantes exterior/*Pendant outdoor*



POLINESIA

414



AVORIAZ

426



KINKÉ

418



MAYA

424

Baliza/*Bollard outdoor*



CHEVALIER

380



EVEREST

406



RUKA

408



TAOS

410

Señalizadores/*Step wall lights*



ASPEN

432



BAKER

428

Lámpara suelo & portátil exterior/*Ground lamps & portable outdoor*



POLINESIA

368



KLAPPEN

370



K3

372



ASTÚN

374



K2

376



SAPPORO

382

Sobremuro exterior/*Overwall outdoor*

FLAME

386



EVEREST

404



MAYA

400



RUKA

408



MERIBEL

402



MERIBEL

378

Lámpara de pie/*Floor lamp outdoor*



POLINESIA

390



ESPIGA

392

FLAME

398



K2

384



AVORIAZ

388

INTERIOR/*INDOOR*

Aplique-Wall light
HANOK 16
LUPPI 22
KUBICK 26
GOA 30
EYES 32
VENUS 34
ERIS 38
POLAR 44
DURBAN 48
MORNE 52
ASIMETRIC 54
ZANZIBAR 56
FUERTEVENTURA 62
TORCH 64
SAL 68
CAYMAN 72
CABARET 74
BOAVISTA 76
GOKOVA 78
TARIFA 80
PREA 82
CAÏCOS 84
BAHIA 86
BAHIA/HABANA 90
BORA BORA 92
MURAL 98
TAHITI 100
TOJA 102
MINI 104
PARACURU 106

Plafón-Ceiling lamp
KUBICK 108
TORCH 110
MURAL 112
MINI 116
ZERO E27 120
CUMBUCO 122
SAONA SUPERFICIE 128

Sobremesa-Table lamp
EYES 132
SAL 134
TORCH 136
ZANZIBAR 138
CERES 140
MURAL 144

Pie de Salón-Floor lamp
MURAL 145
SAL 148
EYES 150
TORCH 152

Lámpara lineal-Linear lamp
HANOK 154

Lámpara-Pendant lamp
PAGODA 164

Lámparas de techo-Pendant Lamp
ORION 168
ANTARES 178

Colgante-Pendant lamp
TORCH 188
ARUBA 190

Foco Superficie-Spotlight
GLACIAR 192

Foco Superficie/Aplique-Spot/ Wall Lamp
IOS 194

Regleta-Spot Light
SAL 196
GOWER 200
ARUBA 202
COLUMBRETES 206
KAILUA 208

Foco carril trifásico-Triphasic rail spot
ÍPSILON 210
PAGODA 214
ARUBA 218
SAL 220
FIJI 222
CARRÍL 228
GUINCHO 230
GUINCHO GU10 234
NEPTUNO 236
GARDA 238
FORMENTERA 242
CABRERA 248
MEDANO 250
SAONA 252
BÁSICO GU10 258
COMFORT GU10 262
BRANDON 266
LAMBOR JINI 268
METACRILATO 272
GRACIOSA 274
ATLANTIS 276
COMFORT IP 277
TIRAS 278
ALIMENTADORES 285
SISTEMAS 288
URANO 294

Empotrable-Recessed

EXTERIOR/*OUTDOOR*

Aplique exterior-Outdoor wall lamp
CYCLE 302
POLINESIA 304
MAYA 306
RUKA 308
MERIBEL 310
TEJA 314
VOLCANO 316
IGUAZÚ 318
EVEREST 322
KANDANCHU 324
DAVOS 328
DAVOS XL 332
TRIAX 336
SOCHI 338
BORA 340
ARCS 342
JACKSON 343
UTAH 344
MERIBEL 346
SOLDEN 348
ALPINE 350
CHAMONIX 352
TAOS 354
LEVI 356
MAYA 358

Plafón exterior Outdoor ceiling lamp
VERBIER 360
CHAMONIX 362
BACHELOR 364
LEVI 366

Sobremesa exterior Outdoor table lamp
POLINESIA 368
KLAPPEN 370
K3 372
ASTÚN 374
K2 376
SAPPORO 382

Sobremuro-overwall
MERIBEL 378

Balizas -OverWall
CHEVALIER 380
EVEREST 406
RUKA 408
TAOS 410

Pie De Salón exterior Outdoor floor lamp
POLINESIA 390
ESPIGA 392
K2 384
FLAME 398

Sobremuro-Overwall
MAYA 400
MERIBEL 402
EVEREST 404
RUKA 408
TAOS 410
FLAME 386

Colgante-Pendant
MERIBEL 378
POLINESIA 414
KINKÉ 418
MAYA 424
AVORIAZ 426

Señalizador-step wall
BAKER 428
ASPEN 432

HANOK

by David Villalba




7774 Blanco-*White*
LED 14W **3000K** 950lm

7775 Blanco-*White*
LED 14W **4000K** 1000lm


7776 Negro-*Black*
LED 14W **3000K** 950lm


7777 Negro-*Black*
LED 14W **4000K** 1000lm

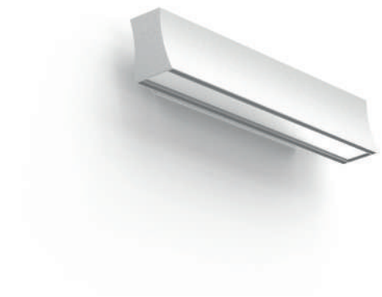












7546
pág. 154



7548
pág. 160





Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80




HANOK


110°


7778 Arena-*Sabbia*
LED 14W **3000K** 950lm















7569
pág. 158

110° | LED life / LED vida 50.000 h | ON / OFF 30.000 | garantía mantenimiento 5 años WARRANTY GARANTÍA LED | LED INCLUDED | IP20

Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80

HANOK

HANOK


110°

7770 Blanco-*White*
LED 38W **3000K** 2850lm


7771 Blanco-*White*
LED 38W **4000K** 3000lm


7772 Negro-*Black*
LED 38W **3000K** 2850lm


7773 Negro-*Black*
LED 38W **4000K** 3000lm

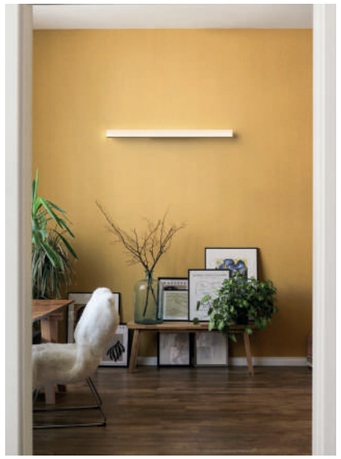



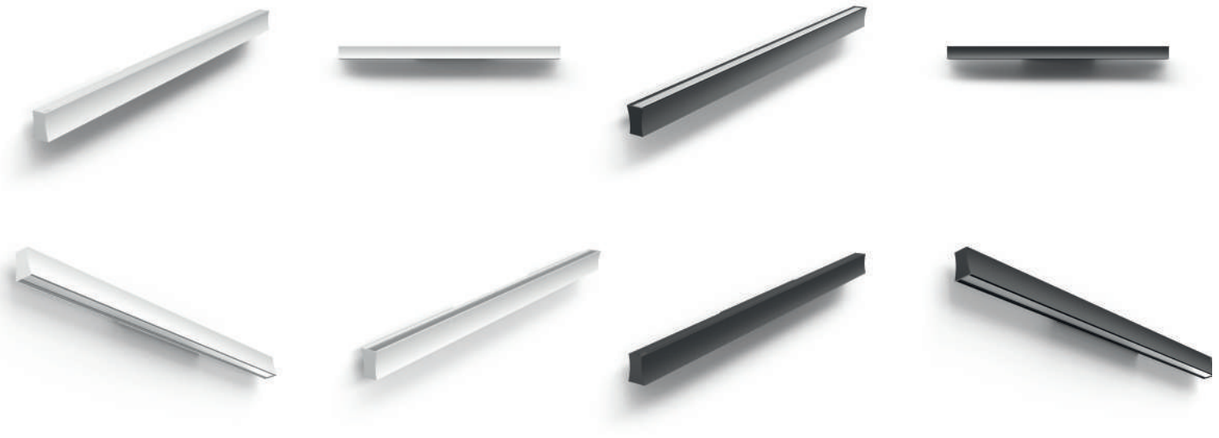

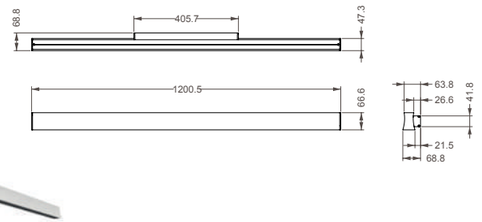



7546
pág. 154

7548
pág. 160

110° · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento 5 WARRANTY GARANTIA LED · LED INCLUDED · IP20


Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80


7694 Negro-*Black*
1L x GX53 (No incl)



7693 Blanco-*White*
1L x GX53 (No incl)



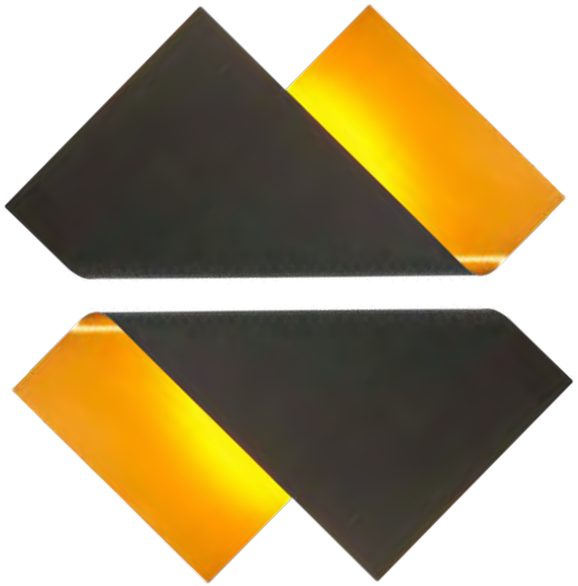

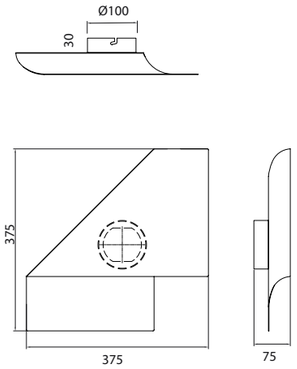



Bombillas Recomendadas/ Suggested Bulbs
R09224 R09225 R09248 R09249

9W 9W 12W 12W

garantía mantenga.org 2 AÑOS WARRANTY GARANTÍA

NOT INCLUDED


IP20


Metal-*Metal* 100-240V~ 50/60Hz GX53 máx. 15W LED (No incl)




7695 Arena-*Sabbia*

1L x GX53 (No incl)

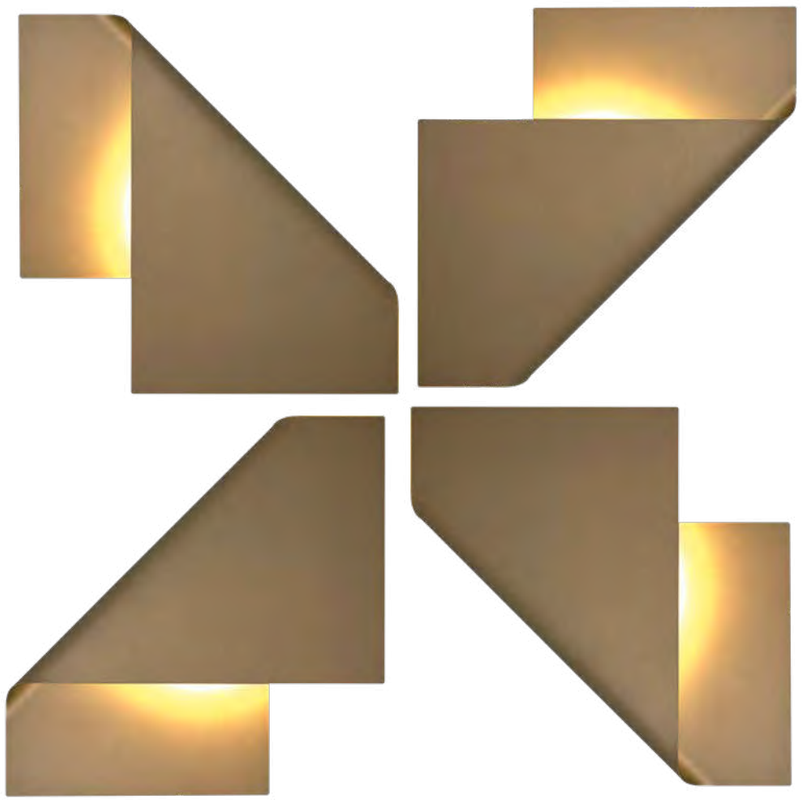







Bombillas Recomendadas/ Suggested Bulbs

R09224 R09225 R09248 R09249

9W 9W 12W 12W

garantia mantraco.org 2 YEAR AWARD WARRANTY GARANTÍA

NOT INCLUDED

IP20

Metal-*Metal* 100-240V~ 50/60Hz GX53 máx. 15W LED (No incl)



Aplique-*Wall light*

KUBICK
3000K


by José Ignacio Ballester



7590 Blanco-*White*
LED 12W+14W **3000K** 1630lm

7591 Blanco-*White*
LED 12W+14W **3000K** 1630lm
Dimmable






7594 Blanco-*White*
LED 13,5W+20W **3000K** 1870lm

7595 Blanco-*White*
LED 13,5W+20W **3000K** 1870lm
Dimmable






Dimmable · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80





KUBICK

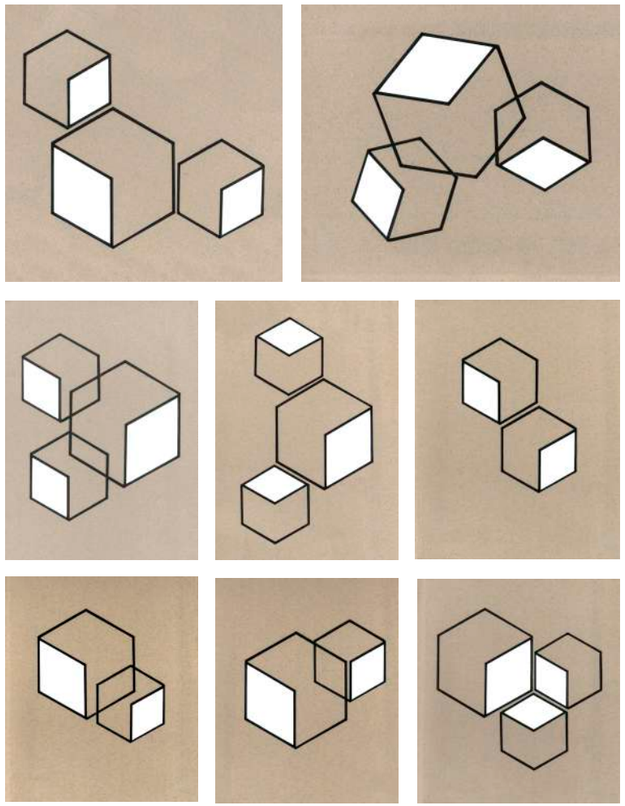


7596 Negro-*Black*
LED 13,5W + 20W **3000K** 1870lm

7597 Negro-*Black*
LED 13,5W + 20W **3000K** 1870lm
Dimmable

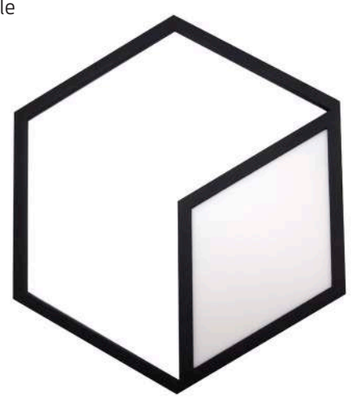




7592 Negro-*Black*
LED 12W +14W **3000K** 1630lm



7593 Negro-*Black*
LED 12W +14W **3000K** 1630lm
Dimmable



Dimmable · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenida con 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80




KUBICK
3000K


7760 Blanco Mate-*Matt White*
LED 18W+30W 2700lm


7761 Blanco Mate-*Matt White*
LED 18W+30W 2700lm
Dimmable

7762 Negro Mate-*Matt Black*
LED 18W+30W 2700lm

7763 Negro Mate-*Matt Black*
LED 18W+30W 2700lm
Dimmable

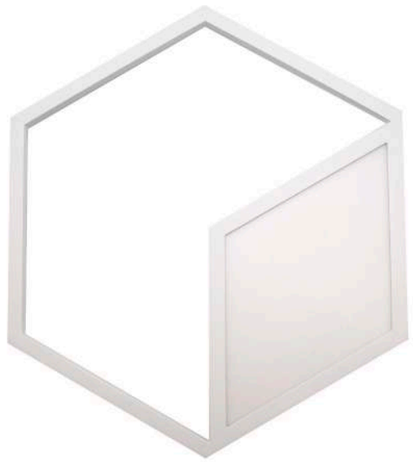

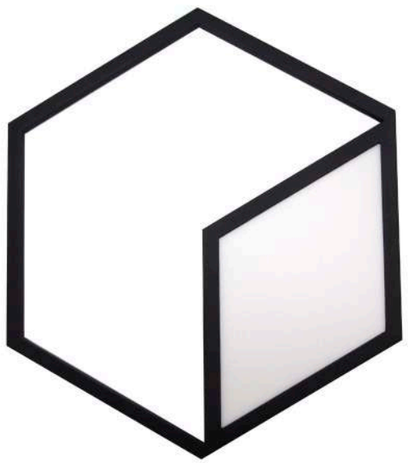

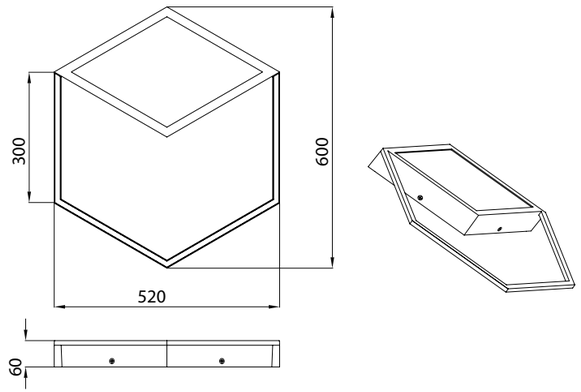

Dimmable · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantraco.com 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

Aplique-*Wall light*


GOA

by José Ignacio Ballester

3000K

7720 Blanco-*White*
LED 7.5W 660lm
Con interruptor-With switch



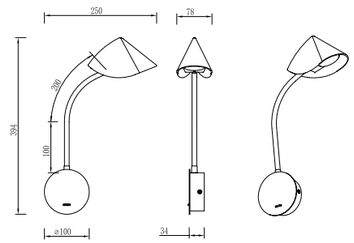



7721 Negro-*black*
LED 7.5W 660 m
Con interruptor-With switch



ON/OFF Incl.

ON / OFF 30.000


LED life / LED vida 20.000 h

garantía mantracos.com 5 años WARRANTY GARANTÍA LED

LED INCLUDED

IP20

Aluminio-*Aluminium* **100-250V 50/60Hz** CRI:≥ 80

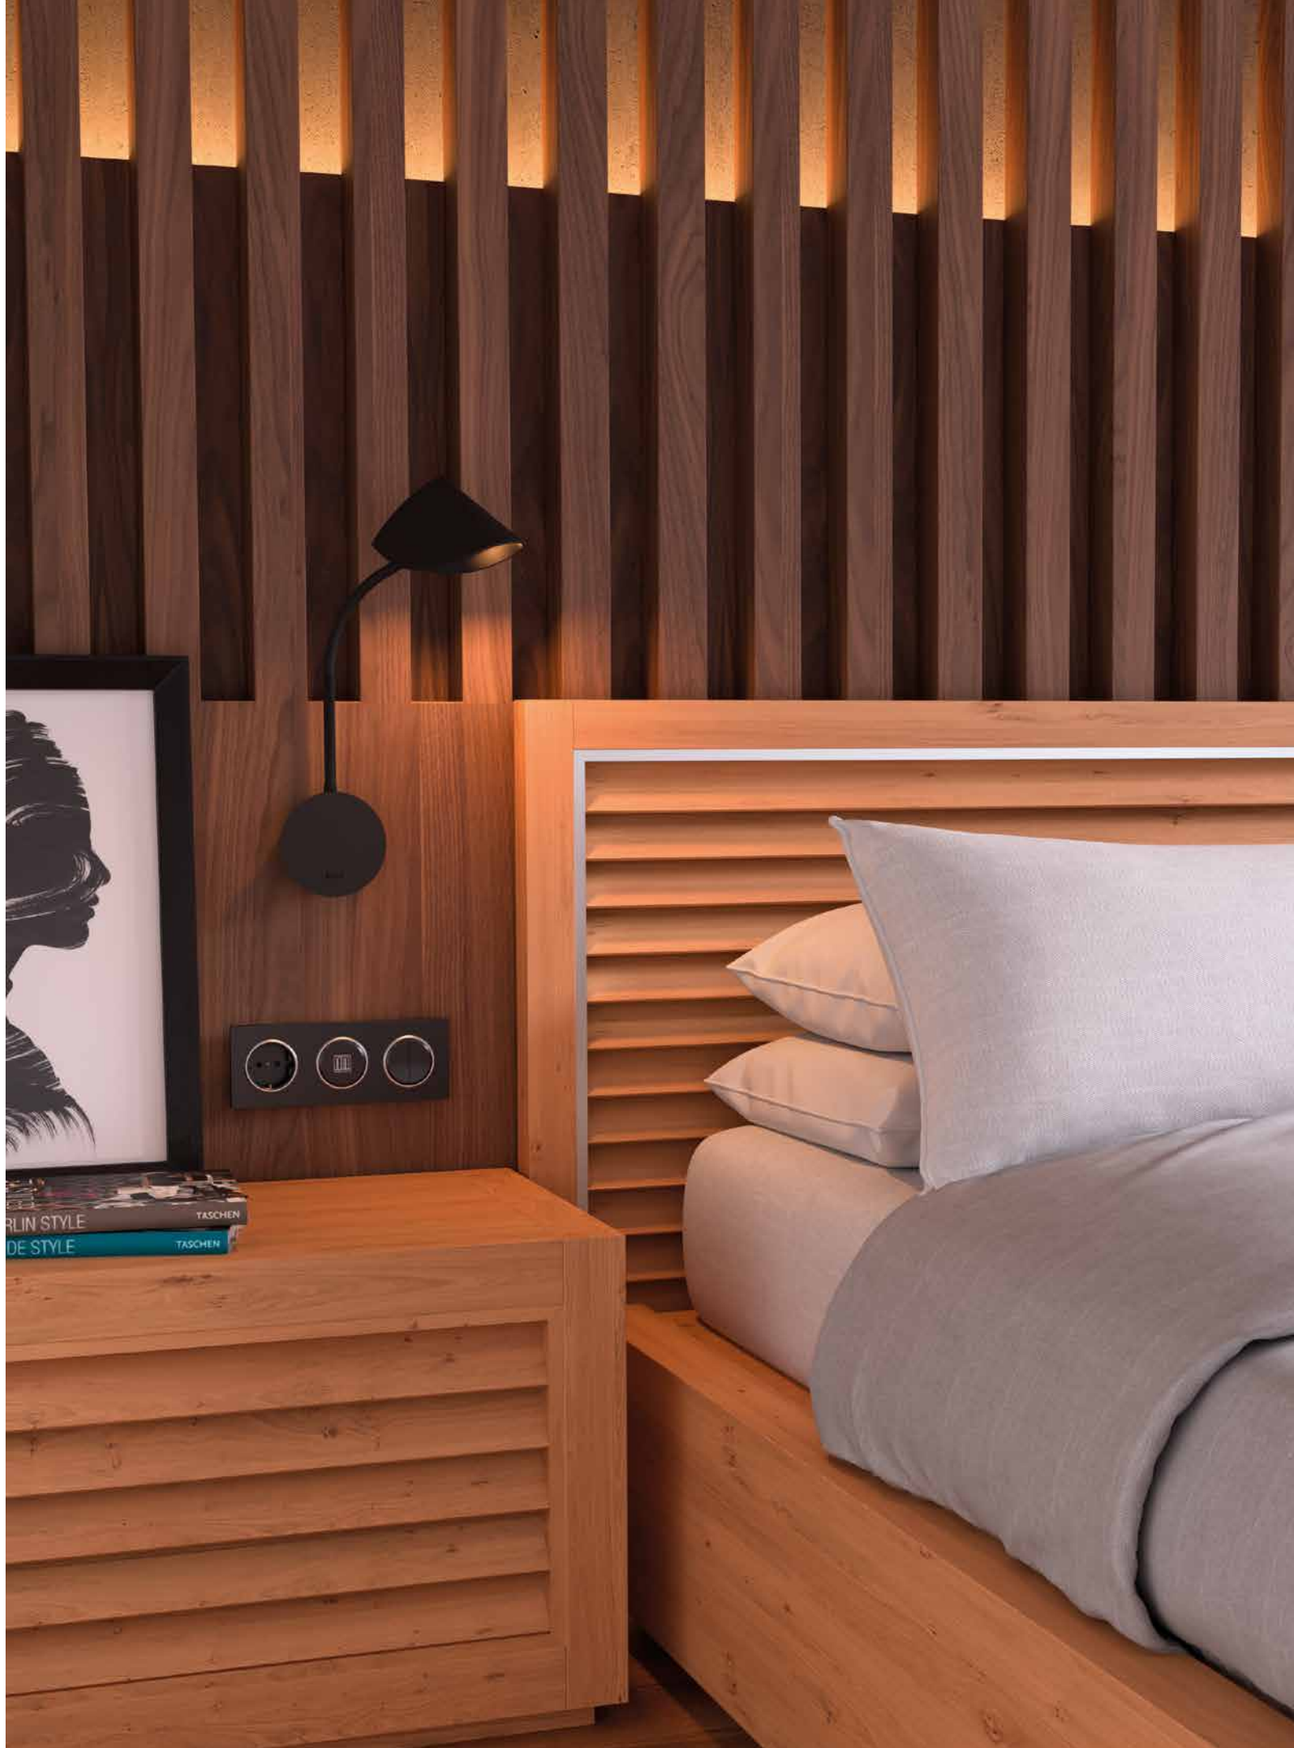


EYES

3000K


7513 Negro arena-Sand *black*
LED 6W 390lm
Sin interruptor-No switch





7510
pág. 132

7514 Negro arena-Sand *black*
LED 6W 390lm
Con interruptor-With switch



35° · ON / OFF 30.000 · LED life / LED vida 20.000 h · garantía mantraco.es 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20


Aluminio-*Aluminium* **100-240V~ 50/60Hz** CRI:≥ 80


VENUS

Aplique/Perchero- Wall Lamp /Coat Rack

by Hugo Tejada

7293 Negro-Black
LED 6W 490lm

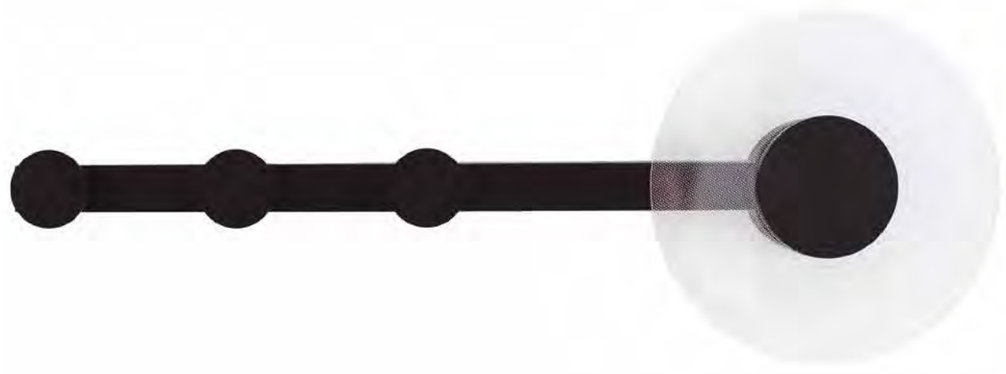

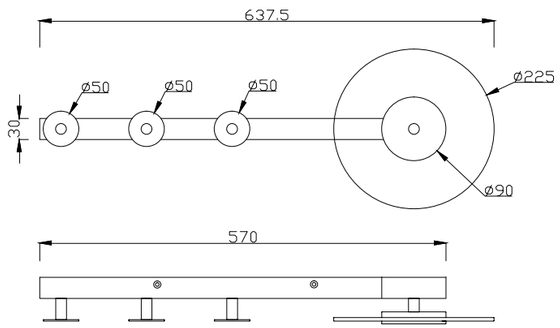


Aluminio/acríclico-*Aluminium/acrylic* 220-240V~ 50/60Hz CRI≥ 80


DRIVER TÜV Registered **Nº 007663331-0016**

VENUS

Aplique/Perchero- Wall Lamp /Coat Rack

7292 Blanco-*White*
LED 6W 490lm

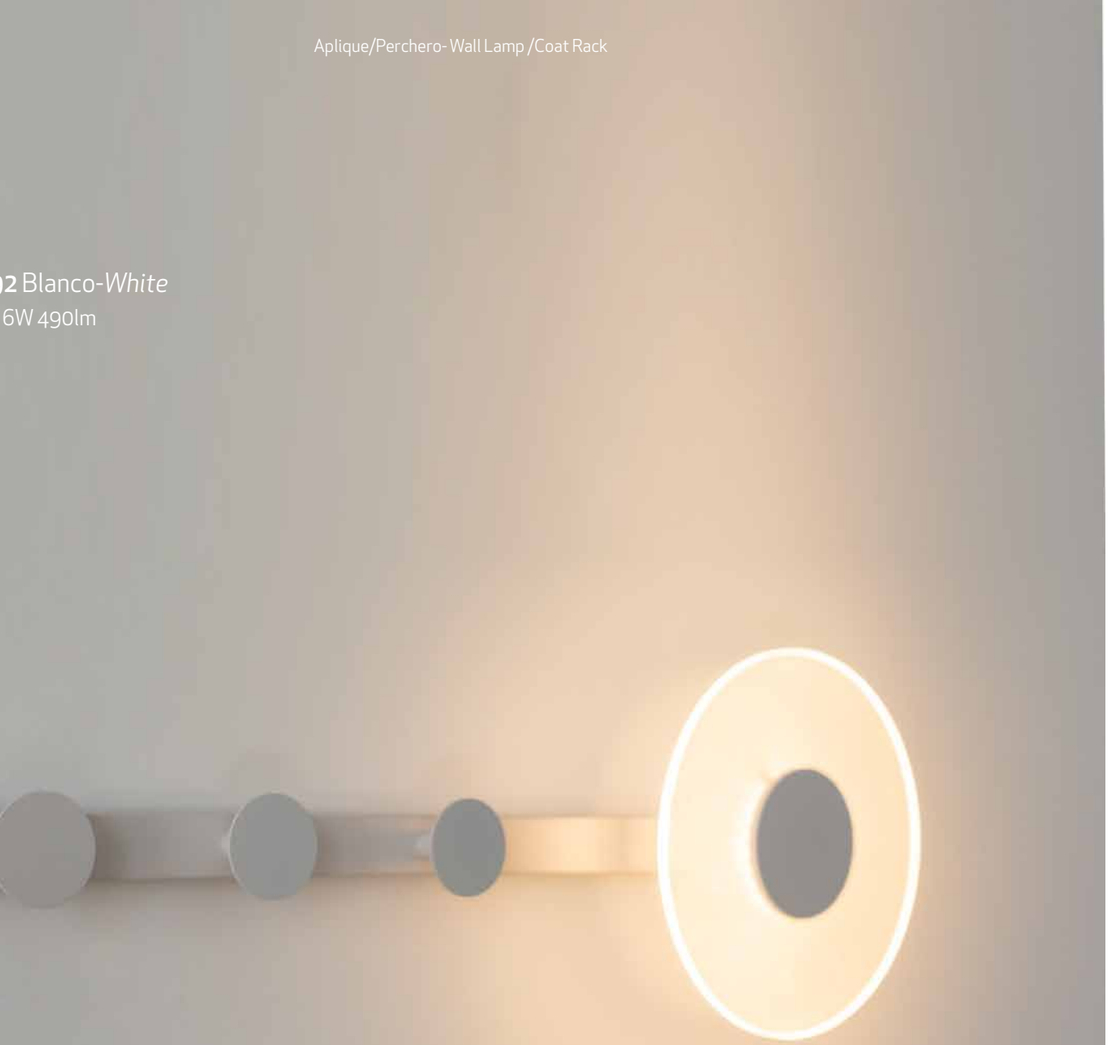


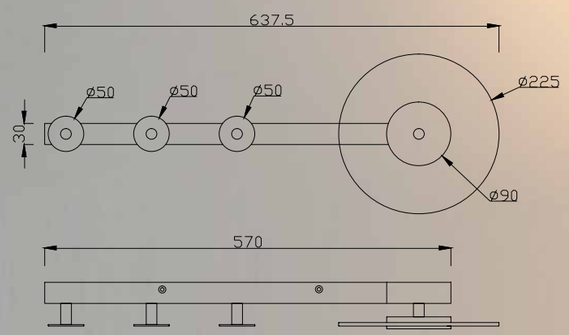

LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenga 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio/acrílico-*Aluminium/acrylic* 220-240V~ 50/60Hz CRI≥ 80




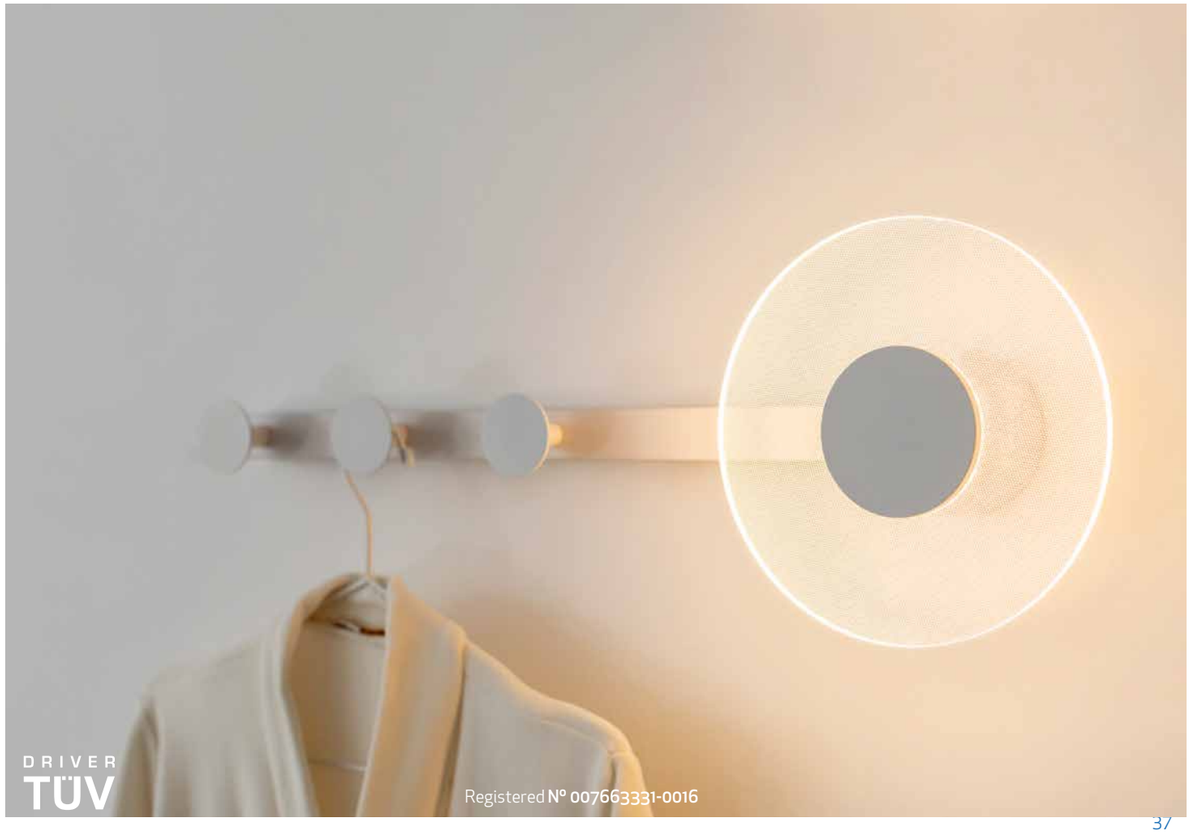

ERIS


Aplique-*Wall Lamp*


by Hugo Tejada

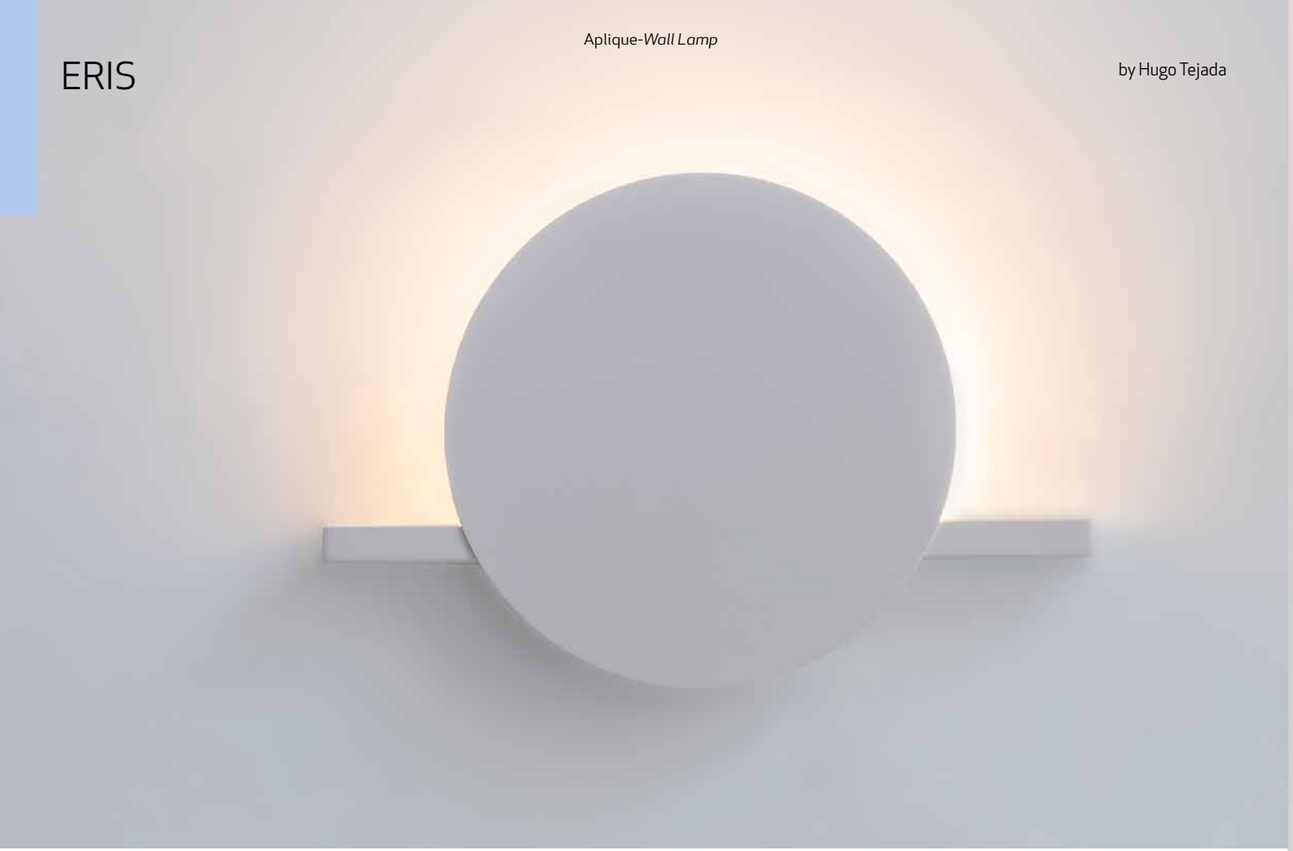

7296 Blanco-*White*
LED 8W 640lm

7297 Negro-Black
LED 8W 640lm

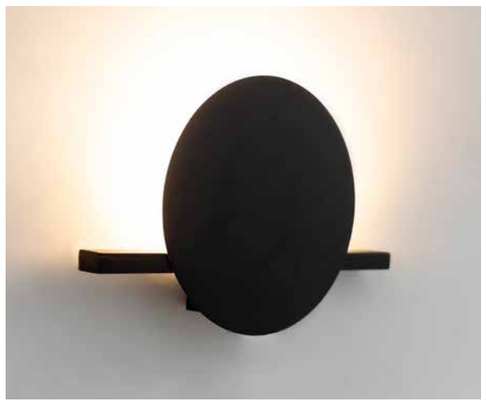

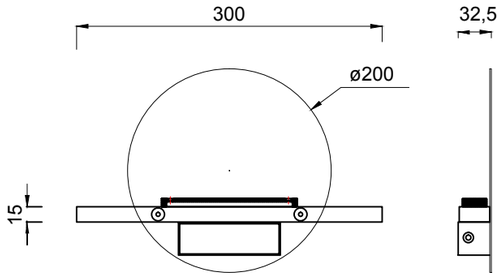

LED life / LED vida 30.000 h
ON / OFF 30.000
garantía mantenimiento 5 años WARRANTY GARANTIA LED
LED INCLUDED
IP20

Aluminio-*Aluminium*220-240V~ 50/60Hz CRI≥ 80



ERIS
3000K




DRIVER
TÜV

Registered Nº 007663331-0012


Aplique-*Wall Lamp*


ERIS

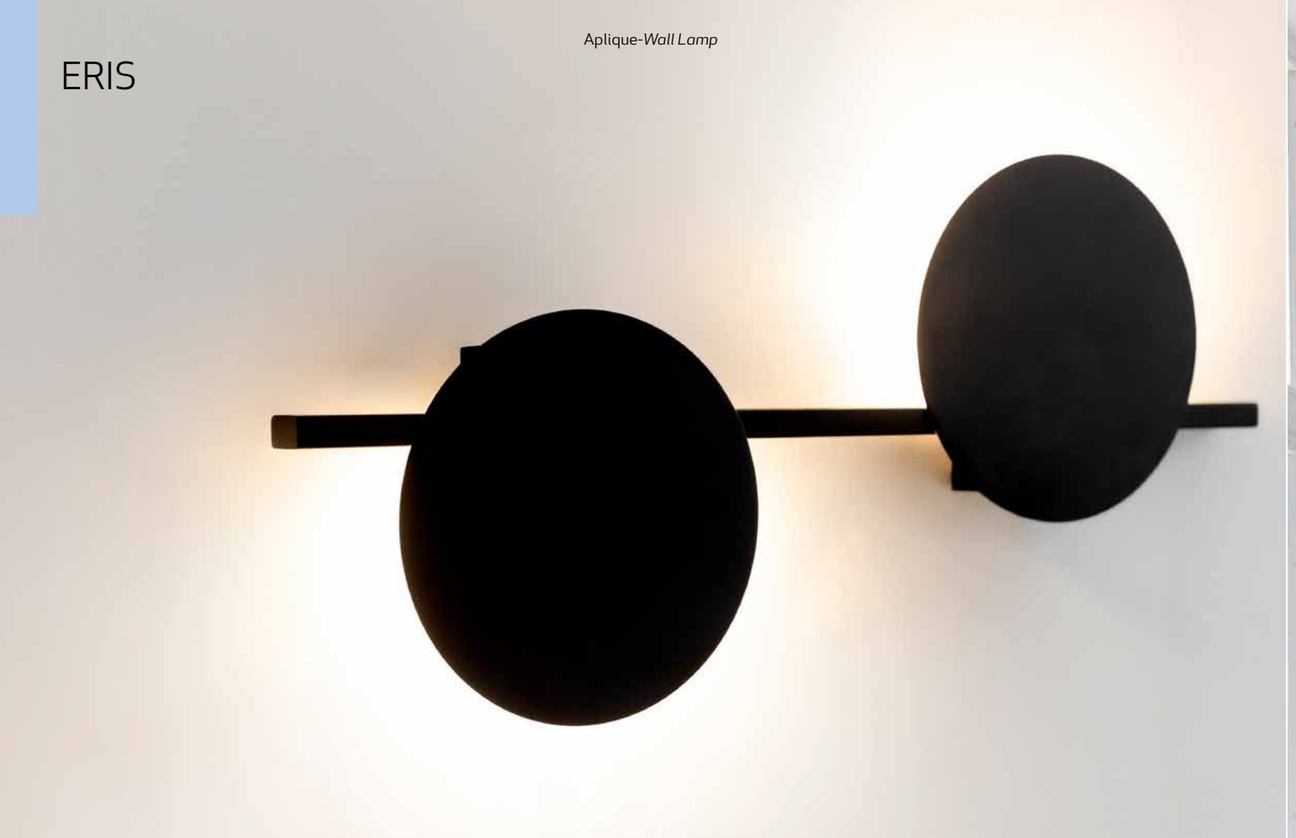

7299 Negro-Black
LED 16 W 1280lm

7298 Blanco-*White*
LED 16 W 1280lm

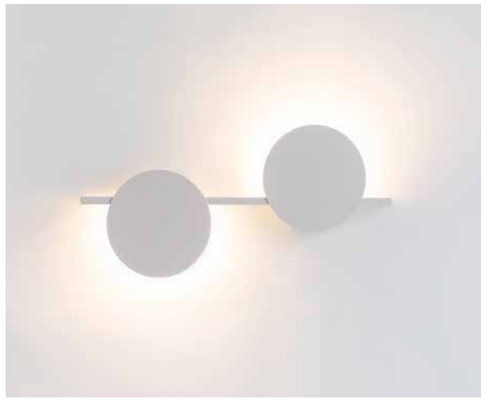

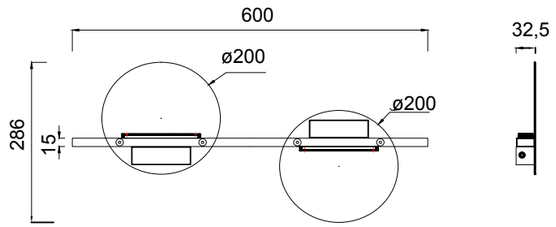

LED life / LED vida 30.000 h
ON / OFF 30.000
garantía mantenimiento 5 años WARRANTY GARANTIA LED
LED INCLUDED
IP20

Aluminio-*Aluminium*220-240V~ 50/60Hz CRI≥ 80




ERIS
3000K

DRIVER
TÜV

Registered Nº 007663331-0012


Aplique-*Wall Lamp*


ERIS

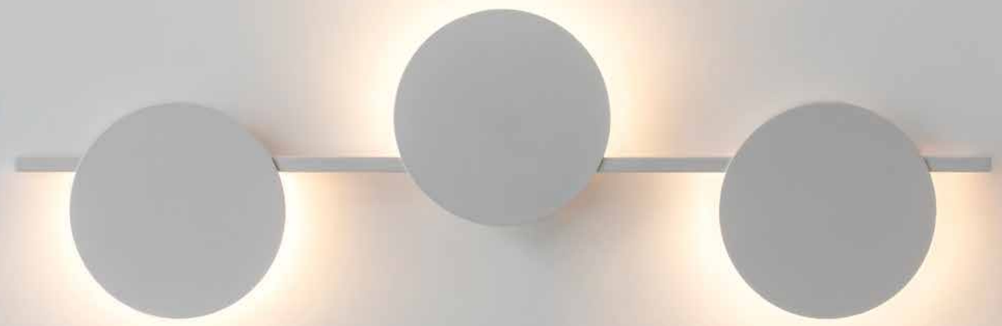

7300 Blanco-*White*
LED 24W 1920lm

7301 Negro-Black
LED 24W 1920lm

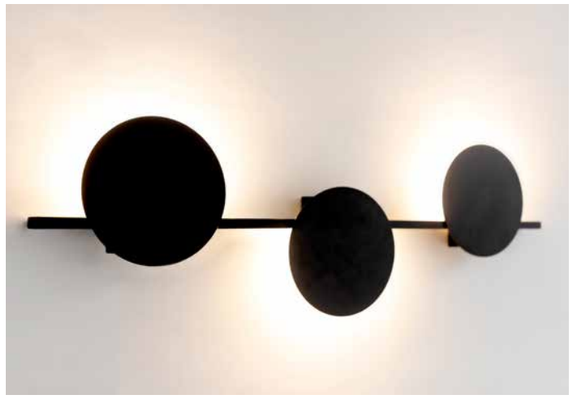

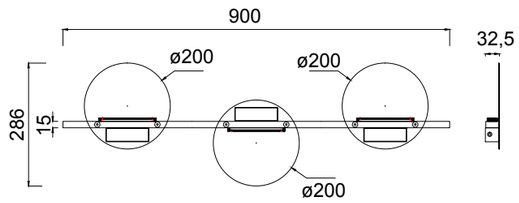



Aluminio-*Aluminium*220-240V~ 50/60Hz CRI≥ 80





Registered Nº 007663331-0012


POLAR

Aplique/Perchero- Wall Lamp /Coat Rack

by Hugo Tejada

7240 Blanco-*White*
LED 6W 540lm





LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantracc.com 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80


DRIVER
TÜV

Registered N° 007663331-0015

POLAR

7241 Negro-*Black*
LED 6W 540lm





LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

DRIVER TÜV

Registered Nº 007663331-0015

DURBAN
3000K

7175 Negro-*Black*
LED 10W 780lm **100-250V**




7176 Negro-*Black*
LED 20W 1550lm **100-250V**



7177 Negro-*Black*
LED 30W 2300lm **220-240V**





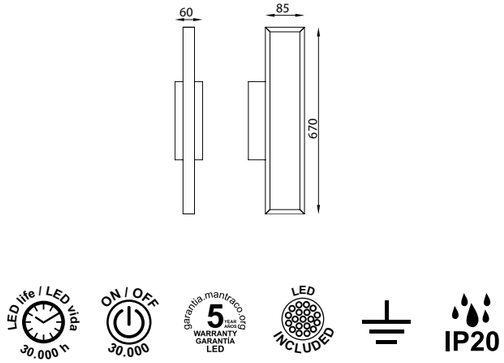

Aluminio-*Aluminum* 50/60Hz CRI≥ 80


DURBAN
3000K



DURBAN
3000K


7197 Blanco-*White*
LED 10W 780lm **100-250V**






7198 Blanco-*White*
LED 20W 1550lm **100-250V**





7199 Blanco-*White*
LED 30W 2300lm **220-240V**







Aluminio-*Aluminum* 50/60Hz CRI⩾ 80



MORNE
4000K

7482 Negro-*Black*
LED 12W 1080lm

6760 Cromo-*Chrome*
LED 12W 1080lm

6763 Blanco-*White*
LED 12W 1080lm

7483 Negro-*Black*
LED 16W 1440lm

6761 Cromo-*Chrome*
LED 16W 1440lm


7480 Blanco-*White*
LED 16W 1440lm

7484 Negro-*Black*
LED 20W 1800lm


6762 Cromo-*Chrome*
LED 20W 1800lm

7481 Blanco-*White*
LED 20W 1800lm


12W





16W

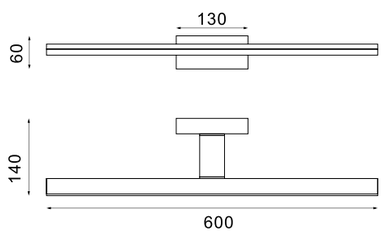

20W

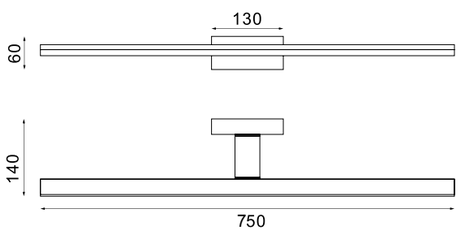

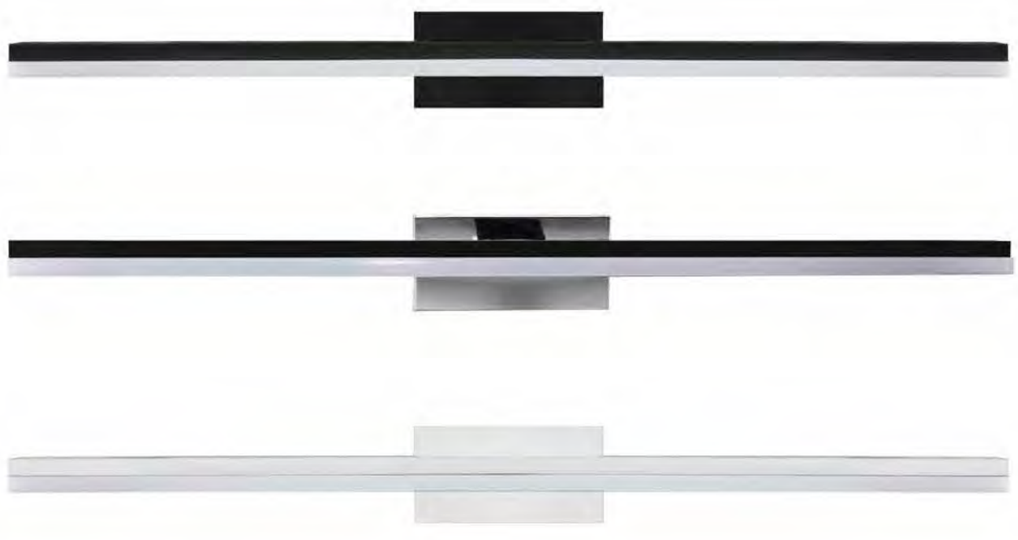

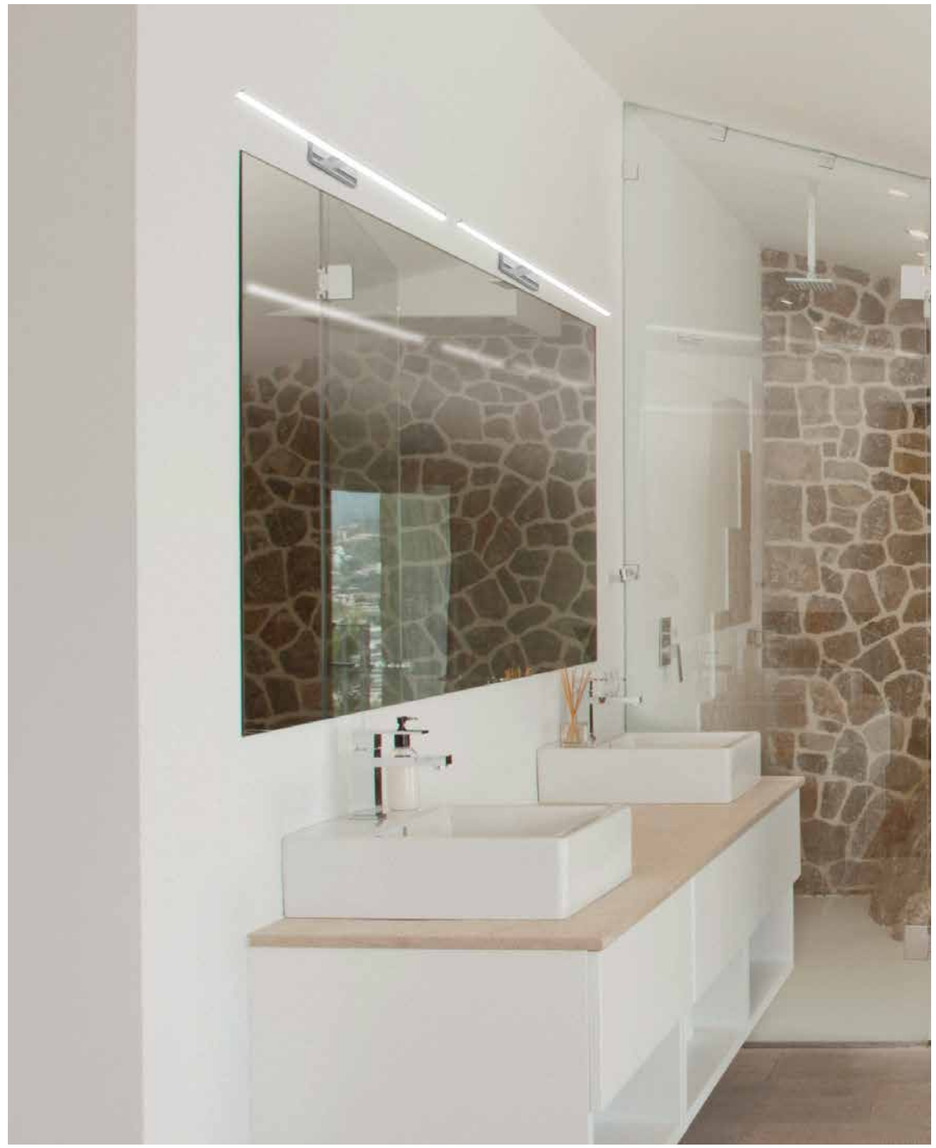





Aluminio/Pc-*Aluminium /Pc* **220-240V~ 50/60Hz** CRI:≥ 80

ASIMETRIC

by Santolaria & Lluscà

6222 Negro-*Black*
1L x GX53

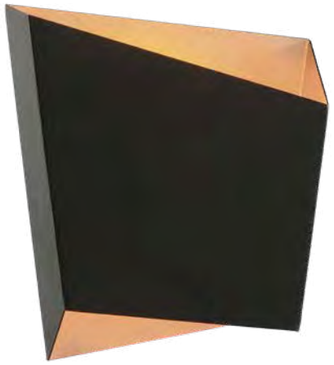




6220 Blanco-*White*
1L x GX53



6221 Blanco-*White*
1L x GX53









Bombillas Recomendadas/ Suggested Bulbs
R09224 R09225 R09248 R09249


9W 9W 12W 12W

garantía mantraco.org 2 WARRANTY GARANTÍA

NOT INCLUDED

IP20

Metal-*Metal* 100-240V~ 50/60Hz máx. 12W LED

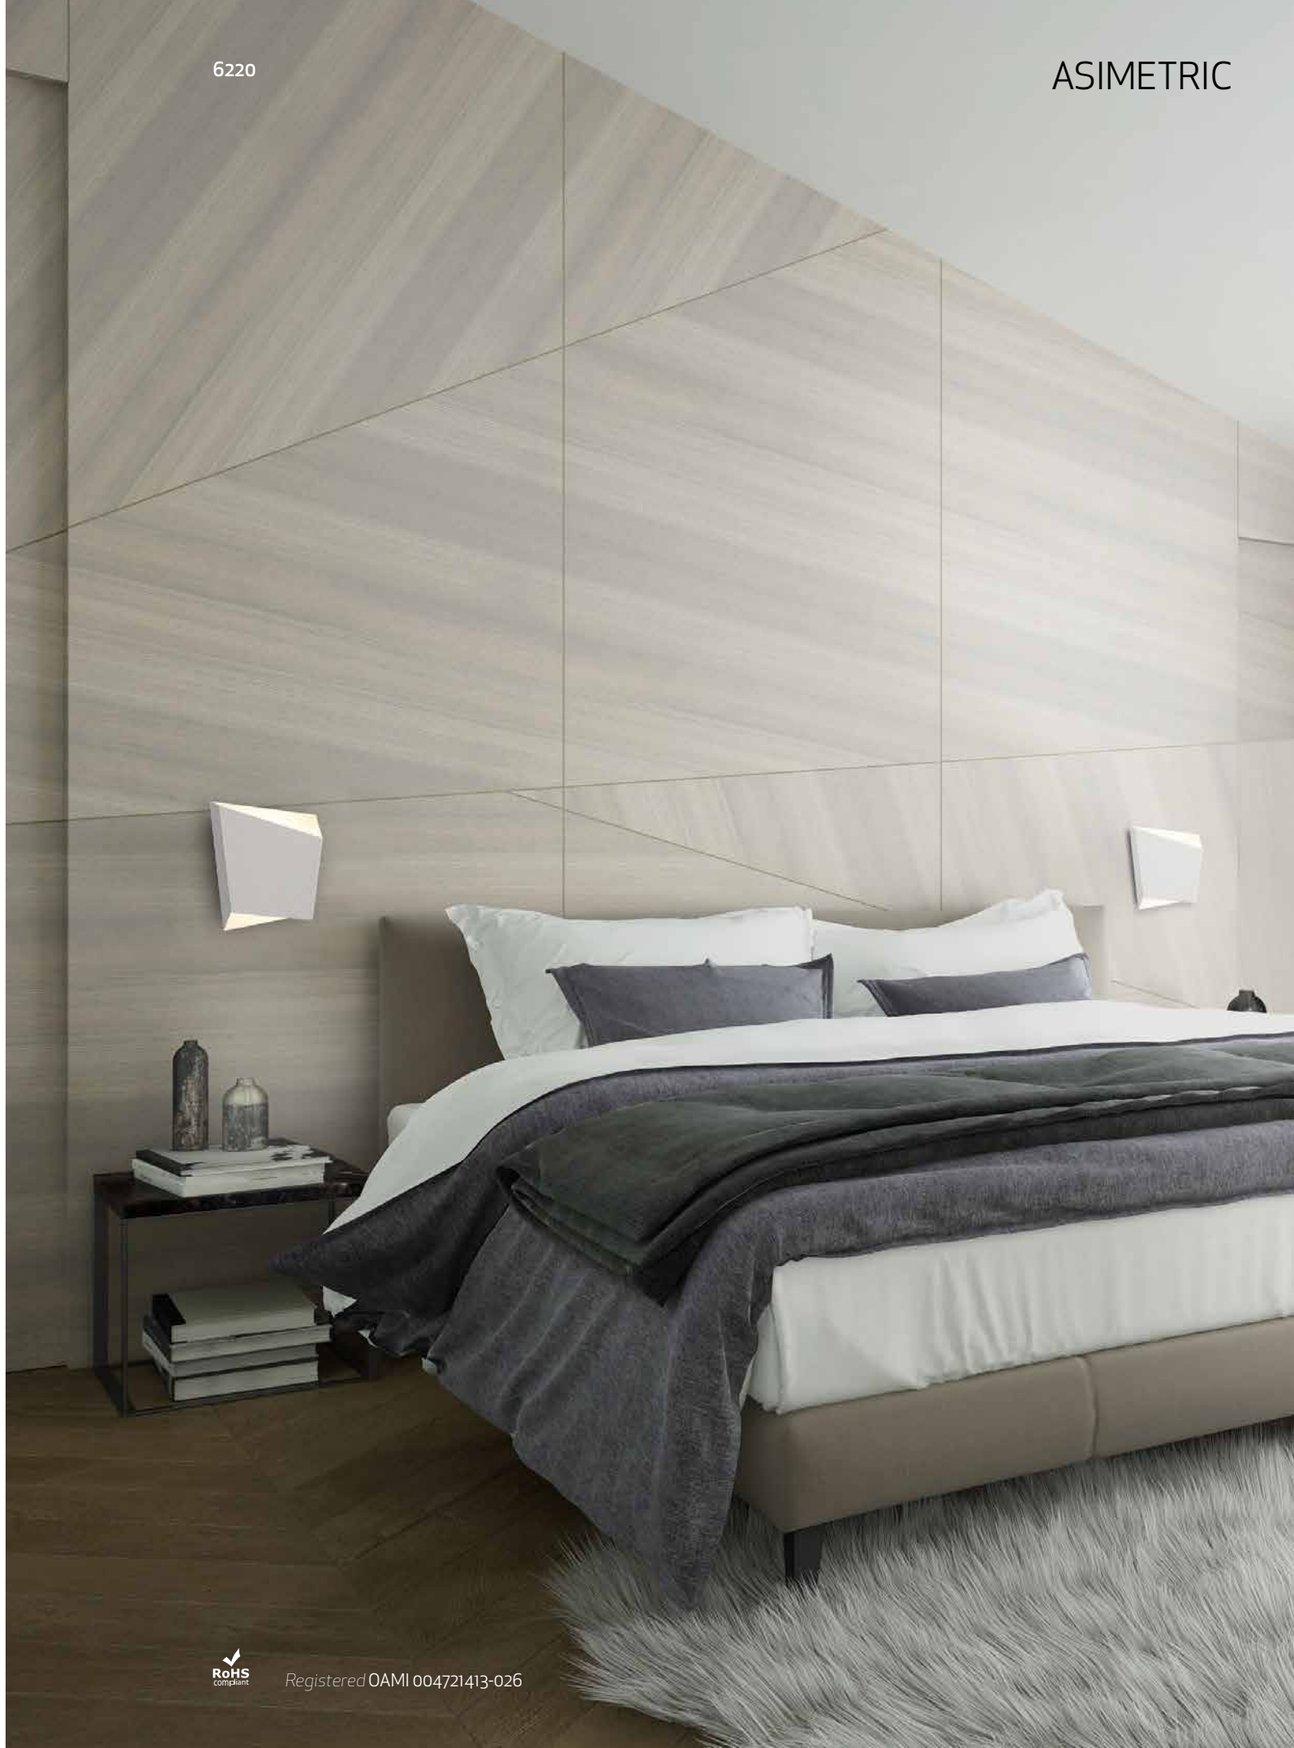

RoHS compliant

Registered OAMI 004721413-026

ZANZIBAR

3000K

6755 Negro Mate-*Matt Black*
LED 3W 210lm



6754 Blanco Mate-*Matt White*
LED 3W 210lm




*** Cargador De Inducción Teléfono-*Cell Phone Induction Charger***





LED 3W 210lm



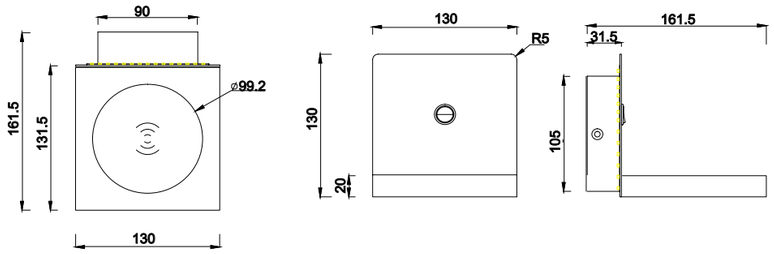




6716
pág. 138

ON/OFF Incl. · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantia.mantraco.com 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio/Metal-*Aluminium/Metal* 100-240V~ 50/60Hz CRI:≥ 80

ZANZIBAR

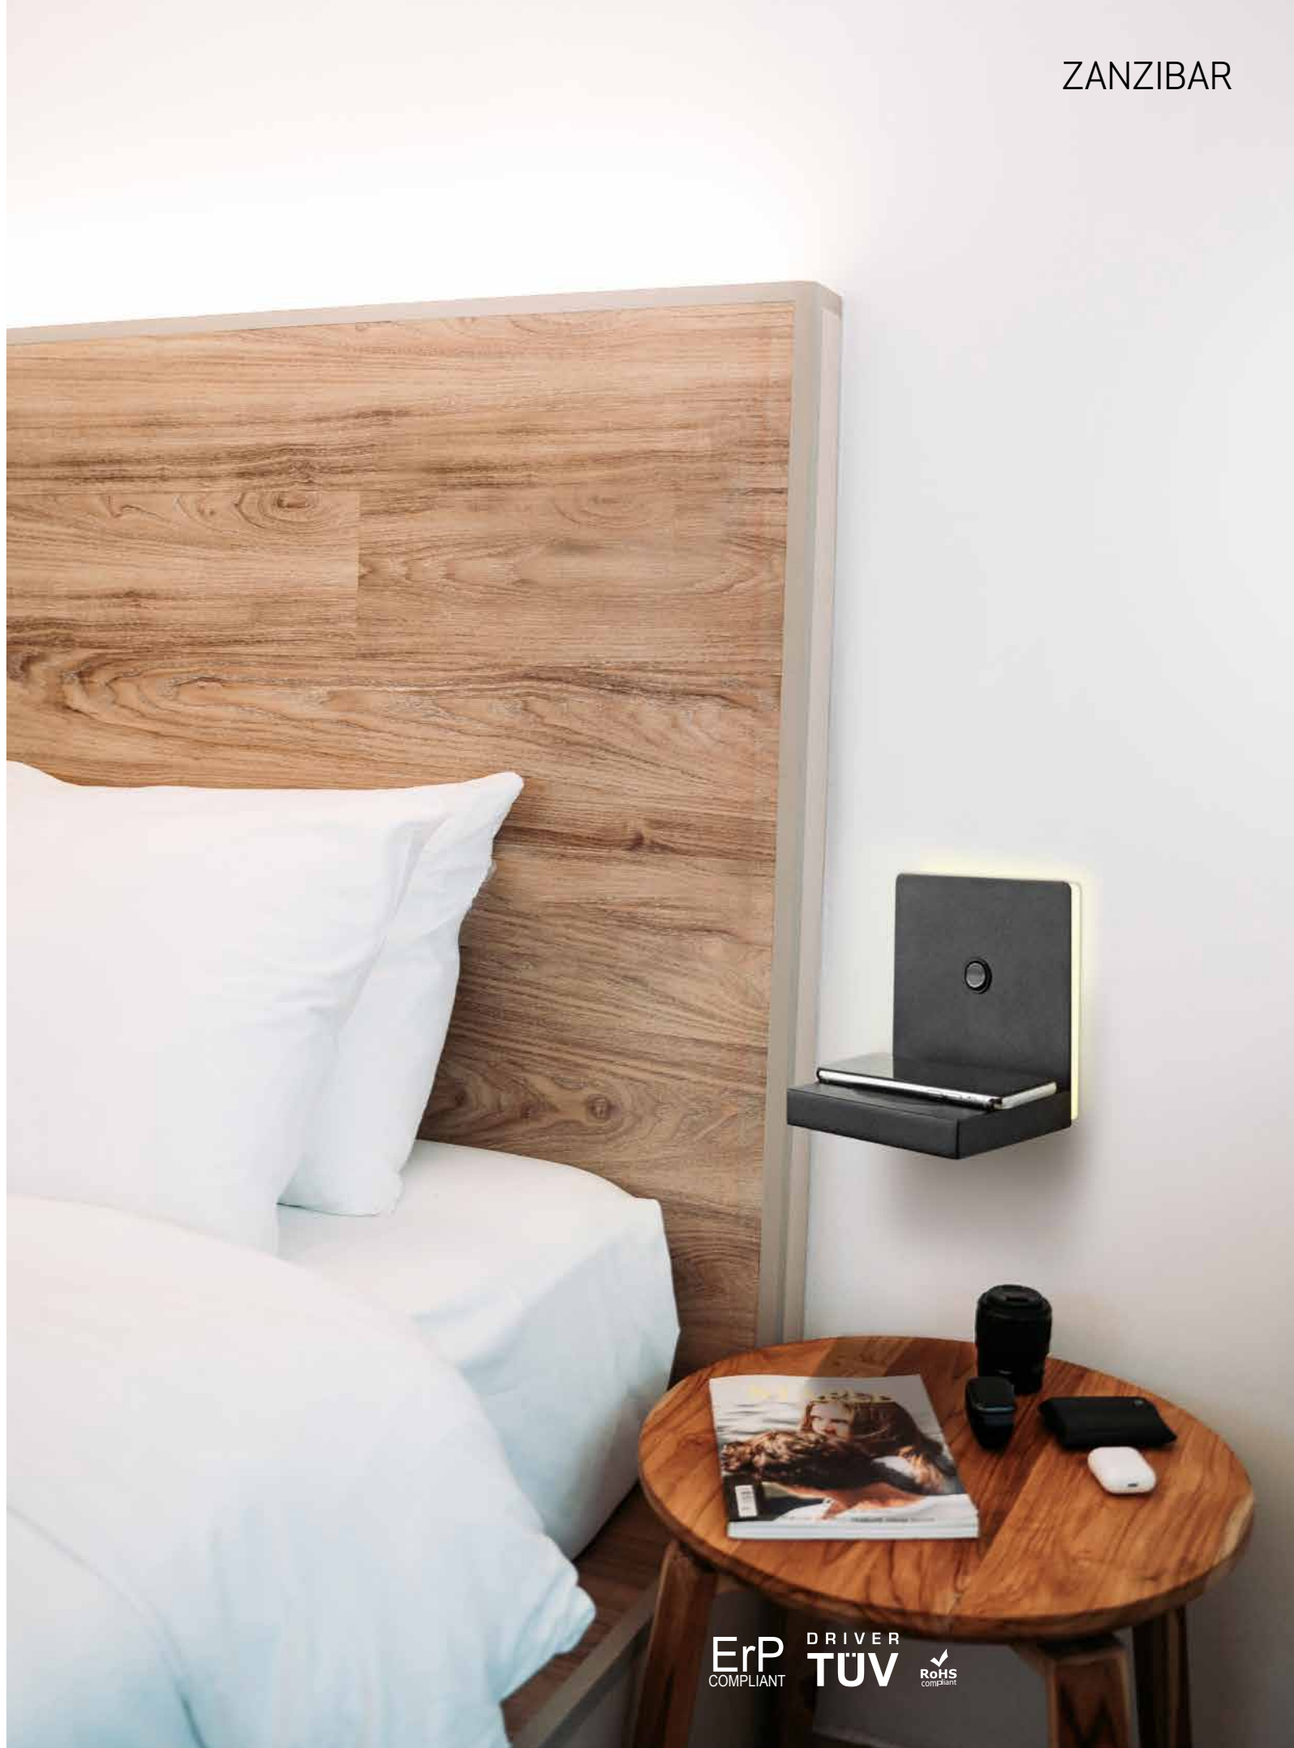

ZANZIBAR

3000K


6752 Negro Mate-*Matt Black*
LED 3W 210lm



6750 Blanco Mate-*Matt White*
LED 3W 210lm



***** Cargador De Inducción Teléfono-*Cell Phone Induction Charger*

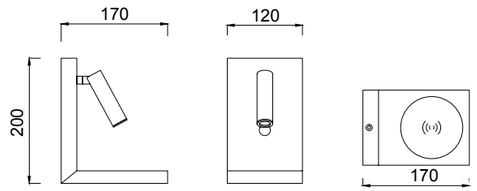



6716
pág. 138

ON/OFF Incl. · LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenga 5 WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio/Metal-*Aluminium/Metal* 100-240V~ 50/60Hz CRI:≥ 80



ZANZIBAR

3000K


6753 Negro Mate-*Matt Black*
LED 6W 470lm



6751 Blanco Mate-*Matt White*
LED 6W 470lm



*** Cargador De Inducción Teléfono-*Cell Phone Induction Charger***





6716
pág.138

ON/OFF Incl. · LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantracon 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio/Metal-*Aluminium/Metal* 220-240V~ 50/60Hz CRI:≥ 80





FUERTEVENTURA


3000K

6865 Blanco Mate-*Matt White*
LED 9W 600lm



6866 Negro Mate-*Matt Black*
LED 9W 600lm







Acero/Acrílico-*Steel/Acrylic* 100-250V~ 50/60Hz CRI:≥ 80








TORCH

3000K

6701 Negro Mate-*Matt Black*
LED 6W 410lm





6700 Blanco Mate-*Matt White*
LED 6W 410lm






360º



6736
pág. 152



6738
pág. 136



6826
pág. 188



6828
pág. 110



Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80


TORCH

TORCH

3000K

6703 Negro Mate-*Matt Black*
LED 3W+6W 410lm+210lm



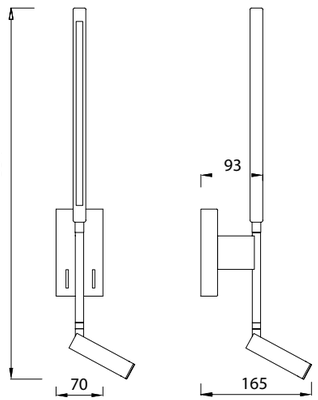

6702 Blanco Mate-*Matt White*
LED 3W+6W 410lm+210lm










6736
pág. 152



6738
pág. 136




6826
pág. 188



6828
pág. 110




Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

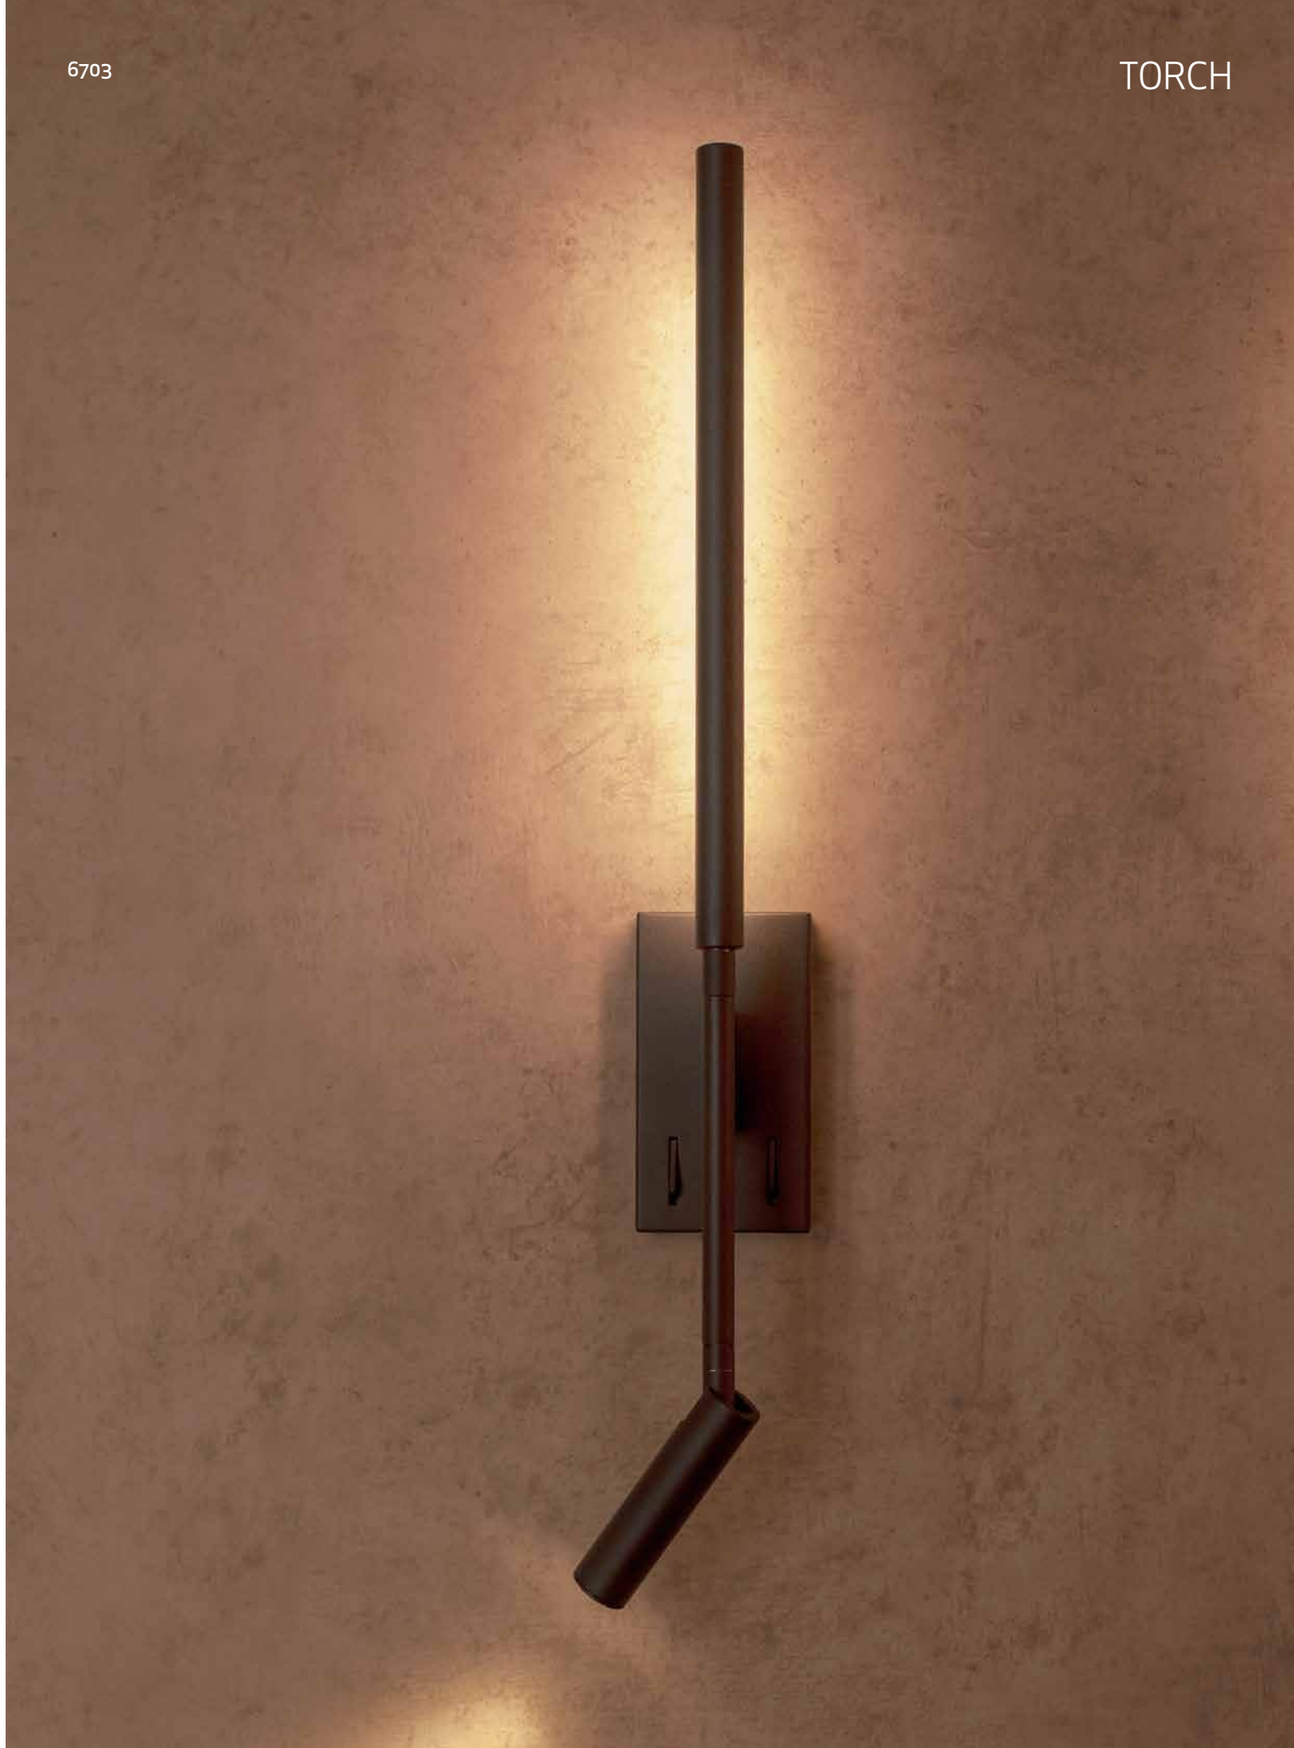


7523 Blanco Mate-*Matt White*
1L×GU10
Sin interruptor-No switch






7518 Negro Mate-*Matt Black*
1L×GU10
Sin interruptor-No switch





7524 Blanco Mate-*Matt White*
1L×GU10
Con interruptor-With switch





7519 Negro Mate-*Matt Black*
1L×GU10
Con interruptor-With switch



ON/OFF Incl.

garantía manufacturer 2 WARRANTY GARANTIA

NOT INCLUDED

IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz máx. 10W LED





6283
pág. 70



6281
pág. 196



6717
pág. 220




7522
pág. 148




Bombillas Recomendadas/ Suggested Bulbs
R09196 R09214 R09197


6284 Blanco Mate-*Matt White*
1L×GU10
Con interruptor-With switch





6283 Blanco Mate-*Matt White*
1L×GU10
Sin interruptor-No switch

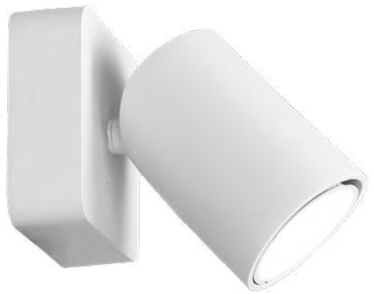



6714 Negro Mate-*Matt Black*
1L×GU10
Con interruptor-With switch



6713 Negro Mate-*Matt Black*
1L×GU10
Sin interrupto-No switch



ON/OFF Incl. · garantía mantraco.com 2 WARRANTY GARANTÍA · NOT INCLUDED · IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz máx. 10W LED



ErP COMPLIANT · RoHS compliant



6283
pág. 70



6281
pág. 196



6717
pág. 220



7522
pág. 148



Bombillas Recomendadas/ Suggested Bulbs
R09196 R09214 R09197

CAYMAN

3000K

6080 Blanco Mate-*Matt White*
LED 3W+6W 210+410lm




6081 Satin-*Satin*
LED 3W+6W 210+410lm



6083 Negro Mate-*Matt Black*
LED 3W+6W 210+410lm

6082 Cuero-*Antique Brass*
LED 3W+6W 210+410lm



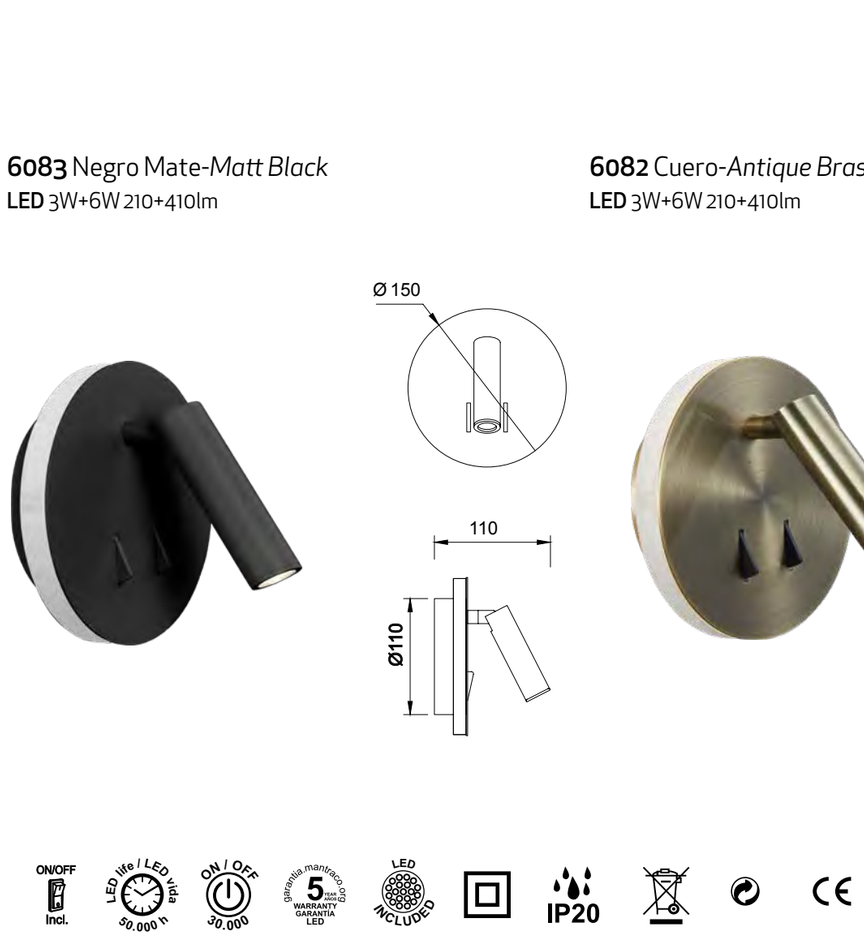

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80



CABARET

3000K

5715 Blanco-*White*
LED 3+3 W 470lm



ON/OFF Incl.
LED life / LED vida 30.000 h
ON / OFF 30.000
garantía mantracor 5 años WARRANTY GARANTÍA LED
LED INCLUDED
IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI.> 80

Aplique-*Wall light*

CABARET

3000K

5714 Negro Mate-*Matt Black*
LED 3+3 W 470lm



ErP COMPLIANT
DRIVER TÜV
RoHS compliant


BOAVISTA

3000K

6046 Blanco-*White*

LED 3W 185lm






6050 Blanco-*White*

LED 5W 285lm




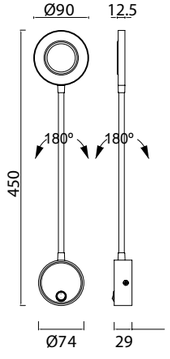

6048 Blanco-*White*

LED 3W 185lm





ON/OFF Incl.

LED life / LED vida 30.000 h

ON / OFF 30.000

garantía mantraco.com 5 años WARRANTY GARANTÍA LED

LED INCLUDED

IP20

Aluminio Acrílico-*Aluminium Acrylic* 100-240V~ 50/60Hz CRI:≥ 80


BOAVISTA

3000K

6051 Negro-*Black*

LED 5W 285lm




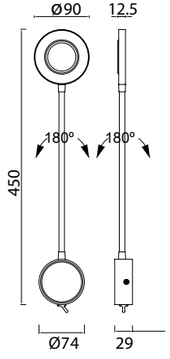

6047 Negro-*Black*

LED 3W 185lm






6049 Negro-*Black*

LED 3W 185lm





ErP COMPLIANT

DRIVER TÜV

RoHS compliant

GOKOVA


3000K

6820 Blanco Arena-*Sand White*
LED 3W 210lm




6821 Negro Arena-*Sand Black*
LED 3W 210lm





L 153 * W 41 * D 29 mm

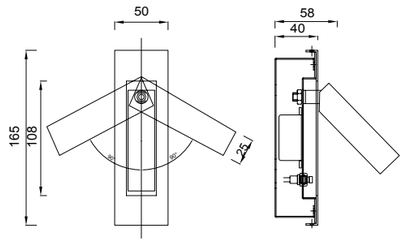



Metal/Aluminio-*Metal/Aluminium* 100-240V~ 50/60Hz CRI:≥ 80



TARIFA

3000K

6070 Blanco-*White*
LED 3W 210lm




6071 Satin-*Satin*
LED 3W 210lm




6072 Cuero-*Antique Brass*
LED 3W 210lm



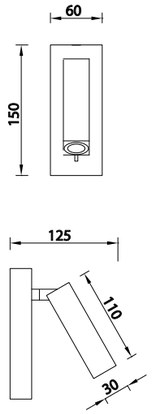

ON/OFF Incl. · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz CRI:≥ 80

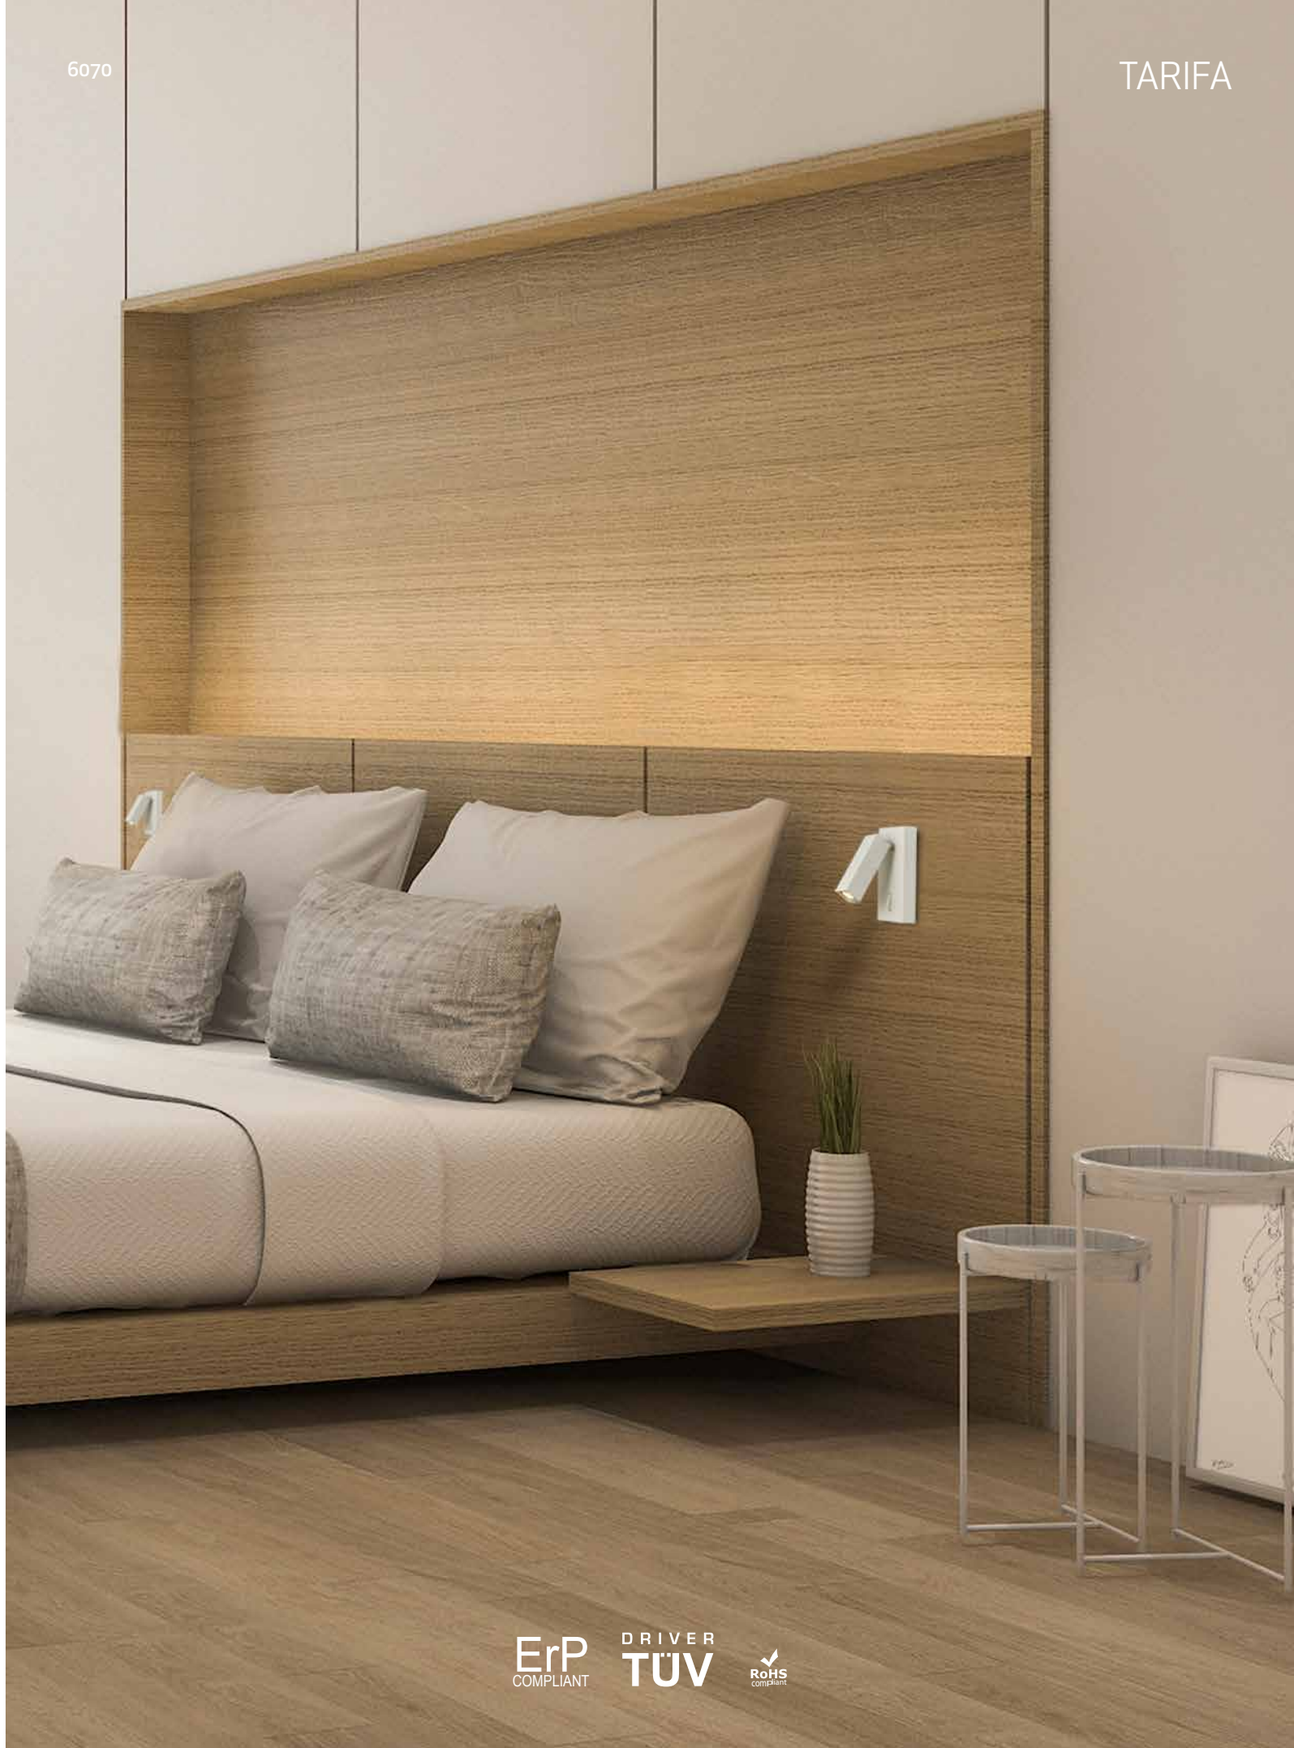

PREA

3000K

6075 Blanco-*White*
LED 3W 210lm




6076 Satin-*Satin*
LED 3W 210lm



6077 Cuero-*Antique Brass*
LED 3W 210lm





ON/OFF Incl. · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantracon 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz CRI:≥ 80



Aplique-*Wall light*

6091 Blanco-*White*




6092 Satin-*Satin*



6093 Cuero-*Antique Brass*





1L × E27 máx. 20W **LED**
3W LED 3000 K Lector/ *Reader*
210lm
USB Cargador / *Charger*
Pantalla Blanca / *White shade*

USB Output

USB Output · ON/OFF Incl. · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantraco.org 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20


Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

ErP COMPLIANT · RoHS compliant · USB Output


5233 Bronce-*Bronze*
1×E27 máx. 20W **LED**
1× 3W **LED** 200lm 4000K

5240 Pantalla-*Shade*






Doble interruptor/Double switch



5234 Niquel Satinado-*Satin Nickel*
1×E27 máx. 20W **LED**
1× 3W **LED** 200lm 4000K

5237 Pantalla-*Shade*





*Seleccionar referencia producto + referencia pantalla / *Select product reference + shade reference*


NOT INCLUDED · ON/OFF Incl. · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenga 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Acero-*Steel* 220-240V~ 50/60Hz CRI:≥ 80

5235 Bronce-*Bronze*
1×E27 máx. 20W **LED**
100-240V~ 50/60Hz

5238 Pantalla-*Shade*






5236 Niquel Satin-*Satin Nickel*
1×E27 máx. 20W **LED**
100-240V~ 50/60Hz

5239 Pantalla-*Shade*




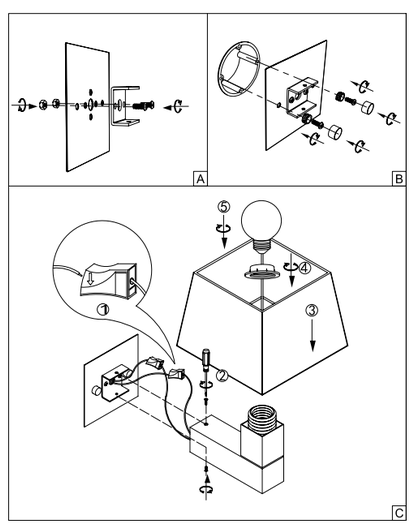



5236 Niquel Satin-*Satin Nickel*
1×E27 máx. 20W **LED**
100-240V~ 50/60Hz

5239 Pantalla-*Shade*
5170 *Plaque kit*









Ref. Kit placa / Ref. plaque kitw	5171
Aplicación/Product	5235-5233
Color	Bronce / Bronze
Material	Metálico/Metal
Dimensiones/Dimensions (mm)	L100*H100

Ref. Kit placa / Ref. plaque kit	5170
Aplicación/Product	5236-5234
Color	Niquel satinado / Santin nickel
Material	Metálico/Metal
Dimensiones/Dimensions (mm)	L100*H100

HABANA

5316 Blanco Cromo-*White Chrome*
1×E27 máx. 20W **LED**
1× 3W LED 200lm 4000K

5237 Pantalla-*Shade*




5317 Negro Cromo-*Black Chromel*
1×E27 máx. 20W **LED**
1× 3W LED 200lm 4000K

5238 Pantalla-*Shade*





Doble interruptor/*Double switch*



*Seleccionar referencia producto + referencia pantalla / *Select product reference + shade reference*

NOT INCLUDED · ON/OFF Incl. · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenga otro 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Metal-*Metal* 220-240V~ 50/60Hz CRI:≥ 80

HABANA

Santolaria & Lluscà


RoHS compliant


PANTALLAS PARA APLIQUE / SHADES FOR WALL LAMP

Ref. Pantallas / Ref. Shade	**5237**	**5238**
Aplicación/Product	Aplique/Wall lamp	Aplique/Wall lamp
Color	Blanco/White	Negro/Black
Material	Tela de fibra/Fiber cloth	Tela de fibra/Fiber cloth
Dimensiones/Dimensions (mm)	Ø200*H150	Ø200*H150












PANTALLAS PARA APLIQUE / SHADES FOR WALL LAMP

Ref. Pantallas / Ref. Shade	**5239**	**5240**
Aplicación/Product	Aplique/Wall lamp	Aplique/Wall lamp
Color	Blanco/White	Negro/Black
Material	Tela de fibra/Fiber cloth	Tela de fibra/Fiber cloth
Dimensiones/Dimensions (mm)	L200*H150*W200	L200*H150*W200

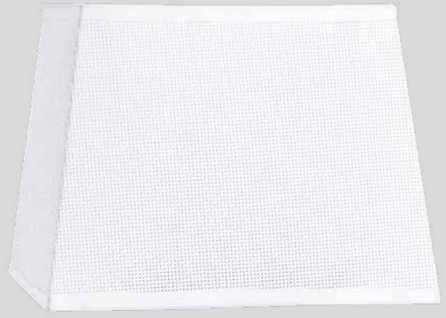



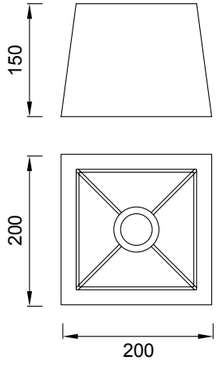

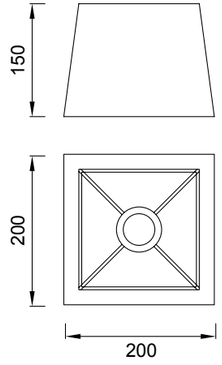

BORA BORA

6W

C0101 Blanco-*White*
LED 6W **3000k** 540lm

C0111 Plata-*Silver*
LED 6W **3000k** 540lm




C0119 Negro-*Black*
LED 6W **3000k** 540lm



C0127 Blanco-*White*
LED 6W **2700k** 420lm

C0131 Negro-*Black*
LED 6W **2700k** 420lm





12W

C0102 Blanco-*White*
LED 12W **3000k** 1080lm

C0112 Plata-*Silver*
LED 12W **3000k** 1080lm




C0120 Negro-*Black*
LED 12W **3000k** 1080lm



C0128 Blanco-*White*
LED 12W **2700k** 840lm


C0132 Negro-*Black*
LED 12W **2700k** 840lm







Aluminio-*Aluminium* 220-240V 50/60Hz CRI:≥ 80

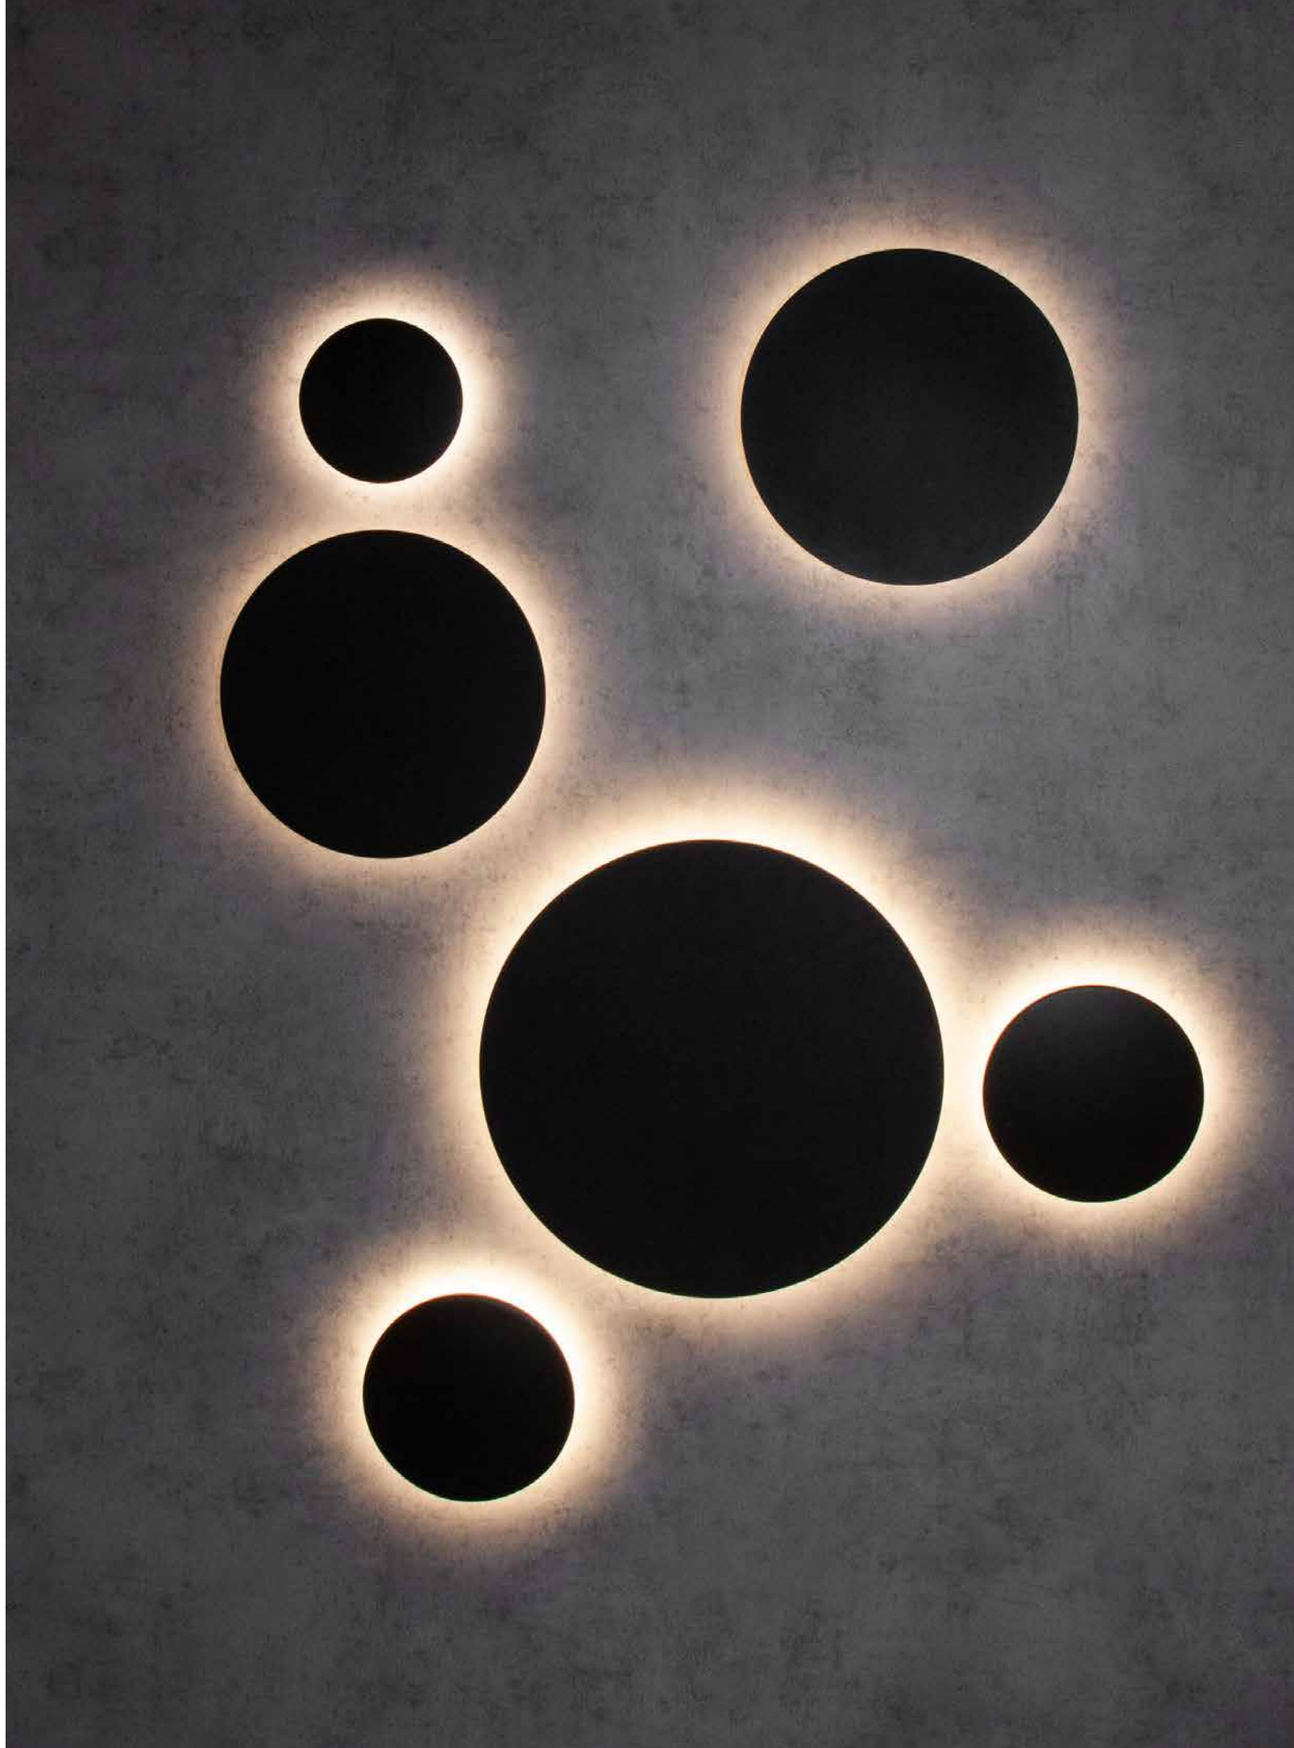

BORA BORA

16W

C0117 Blanco-*White*
LED 16W **3000k** 1350lm

C0118 Plata-*Silver*
LED 16W **3000k** 1350lm




C0124 Negro-*Black*
LED 16W **3000k** 1350lm




C0129 Blanco-*White*
LED 16W **2700k** 1120lm

C0133 Negro-*Black*
LED 16W **2700k** 1120lm










Aluminio-*Aluminium* 220-240V 50/60Hz CRI:≥ 80

30W


C0125 Blanco-*White*
LED 30W **3000k** 2400lm


C0126 Negro-*Black*
LED 30W **3000k** 2400lm



C0130 Blanco-*White*
LED 30W **2700k** 2100lm

C0134 Negro-*Black*
LED 30W **2700k** 2100lm









Aluminio-*Aluminium* 220-240V 50/60Hz CRI:≥ 80

BORA BORA

3000K





C0103 Blanco-*White*
LED 6W 540lm

C0113 Plata-*Silver*
LED 6W 540lm

C0114 Plata-*Silver*
LED 12W 1080lm

C0104 Blanco-*White*
LED 12W 1080lm







Aluminio-*Aluminium* 100-240V~ 50/60Hz CRI:≥ 80


BORA BORA




MURAL


3000K


6230 Blanco Mate-*Matt White*
LED 24W 1440lm

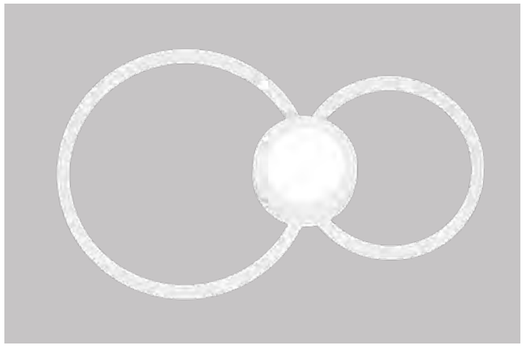

7460 Negro-*Black*
LED 24W 1440lm

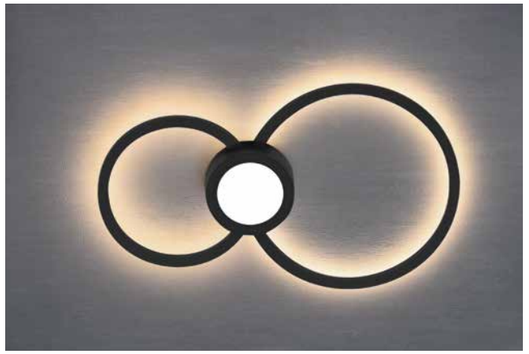

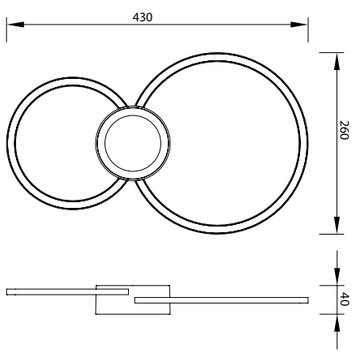

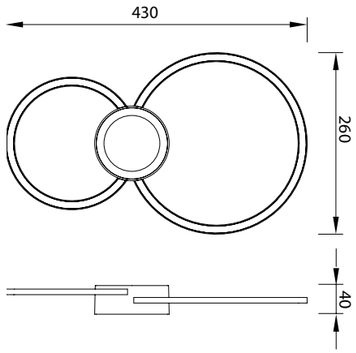

LED life / LED vida 30.000 h
ON / OFF 30.000
garantía mantraco.com 5 años WARRANTY GARANTIA LED
LED INCLUDED
IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz CRI:≥ 80




TAHITI

3000K



C0089 Blanco Mate-*MattWhite*

LED 6W 215lm

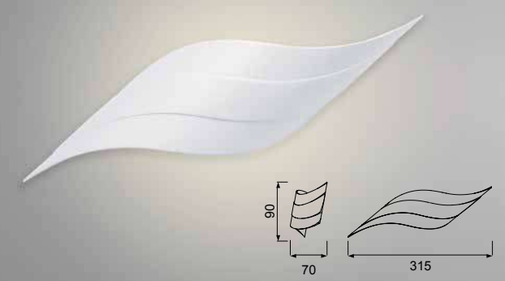

ErP COMPLIANT · DRIVER TÜV · RoHS compliant · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80


Aplique-*Wall light*

TAHITI

3000K


C0142 Blanco Mate-*MattWhite*

LED 5W 325lm

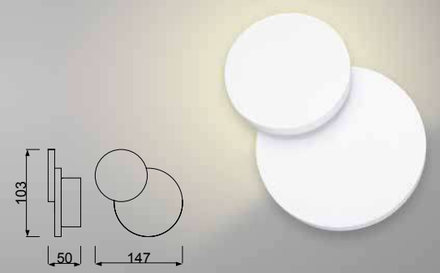


C0141 Blanco Mate-*MattWhite*

LED 5W 325lm

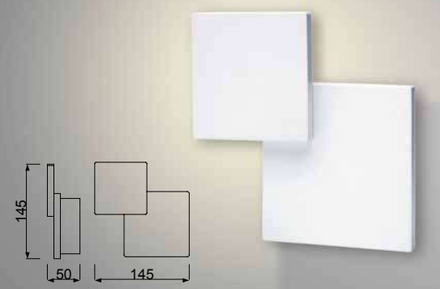

C0143 Blanco Mate-*MattWhite*

LED 5W 325lm

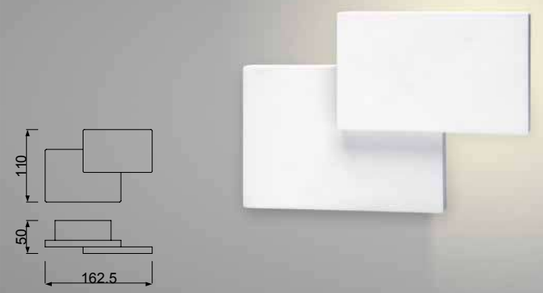

ErP COMPLIANT · DRIVER TÜV · RoHS compliant · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20


Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

Aplique-*Wall light*

6254 Blanco-White
16W 1410lm 3000 K


5121 Blanco-White
16W 1410lm 4000 K






6253 Blanco-White
8W 720lm 3000 K

5120 Blanco-White
8W 720lm 4000 K

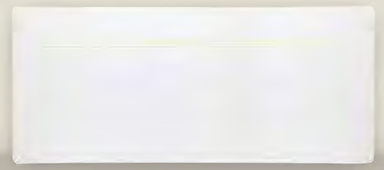







5120



Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

ErP COMPLIANT
DRIVER TÜV
RoHS compliant

MINI


Aplique-*Wall light*

by Hugo Tejada






5480 Blanco-*White*
2 L×G9



5481 Blanco-*White*
2 L×G9





6168
pág. 116

NOT INCLUDED

garantía mantraco.com 2 AÑOS YEARS WARRANTY GARANTÍA

IP44

Metal/Acrílico-Metal/Acrylic 100-240V ~ 50/60Hz máx. 5W LED

IP44

0AMI 003390038-0005 / 0006

MINI

ErP COMPLIANT


RoHS compliant

PARACURU

3000 K




6385 Cuero-*Antique Brass*
LED 18W 1257lm

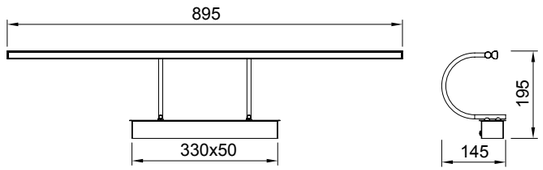




6383 Cuero-*Antique Brass*
LED 12W 908lm

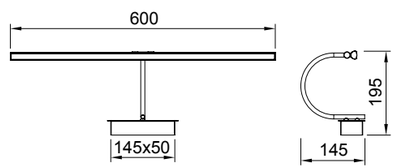



6382 Cuero-Antique *Brass*
LED 8W 619lm

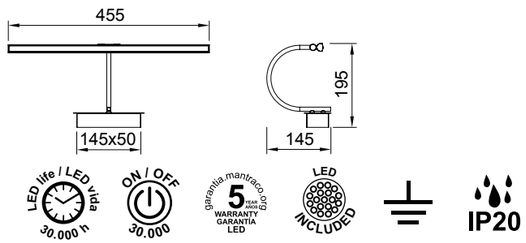

Aluminio-Aluminium 175-265V~ 50/60Hz



KUBICK
3000K

7760 Blanco Mate-*Matt White*
LED 48W 2700lm


7761 Blanco Mate-*Matt White*
LED 48W 2700lm
Dimmable

7762 Negro Mate-*Matt Black*
LED 48W 2700lm

7763 Negro Mate-*Matt Black*
LED 48W 2700lm
Dimmable





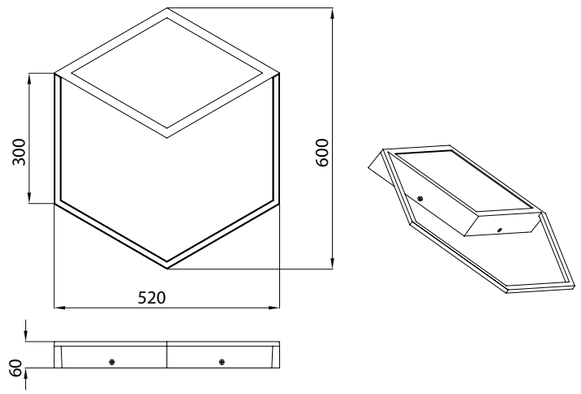

7592
pág. 28

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

TORCH

3000K


360º

6827 Blanco Mate-*Matt White*
LED 36W 2850lm



6828 Negro Mate-*Matt Black*
LED 36W 2850lm



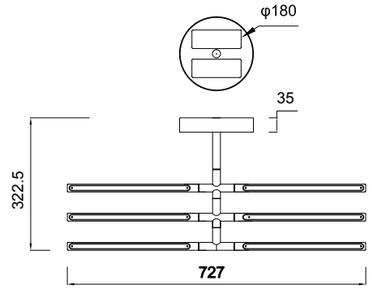



6736
pág. 152

6738
pág. 136

6826
pág. 188

6703
pág. 66


LED life / LED vida 50.000 h
ON / OFF 30.000
garantía mantracon 5 AÑOS WARRANTY GARANTIA LED
LED INCLUDED
IP20


Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

TORCH

MURAL
3000K

7463 Negro-*Black*
LED 48W 3840lm
Dimmable

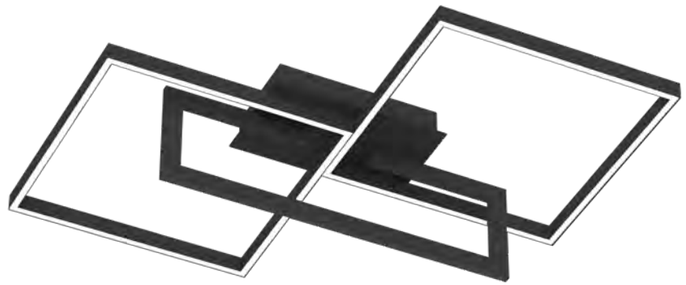



7462 Negro-*Black*
LED 48W 3840lm

6563
pág. 147



6562
pág.146

Dimmable · ON / OFF 30.000 · LED life / LED vida 20.000 h · garantía mantenga 5 YEAR WARRANTY GARANTÍA LED · LED INCLUDED · IP20


Aluminio-*Aluminium* **220-240V~ 50/60Hz** CRI:≥ 80




Plafón-*Ceiling lamp*

6560 Blanco Mate-*Matt White*
LED 48W 3000K 3840lm

6561 Blanco Mate-*Matt White*
LED 48W 3000K 3840lm
Dimmable

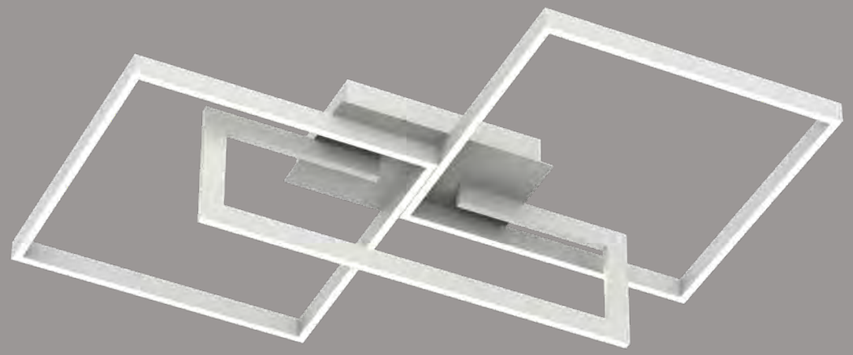






6563
pág. 147



6562
pág.146

Dimmable · LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenga.com 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

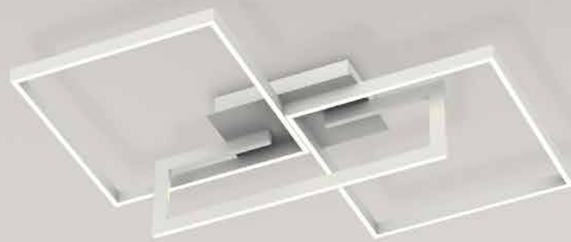



ErP COMPLIANT · DRIVER TÜV · RoHS compliant


MINI

Hugo Tejada



6166 Blanco-*White*


8 L × E27 máx. 20W LED





6168 Blanco-*White*

5 L × E27 máx. 20W LED





5480
pág. 104



NOT INCLUDED

garantía mantraco.org 2 AÑOS YEARS WARRANTY GARANTÍA

IP20

Metal/Acrílico-*Metal/Acrylic* 100-240V ~ 50/60Hz OAMI 003390038-0005 / 0006


MINI

Hugo Tejada

Plafón-*Ceiling lamp*

MINI

Hugo Tejada

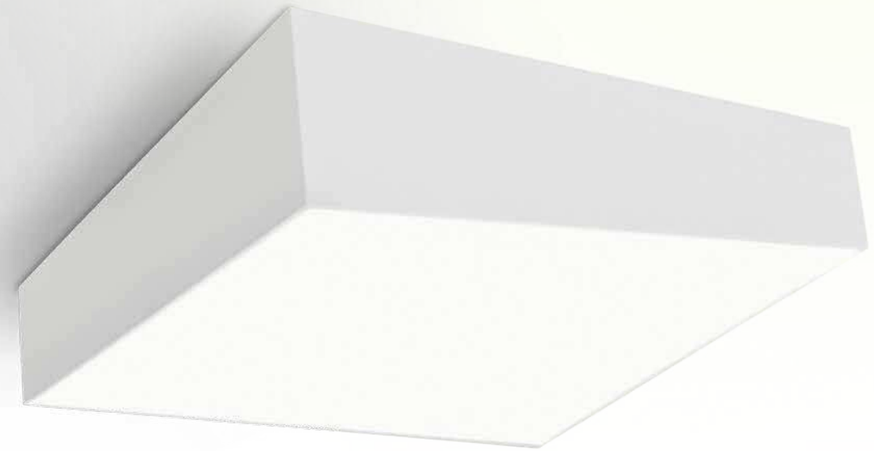

6162 Blanco-White

5 L × E27 máx. 20W LED




5481
pág. 104

NOT INCLUDED

garantía mantraco.com 2 AÑOS WARRANTY GARANTÍA

IP20

Metal/Acrílico-*Metal/Acrylic* 100-240V ~ 50/60Hz

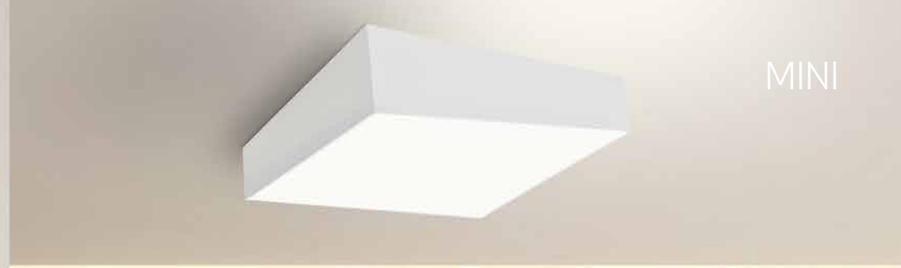




ErP COMPLIANT


RoHS compliant



5410 Blanco-*White*
5L × E27 máx. 20W LED



5411 Blanco-*White*
3L × E27 máx. 20W LED



NOT INCLUDED

garantía mantraco.es 2 YEAR ANOS WARRANTY GARANTÍA

IP20

Metal/Acrílico-Metal/Acrylic 100-240V ~ 50/60Hz




CUMBUCO

5513 Blanco-*White*
LED 80W **4200K** 6000lm

6153 Blanco-*White*
LED 80W **3000K** 5650lm






5502 Blanco-*White*
LED 35W **4200K** 2625lm

6152 Blanco-*White*
LED 35W **3000K** 2350lm







LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Metal Acrílico-*Metal Acrylic* 100-250V~ 50/60Hz CRI:≥ 80





5503 Blanco-*White*
LED 85W **4200K** 6375lm

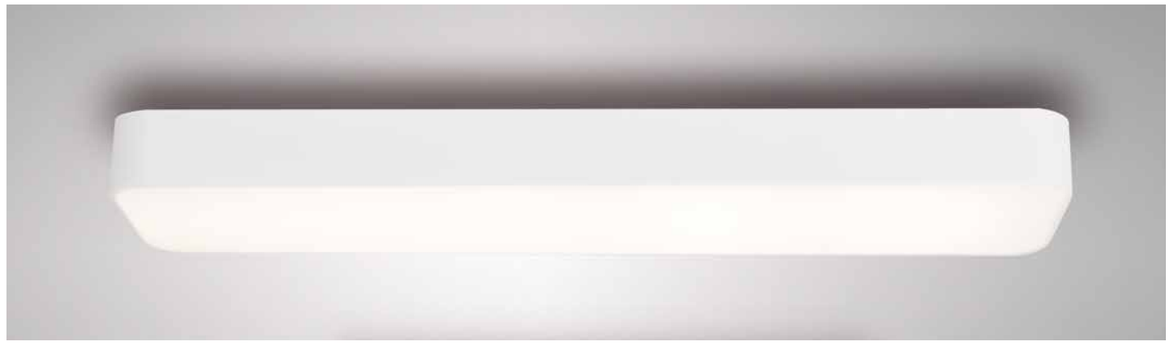

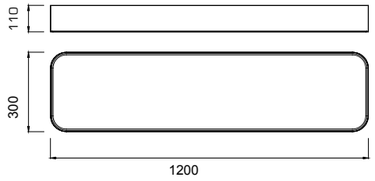

5501 Blanco-*White*
LED 50W **4200K** 3750lm

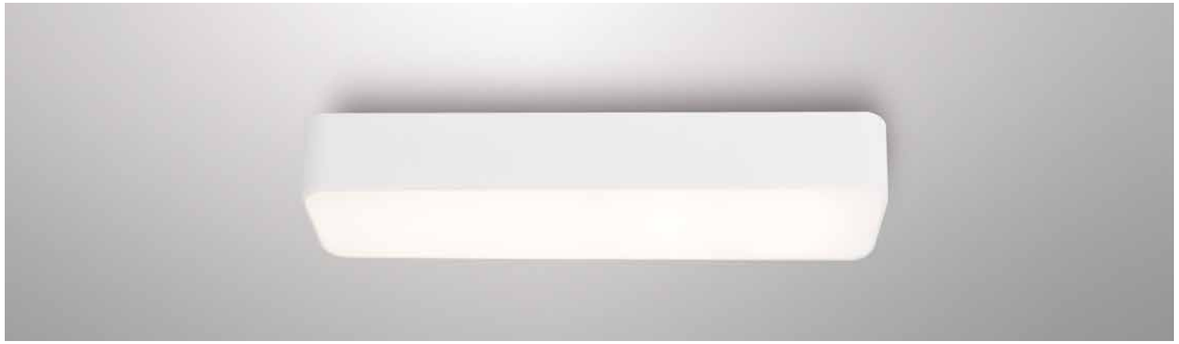





Metal Acrílico-*Metal Acrylic* 100-250V~ 50/60Hz CRI:≥ 80





5500 Blanco-*White*
LED 50W **4200K** 3750lm

5508 Blanco-*White*
LED 90W **4200K** 6750lm

6150 Blanco-*White*
LED 50W **3000K** 3500lm

6151 Blanco-*White*
LED 90W **3000K** 6400lm








Metal Acrílico-*Metal Acrylic* 100-250V~ 50/60Hz CRI:≥ 80







5503 **+ KIT 5517**

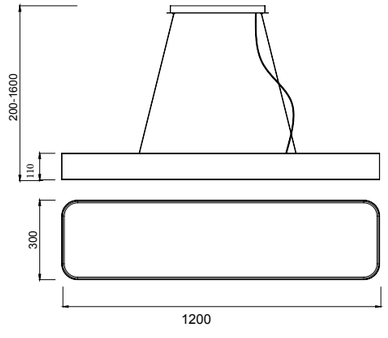


5501 **+ KIT 5517**



6151 **+ KIT 5515**




6150 **+ KIT 5515**

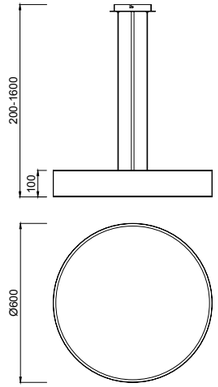







6153 **+ KIT 5516**

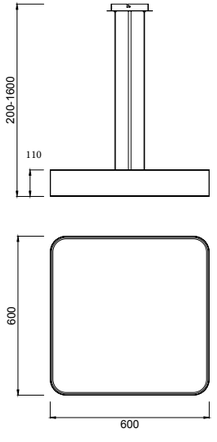

6152 **+ KIT 5516**







SAONA SUPERFICIE

6626 Blanco Mate-*Matt White*
LED 30W **3000K** 2550lm

6624 Blanco Mate-*Matt White*
LED 24W **3000K** 2040lm

6627 Blanco Mate-*Matt White*
LED 30W **4000K** 2700lm

6625 Blanco Mate-*Matt White*
LED 24W **4000K** 2160lm





6622 Blanco Mate-*Matt White*
LED 14W **3000K** 1190lm

6620 Blanco Mate-*Matt White*
LED 8W **3000K** 680lm

6623 Blanco Mate-*Matt White*
LED 14W **4000K** 1260lm

6621 Blanco Mate-*Matt White*
LED 8W **4000K** 720lm





Downlight en superficie para paredes y soluciones sin falso techo.

LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenga 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 200-240V~ 50/60Hz CRI:≥ 80



SAONA SUPERFICIE


6634 Blanco Mate-*Matt White*
LED 30W 2550lm 3000K

6635 Blanco Mate-*Mat tWhite*
LED 30W 2700lm 4000K




6632 Blanco Mate-*Matt White*
LED 24W 2040lm 3000K

6633 Blanco Mate-*Matt White*
LED 24W 2160lm 4000K

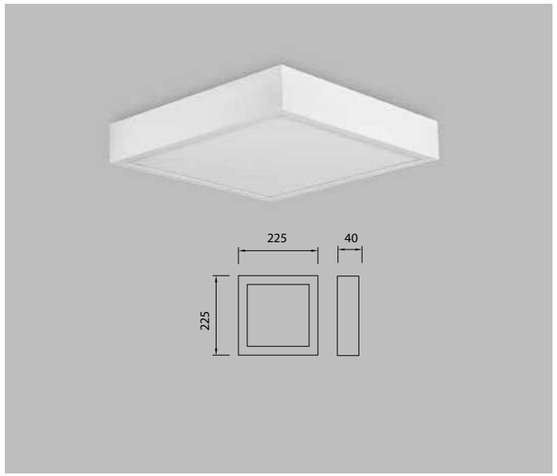


6630 Blanco Mate-*Matt White*
LED 14W 1190lm 3000K

6631 Blanco Mate-*Matt White*
LED 14W 1260lm 4000K

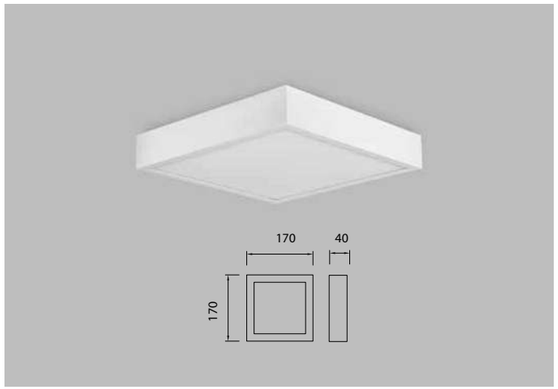

6628 Blanco Mate-*Matt White*
LED 8W 680lm 3000K

6629 Blanco Mate-*Matt White*
LED 8W 720lm 4000K

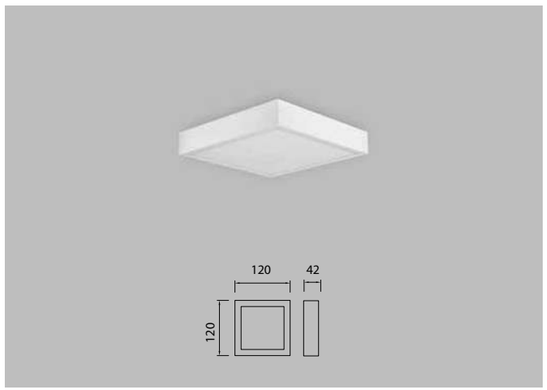

Downlight en superficie para paredes y soluciones sin falso techo.

LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 200-240V~ 50/60Hz CRI:≥ 80

SAONA SUPERFICIE



ErP COMPLIANT · DRIVER TÜV · RoHS compliant

EYES

3000K

7510 Negro arena-*Sand black*
LED 6W **3000K** 390lm



7511 Negro arena-*Sand black*
LED 6W **3000K** 390lm







Aluminio-*Aluminium* **100-240V~ 50/60Hz** CRI:≥ 80



SAL

7521 Blanco arena-*Sand white*
1 × **GU10** (No incl)

7520 Blanco arena-*Sand white*
1 × **GU10** (No incl)

7516 Negro mate-*Matt black*
1 × **GU10** (No incl)

7515 Negro mate-*Matt black*
1 × **GU10** (No incl)



6284
pág. 70
6283
pág. 70
6281
pág. 196
6282
pág. 196

NOT INCLUDED · ON/OFF · garantía mantenida 2 YEARS WARRANTY GARANTÍA · IP20

Acrílico-Acrylic 100-240V~ 50/60Hz GU10 máx. 10W Led (No incl)




TORCH


360º


6738 Negro Mate-*Matt Black*
LED 11W 3000K 900lm



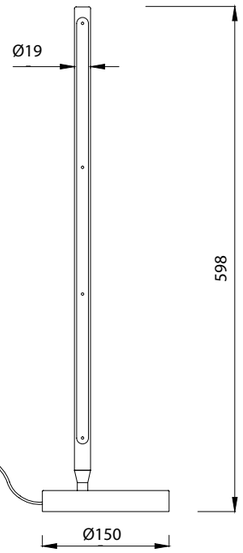


6737 Blanco Mate-*Matt White*
LED 11W 3000K 900lm

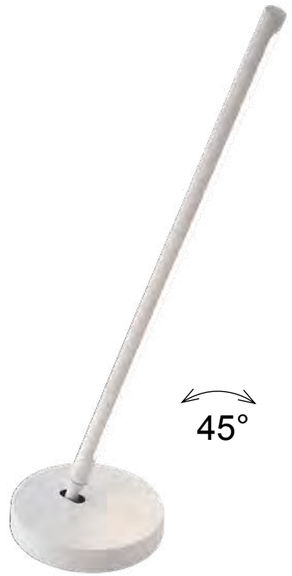

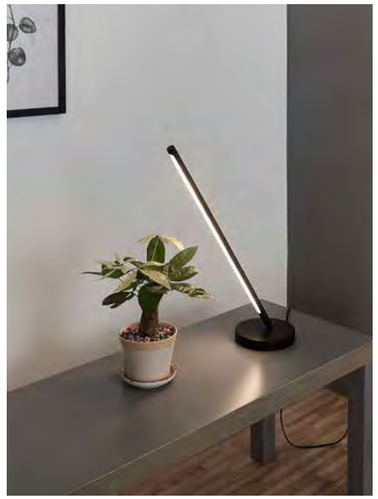



6736
pág. 152



6826
pág. 188



6703
pág. 66



6828
pág. 110















Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80



ZANZIBAR


3000K

6716 Negro -*Black*
LED 6W 450 lm



Touch
switch
3 Step-Dim

* Cargador De Inducción Teléfono-*Cell Phone Induction Charger*

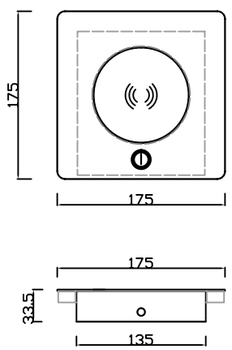



6754
pág. 56



LED 6W 450 lm

ON/OFF
LED life / LED vida 20.000 h
ON / OFF 30.000
garantía mantenimiento 5 AÑOS YEARS WARRANTY GARANTIA LED
LED INCLUDED
IP20


Aluminio/Metal-*Aluminium/Metal* 220-240V~ 50/60Hz CRI:≥ 80

ZANZIBAR

3000K

6715 Blanco-*White*
LED 6W 450 lm



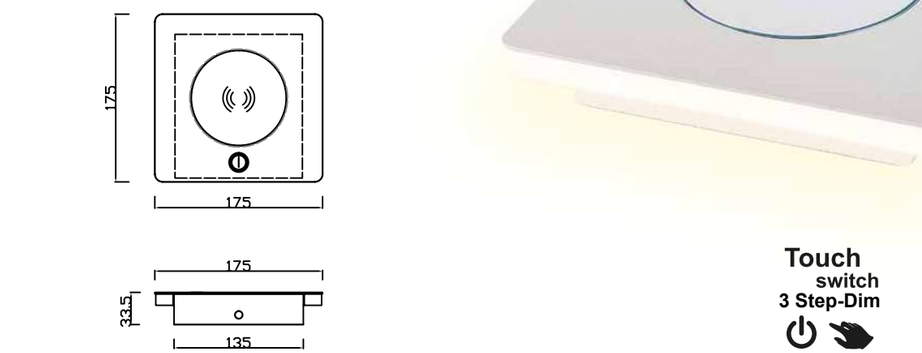

Touch
switch
3 Step-Dim

* Cargador De Inducción Teléfono-*Cell Phone Induction Charger*



CERES

Sobremesa Cargador De Inducción Telefónica-*Table Lamp Cell Phone Induction Charger*

by Hugo Tejada

7290 Blanco-*White*
LED 6W 450lm








USB Output

Touch switch 3 Step-Dim

USB + Cargador de Inducción
USB + Induction Charger

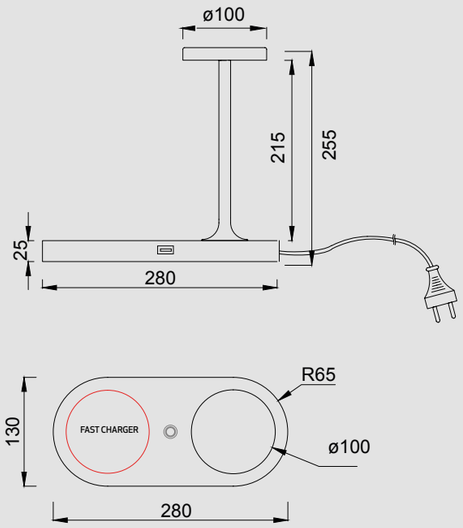

ON/OFF · Touch switch 3 Step-Dim · USB Output · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenida 5 YEAR WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 80



DRIVER TÜV


Registered Nº 007663331-0011

Sobremesa Cargador De Inducción Telefónica-*Table Lamp Cell Phone Induction Charger*

CERES


7291 Negro-Black
LED 6W 450lm



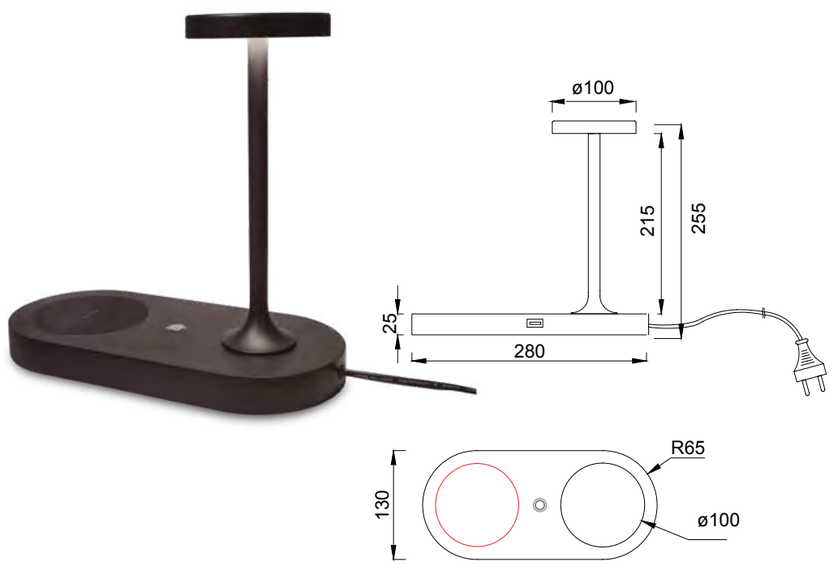




CERES
3000K

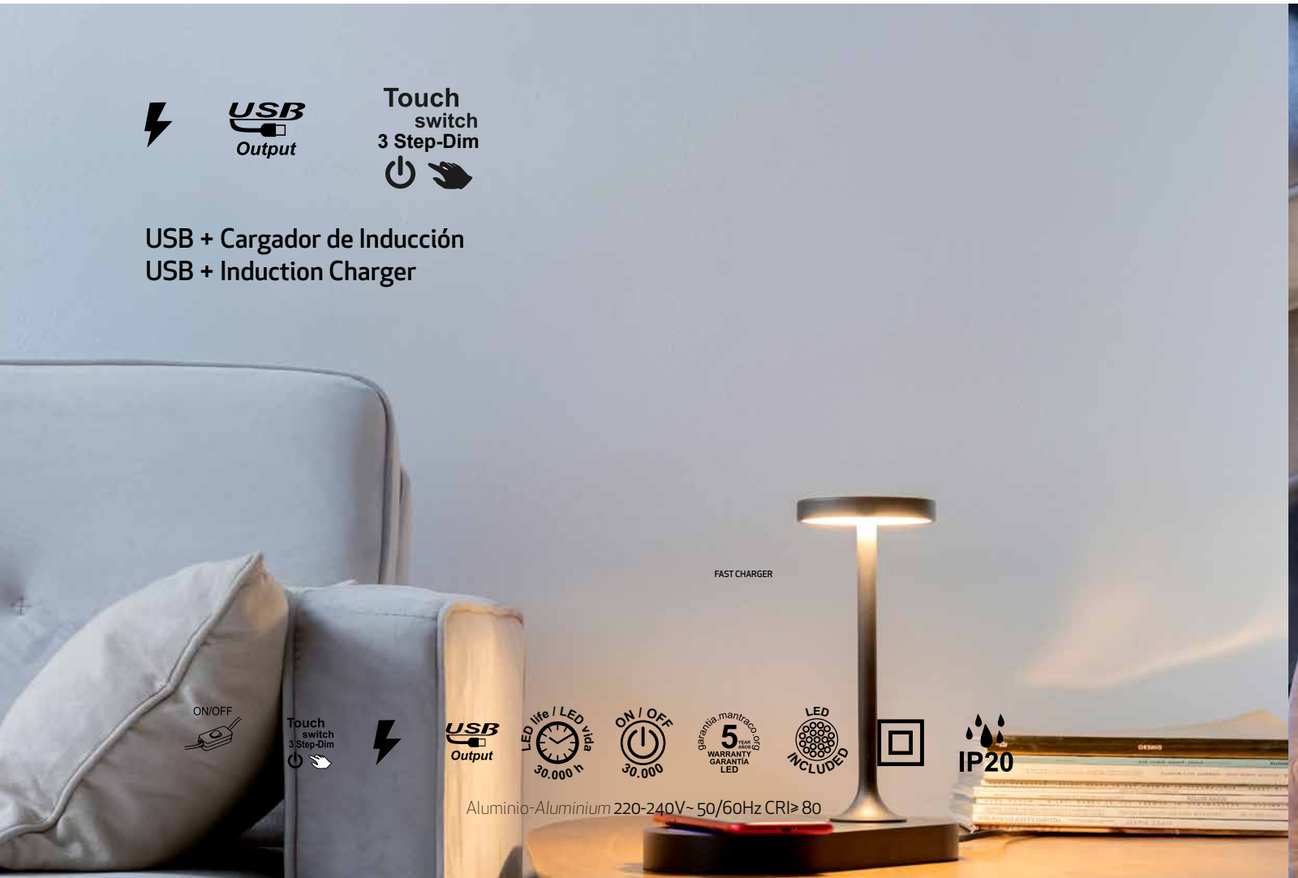



MURAL 3000K

7464 Negro-*Black*
LED 18W **3000K** 1380 lm

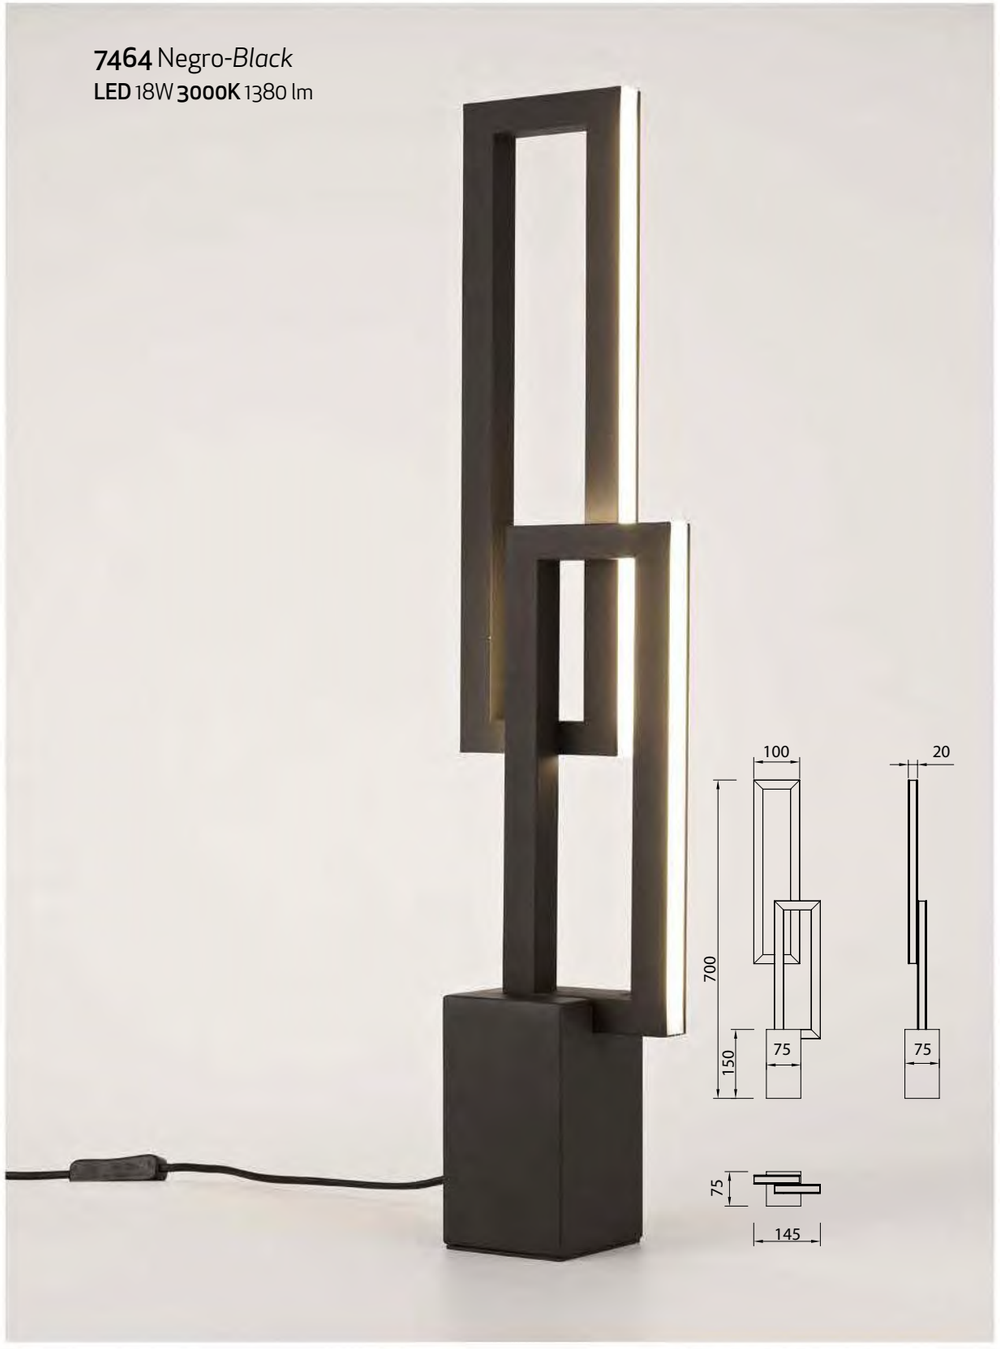


ON/OFF · ON / OFF 30.000 · LED life / LED vida 20.000 h · garantia.mantraco.org 5 YEAR WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* **220-240V 50/60Hz** CRI:≥ 80

MURAL 3000K

7465 Negro-*Black*
LED 48W **3000K** 3800 lm
Dimmable



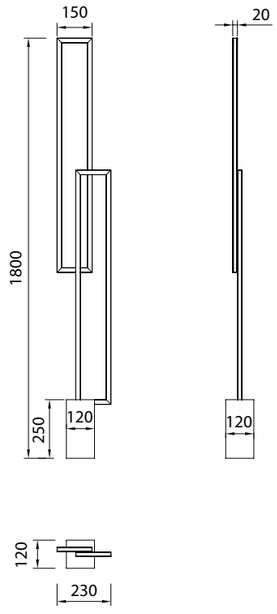



6560/6561
pág. 114





ON/OFF DIMMER · ON / OFF 30.000 · LED life / LED vida 20.000 h · garantia.mantraco.org 5 YEAR WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Sobremesa-*Table lamp*

6562 Blanco-*White*
LED 18W **3000K** 1380 lm



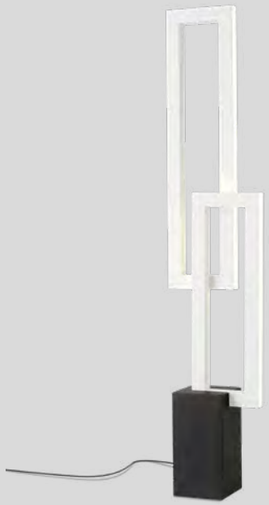

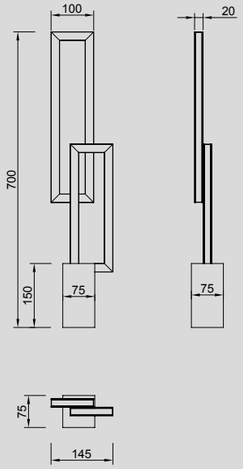




6560/6561
pág. 114


ON/OFF · LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenga 5 WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminium/Iron/Acrílico-*Aluminium/Iron/Acrylic* 220-240V~ 50/60Hz CRI:≥ 80

6563 Blanco-*White*
LED 48W **3000K** 3800 lm
Dimmable



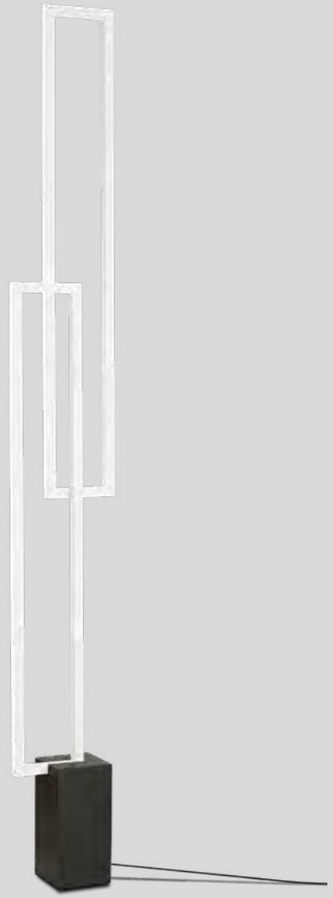

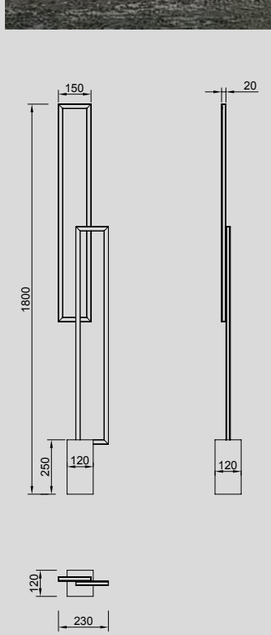

ON/OFF DIMMER · LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenga 5 WARRANTY GARANTIA LED · LED INCLUDED · IP20


Aluminium/Iron/Acrílico-*Aluminium/Iron/Acrylic* 220-240V~ 50/60Hz CRI:≥ 80


Pie de Salón-*Floor lamp*

7522 Blanco arena-*Sand white*
1 × **GU10** (No incl)

7517 Negro mate-*Matt black*
1 × **GU10** (No incl)





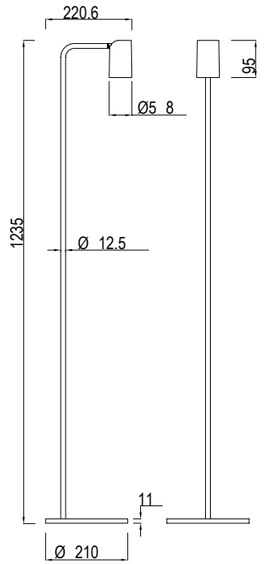





6284
pág. 70



6281
pág. 196

NOT INCLUDED

ON/OFF

garantía mantenimiento 2 AÑOS WARRANTY GARANTÍA

IP20

Acrílico-Acrylic 100-240V~ 50/60Hz GU10 máx. 10W Led (No incl)




Pie de Salón-*Floor lamp*

7512 Negro arena-*Sand black*
LED 6W **3000K** 390lm





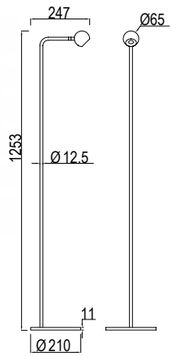



Aluminio-*Aluminium* **100-240V~ 50/60Hz** CRI:≥ 80



TORCH


Pie de Salón-*Floor lamp*

360º

6735 Blanco Mate-*Matt White*
LED 25W 3000K 1950lm

6736 Negro Mate-*Matt Black*
LED 25W 3000K 1950lm




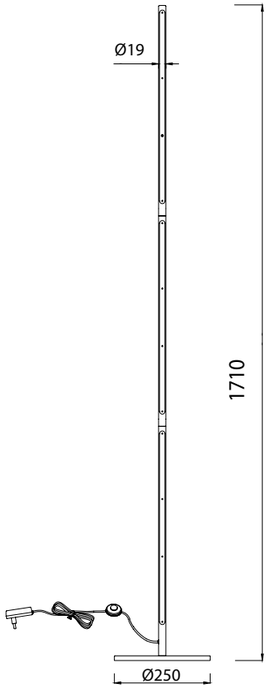





6738
pág. 136



6826
pág. 188



6703
pág. 66



6828
pág. 110















Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

HANOK

by David Villalba

7546 Negro-*Black*
LED 38W **3000K** 2850lm

7547 Negro-*Black*
LED 38W **4000K** 3000lm


7542 Blanco-*White*
LED 38W **3000K** 2850lm

7543 Blanco-*White*
LED 38W **4000K** 3000lm







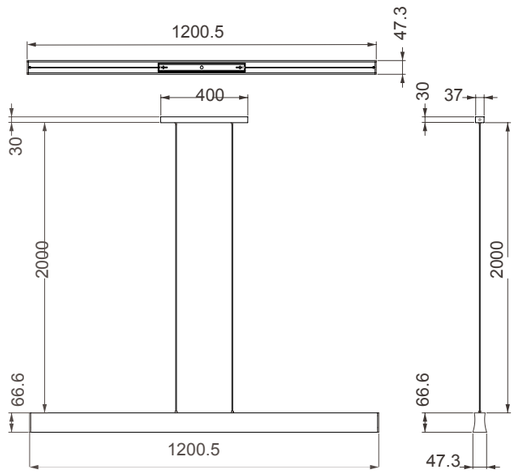



7776
pág. 16















Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80

Lámpara lineal-*Linear lamp*

HANOK

7540 Blanco-*White*
LED 38W **3000K** 2650lm

7541 Blanco-*White*
LED 38W **4000K** 2800lm

7544 Negro-*Black*
LED 38W **3000K** 2650lm


7545 Negro-*Black*
LED 38W **4000K** 2800lm

50°

UGR<16





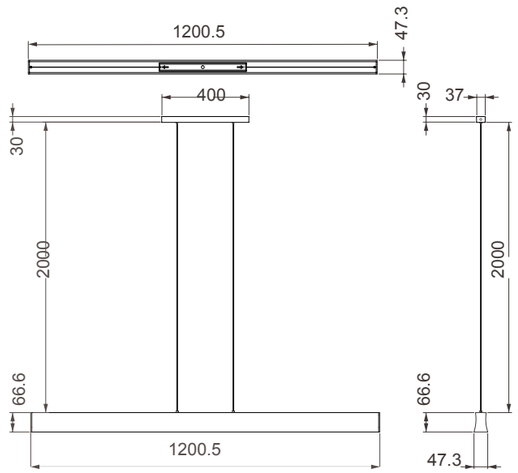



UGR<16 · 50° · LED life / LED Vida 50.000 h · ON / OFF 30.000 · garantía mantracc.org 5 años WARRANTY GARANTIA LED · LED INCLUDED

7776
pág. 16

Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80 UGR<16


Lámpara lineal-*Linear lamp*

HANOK

110°

7569 Arena-*Sabbia*
LED 38W **3000K** 2850lm



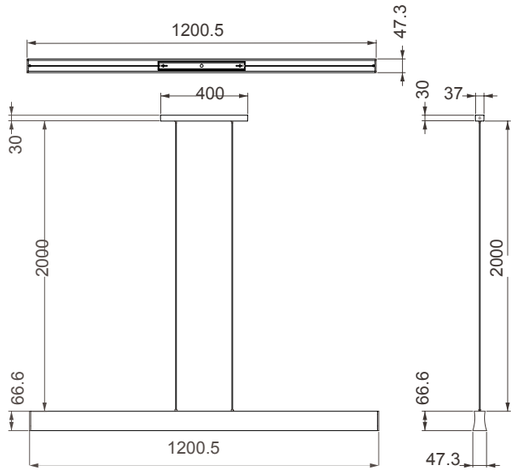





110°
LED life / LED vida 50.000 h
ON / OFF 30.000
garantía mantenimiento 5 AÑOS WARRANTY GARANTIA LED
LED INCLUDED
IP20

Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI: ≥ 80


HANOK

7548 Blanco-*White*
LED 38W **3000K** 2650lm


7549 Blanco-*White*
LED 38W **4000K** 2800lm




UGR<16

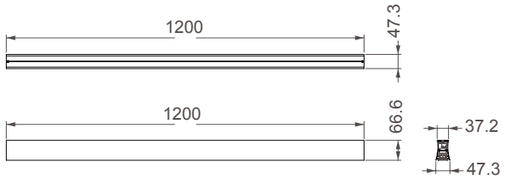


7550 Tapa lateral con cable fijación
Side cover white with fixing wire

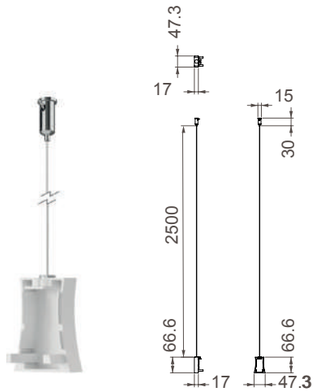


7551 Tapa lateral con cable alimentación y florón
Side cover white with ac wire & rosette

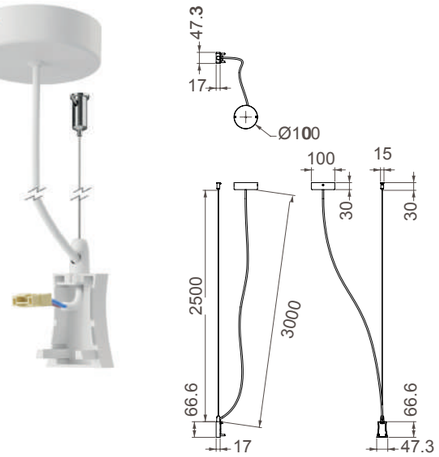

7552 Conexión intermedia con cable fijación
Middle connection white with fixing wire

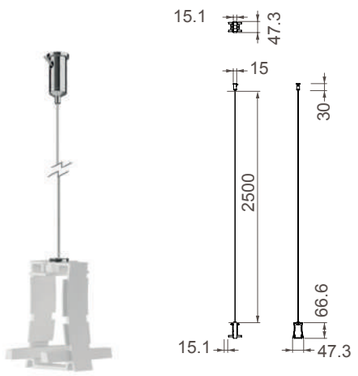

7553 Conexión intermedia con cable alimentación y florón
Middle connection white with ac wire & rosette

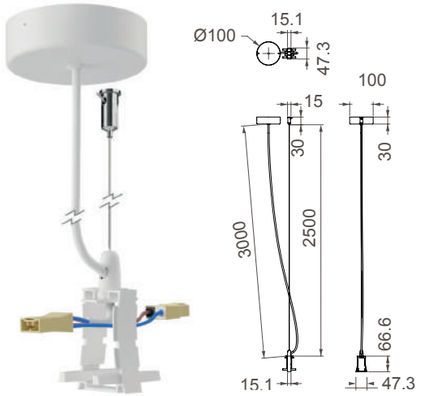

UGR<16 | 50° | LED life / LED Vida 50.000 h | ON / OFF 30.000 | garantía mantraco.org 5 años WARRANTY GARANTIA LED | LED INCLUDED | IP20

Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80 UGR<16

HANOK

Módulo lineal-*Linear Module*




UGR<16




7554 Negro-*Black*
LED 38W **3000K** 2650lm

7555 Negro-*Black*
LED 38W **4000K** 2800lm

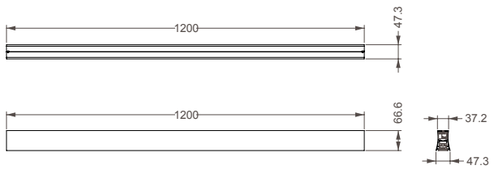


7556 Tapa lateral con cable fijación
Side cover white with fixing wire

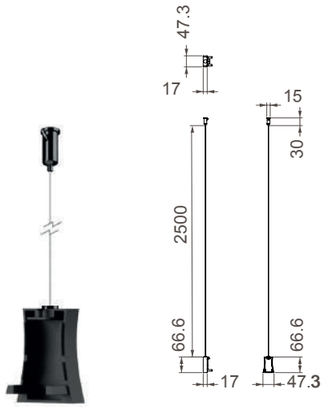


7557 Tapa lateral con cable alimentación y florón
Side cover white with ac wire & rosette



7558 Conexión intermedia con cable fijación
Middle connection white with fixing wire

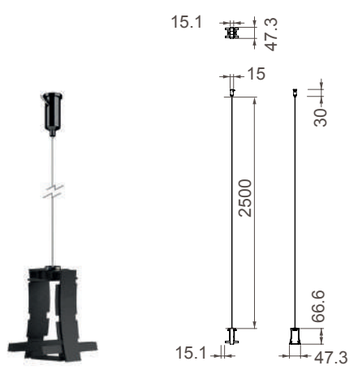

7559 Conexión intermedia con cable alimentación y florón
Middle connection white with ac wire & rosette

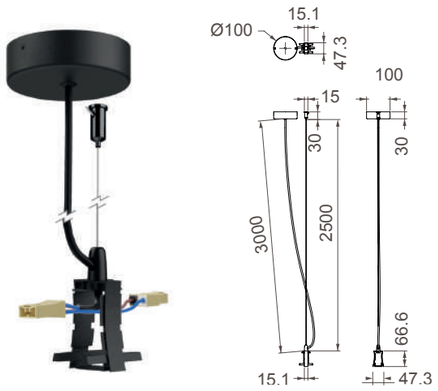

UGR<16 | 50° | LED life / LED vida 50.000 h | ON / OFF 30.000 | garantía mantracc.org 5 años WARRANTY GARANTIA LED | LED INCLUDED | IP20

Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80 UGR<16

PAGODA

by David Villalba

CRI≥90 UGR<16



7784 Blanco-*White*
LED 12,5W **3000K** 950lm

7785 Blanco-*White*
LED 12,5W **4000K** 1050lm






7786 Negro-*Black*
LED 12,5W **3000K** 950lm

7787 Negro-*Black*
LED 12,5W **4000K** 1050lm






7788
pág. 214







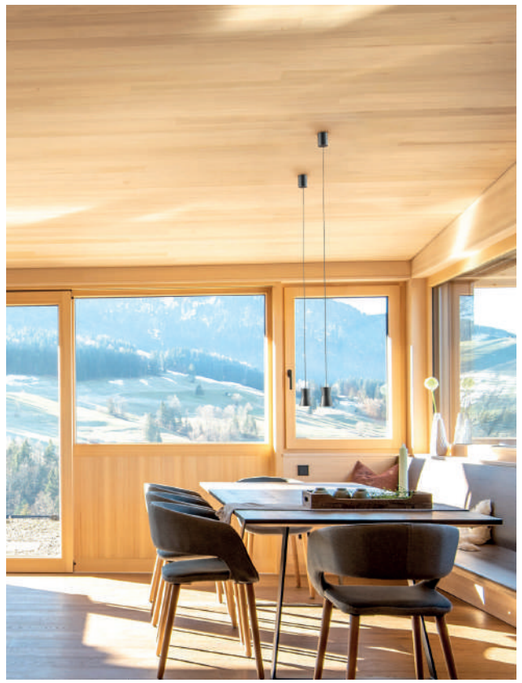

TIR LENS · 38° · UGR<16 · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantia.mantraco.org 5 YEAR WARRANTY GARANTIA LED · LED INCLUDED · IP20


Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 90

PAGODA



7790 Blanco-*White*
1× **GU10** (no incl)



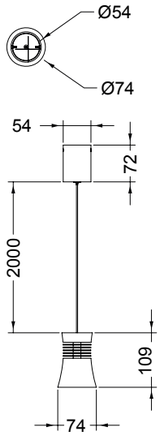



7791 Negro-*Black*
1× **GU10** (no incl)









7788
pág. 214

NOT INCLUDED

garantía mantenimiento 2 AÑOS WARRANTY GARANTÍA

IP20

Aluminio-*Aluminium* 100-240V ~ 50/60Hz GU10 máx. 12W LED (no incl)




ORION
3000K

Designed by Hugo Tejada



7475 Negro/cuero-*Black/antique brass*
LED 24W 1770 lm




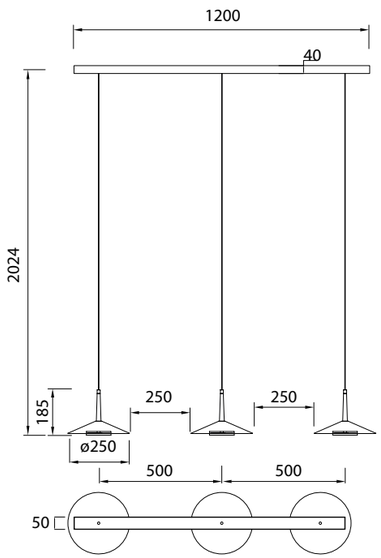

LED life / LED vida 30.000 h · ON / OFF 30.000 · LED INCLUDED · garantia mantrano.org 5 YEAR ANOS WARRANTY GARANTIA LED · IP20 · DRIVER TÜV

Aluminio/Acrílico-*Aluminium/Acrylic* **220-240V~ 50/60Hz** CRI≥ 80



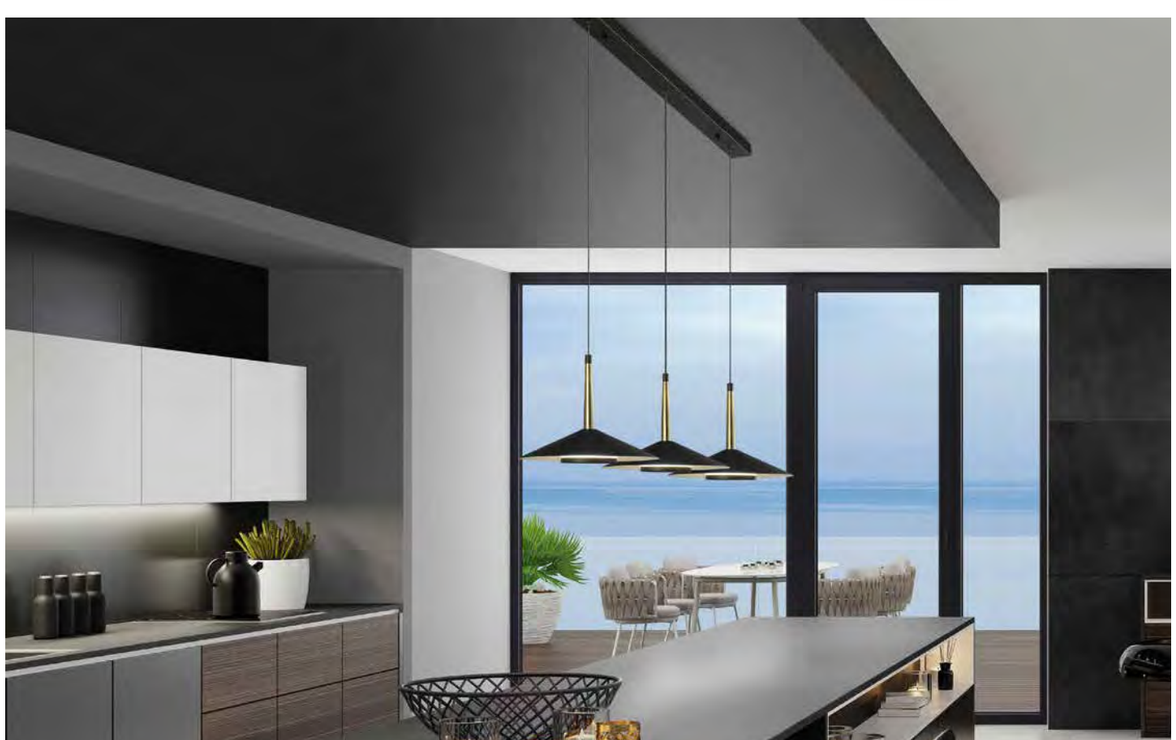

ORION
3000K

7476 Negro/cuero-*Black/antique brass*
LED 32W 2360 lm






LED life / LED vida 30.000 h
ON / OFF 30.000
LED INCLUDED
garantia.mantraco.org 5 YEAR AÑOS WARRANTY GARANTIA LED
IP20
DRIVER TÜV

Aluminio/Acrílico-*Aluminium/Acrylic* **220-240V~50/60Hz** CRI≥ 80


ORION
3000K

7305 Negro +Cuero-*Black +Antique brass*
LED 8W 590lm

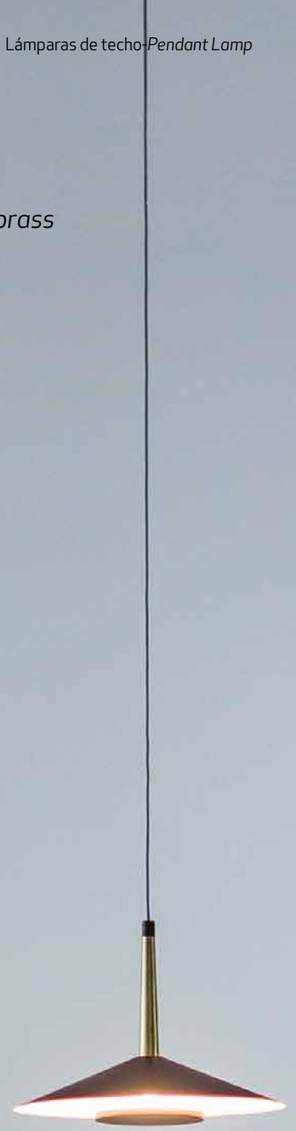





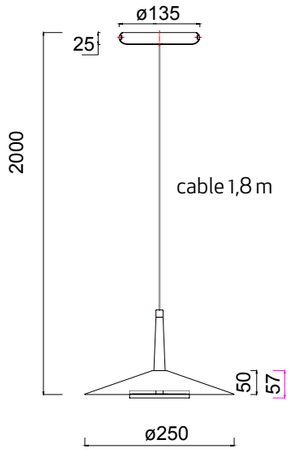




LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 80

ORION
3000K



7306 Negro+Cuero-*Black+Antique brass*
LED 16W 1180lm
6 und x ref 7308 included

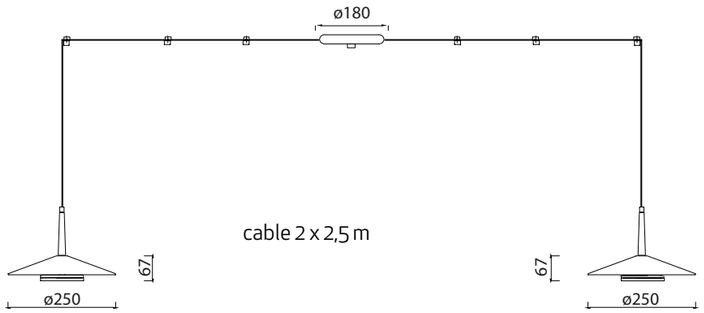



7308 *Blocacables-WireLocker*
1 und

LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 80

DRIVER
TÜV


Registered Nº 007663331-0014


ORION
3000K

7307 Negro +Cuero-*Black +Antique brass*
LED 32W 2360lm
12 und x ref 7308 included



7308 *Blocacables-WireLocker*
1 und

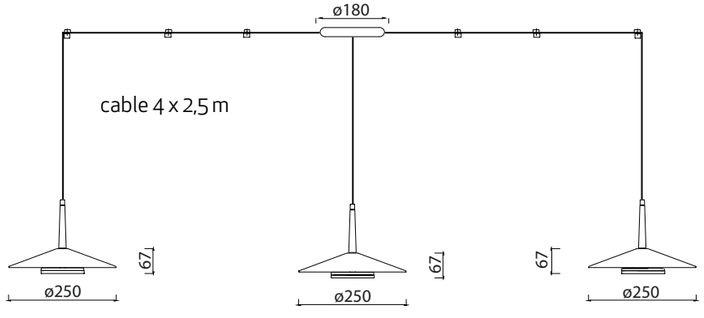



LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 80 Registered Nº 007663331-0014






ANTARES
3000K

Designed by Hugo Tejada

7312 Negro-Black
LED 24W 1770lm





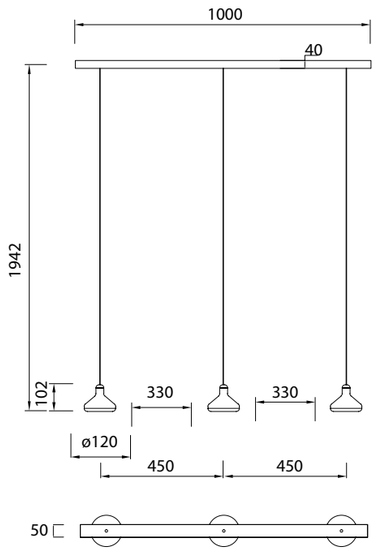




Aluminio/Acrílico-*Aluminium/Acrylic* **220-240V~ 50/60Hz** CRI⩾80





ANTARES
3000K

7313 Negro-Black
LED 32W 2360lm

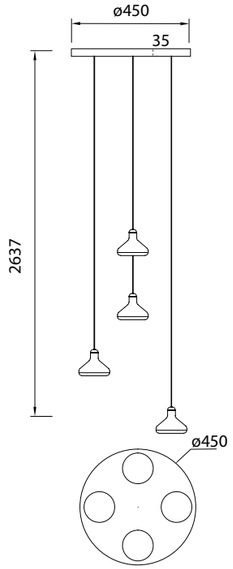




LED life / LED vida 30.000 h · ON / OFF 30.000 · LED INCLUDED · garantia mantraco.org 5 YEAR WARRANTY GARANTIA LED · IP20 · DRIVER TÜV

Aluminio/Acrílico-*Aluminium/Acrylic* **220-240V~ 50/60Hz** CRI≥ 80

ANTARES
3000K

7310 Negro-Black
LED 8W 590lm



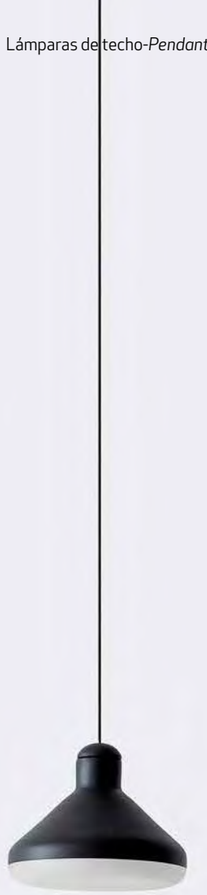


cable 1,8 m











Aluminio/Acrílico-*Aluminium*/Acrylic 220-240V~ 50/60Hz CRI≥ 80

DRIVER
TÜV

Registered **Nº 007663331-0010**


ANTARES
3000K

7311 Negro-Black
LED 24W 1770lm





cables 6 x 1,8 m

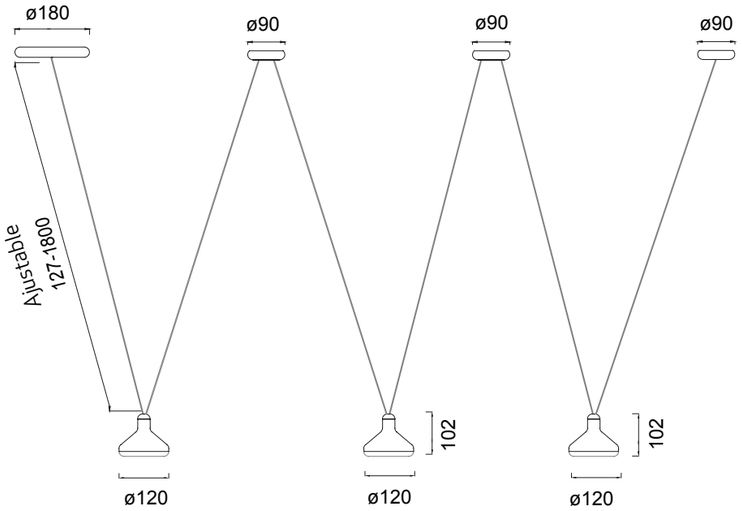



Aluminio/Acrílico-*Aluminium*/Acrylic 220-240V~ 50/60Hz CRI≥ 80





DRIVER
TÜV

ANTARES
3000K

ANTARES
3000K

Registered **Nº 007663331-0010**

DRIVER
TÜV

TORCH


3000K

6825 Blanco Mate-*Matt White*
LED 21W 1475lm



6826 Negro Mate-*Matt Black*
LED 21W 1475lm



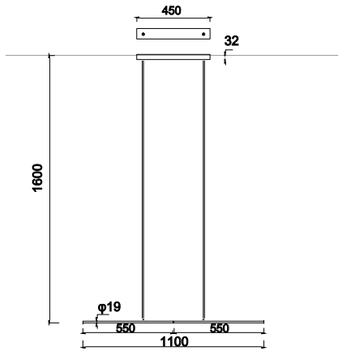



6736
pág. 152



6738
pág. 136



6703
pág. 66



6828
pág. 110



Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 80



ErP COMPLIANT RoHS compliant

Colgante-*Pendant lamp*




5622 Blanco mate-*Matt White*
1L × E27





5623 Blanco mate-*Matt White*
1L × E27



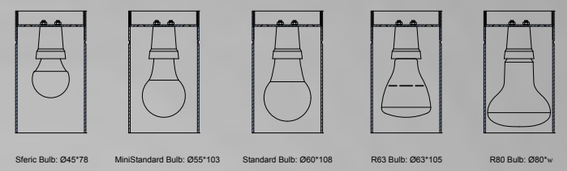


5624 Plata-*Silver*
1L × E27






5625 Plata-*Silver*
1L × E27

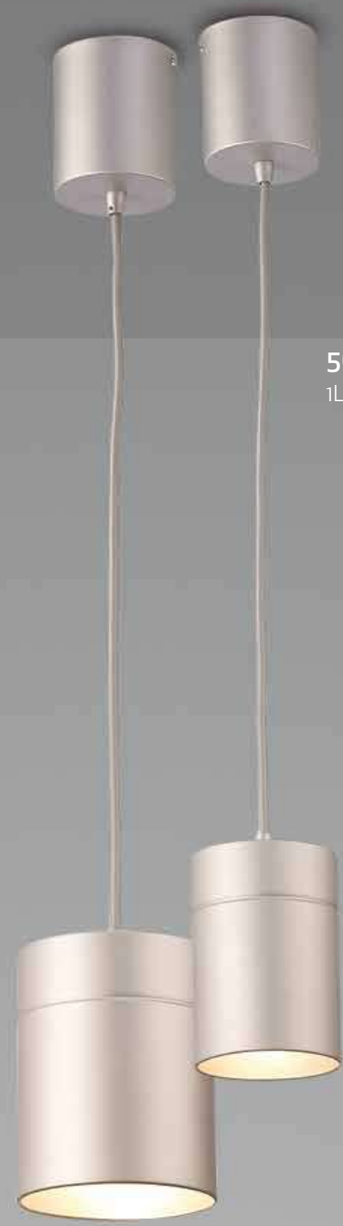



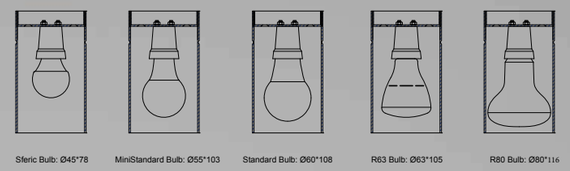

NOT INCLUDED

garantía mantenimiento 2 AÑOS WARRANTY GARANTIA

IP20

Metal-*Metal* 100-240V ~ 50/60Hz máx. 20W LED

ErP COMPLIANT

RoHS compliant



6044
pág. 218

6015
pág. 202

5626
pág. 204

GLACIAR

Foco Superficie-*Spotlight*

by Santiago Sevillano

7730 Blanco-*White*
LED 9W 3000K 700lm


7731 Blanco-*White*
LED 9W 4000K 700lm

7732 Blanco-*White*
LED 9W 3000K 700lm

7733 Blanco-*White*
LED 9W 4000K 700lm

7734 Blanco-*White*
LED 9W 3000K 700lm

7735 Blanco-*White*
LED 9W 4000K 700lm

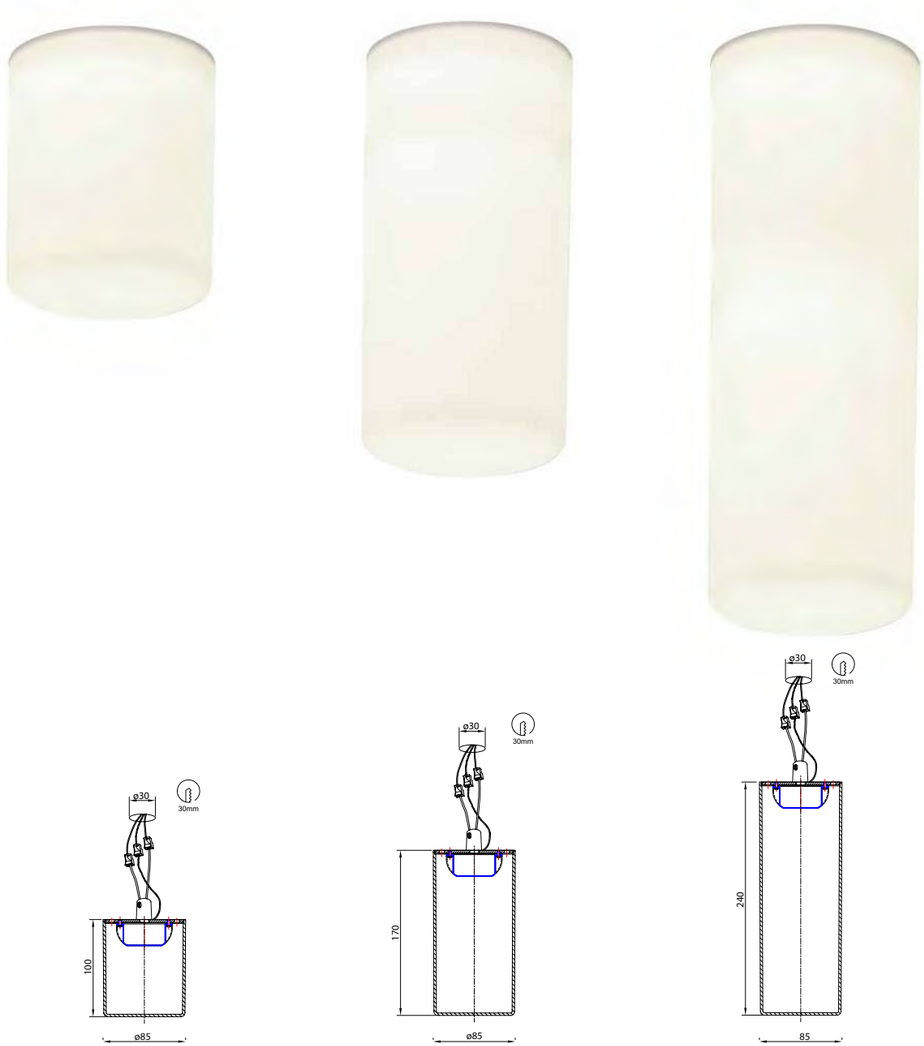

30mm | LED life / LED vida 30.000 h | ON / OFF 30.000 | garantía mantenimiento 5 WARRANTY GARANTIA LED | LED INCLUDED | IP44

Acrílico-Arcylic 220-240V~ 50/60Hz CRI:⩾ 80



Foco Superficie/Aplique-*Spot/Wall Lamp*


by Hugo Tejada

7294 Blanco-*White*
1L x GU10 (no incl.)



7295 Negro-*Black*
1L x GU10 (no incl.)







NOT INCLUDED


garantía mantenimiento 2 AÑOS WARRANTY GARANTIA

IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz GU10 máx.12W Led




Registered **Nº 007663331-0013**

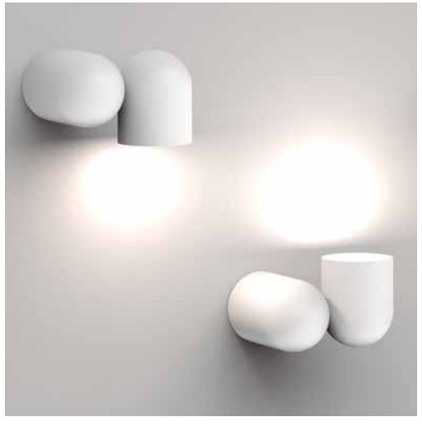

6281 Blanco Mate-*Matt White*

3L×GU10




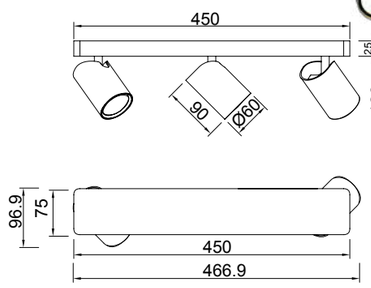

6282 Blanco Mate-*Matt White*

2L×GU10







Bombillas Recomendadas/ Suggested Bulbs
R09196 R09214 R09197

6711 Negro Mate-*Matt Black*

3L×GU10



6712 Negro Mate-*Matt Black*

2L×GU10





6284 pág. 70
6281 pág. 196
7522 pág. 148
7521 pág. 134

NOT INCLUDED

garantía mantenga con 2 WARRANTY GARANTÍA

IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz máx. 10 W LED

Regleta-*Spot Light*

SAL

6280 Blanco Mate-*Matt White*


4L×GU10



6710 Negro Mate-*Matt Black*

4L×GU10



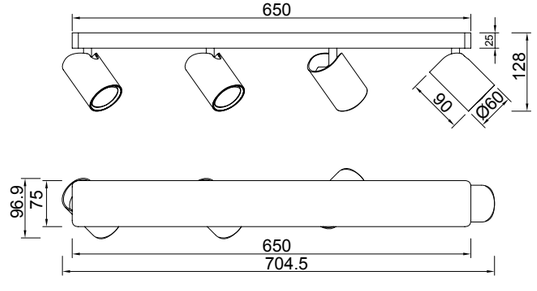

ErP COMPLIANT

RoHS compliant

NOT INCLUDED

garantía mantenga con 2 WARRANTY GARANTÍA

IP20


Aluminio-*Aluminium* 100-240V~ 50/60Hz máx. 10 W LED

6283 Blanco Mate-*Matt White*
1×GU10



6713 Negro Mate-*Matt Black*
1×GU10









6284
pág. 70



6281
pág. 196



7522
pág. 148



7521
pág. 134

Bombillas Recomendadas/ Suggested Bulbs
R09196 R09214 R09197

NOT INCLUDED

garantía mantenga.org 2 WARRANTY GARANTÍA

IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz máx. 10 W LED



ErP COMPLIANT

RoHS compliant


6830 Blanco Arena-*Sand White*
LED 7W 3000K 520 lm

6833 Negro Arena-*Sand Black*
LED 7W 3000K 520 lm

6832 Blanco Arena-*Sand White*
LED 7W 4000K 560 lm


6831 Negro Arena-*Sand Black*
LED 7W 4000K 560 lm








C Plane Distribution Diagram




C Plane	[50%MaxAng.]	[10%MaxAng.]
C180.0_360.0:	105.3	163.4
C0.0_180.0 :	105.3	163.4
C90.0_270.0 :	105.6	164.1

Illuminance-Distance Curve

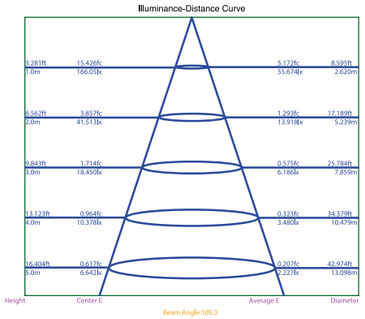




Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

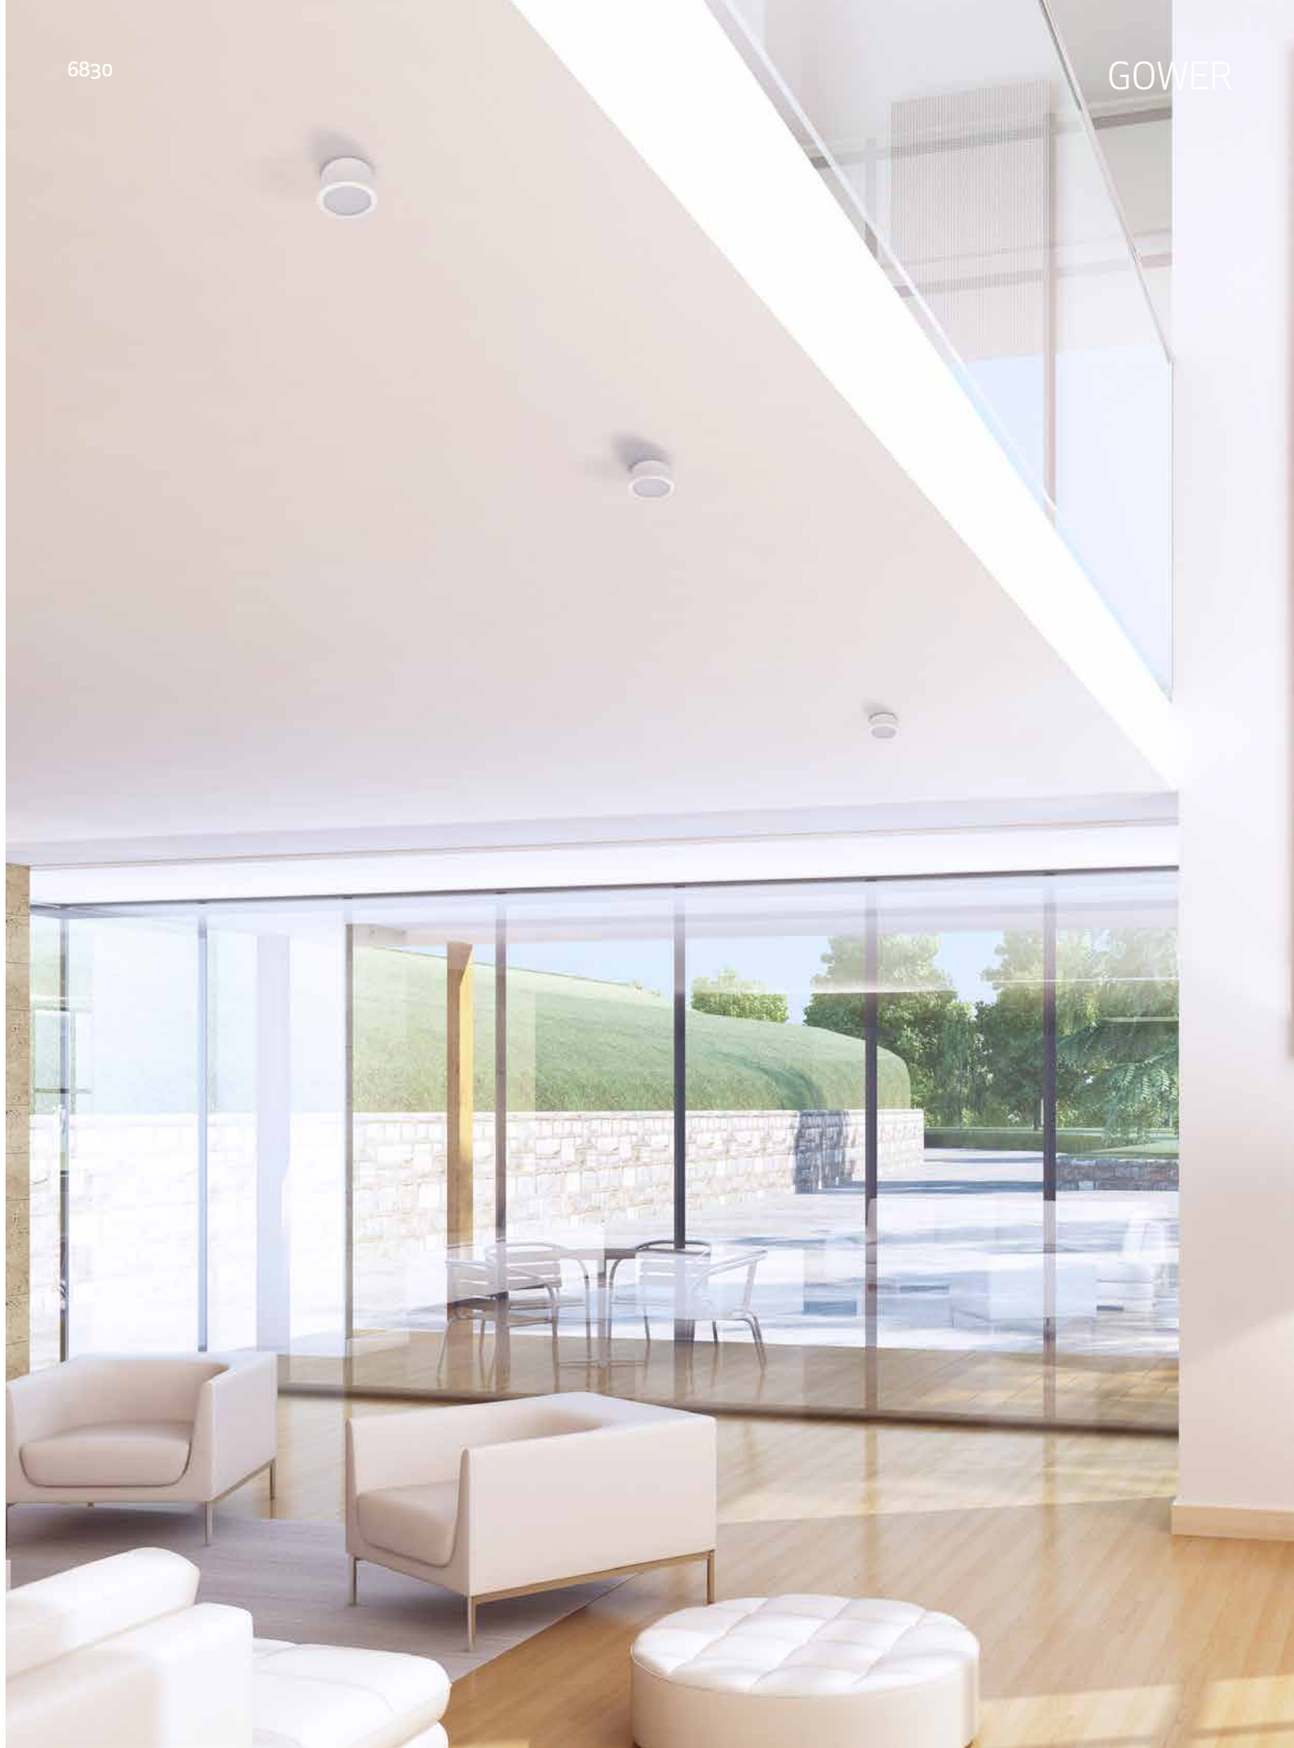

ARUBA


6015 Blanco-*White*
1L × E27








6016 Plata-*Silver*
1L × E27





Sferic Bulb: Ø45*78


MiniStandard Bulb: Ø55*103


Standard Bulb: Ø60*108


R63 Bulb: Ø63*105


R80 Bulb: Ø80*116



6044
pág. 218



5622
pág. 190

NOT INCLUDED

garantía mantenimiento 2 AÑOS WARRANTY GARANTÍA

IP20

Metal-*Metal* 100-240V~ 50/60Hz máx. 20W LED

ARUBA






ErP COMPLIANT

RoHS compliant

ARUBA

5626 Blanco-*White*
1L × E27






5628 Plata-*Silver*
1L × E27






5627 Blanco-*White*
1L × E27





5629 Plata-*Silver*
1L × E27



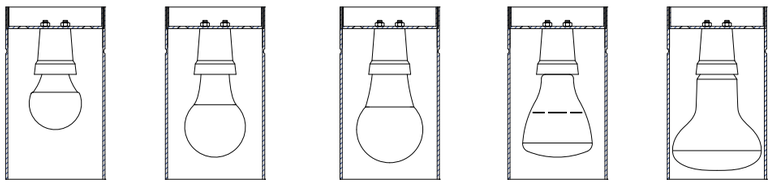



Metal-*Metal* 100-240V~ 50/60Hz máx. 20W LED



5622
pág. 190




5624
pág. 191

ARUBA








C0087 Blanco Mate-*Matt White*
LED 12W 3000K 1040 lm

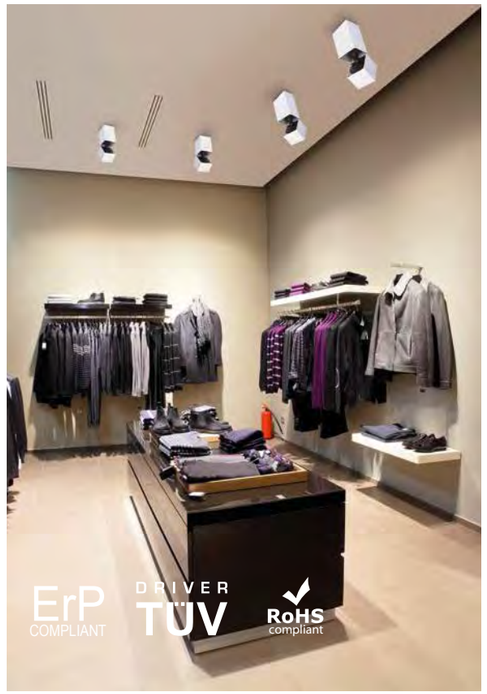



C0088 Blanco Mate-*Matt White*
LED 12W 4000K 1090 lm


























Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80





C0085 Blanco Mate-*Matt White*
LED 12W 3000K 1040 lm





C0086 Blanco Mate-*Matt White*
LED 12W 4000K 1090 lm


























Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80


5632 Blanco mate-*Matt White*
2 X GU10





5633 Blanco mate-*Matt White*
1 X GU10





NOT INCLUDED

garantía mantiene.org 2 WARRANTY GARANTÍA

IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz máx. 12 W LED

ErP COMPLIANT

DRIVER TÜV

RoHS compliant

Foco carril trifásico-*Triphasic rail spot*

ÍPSILON


by David Villalba


CRI≥90


7315 Blanco-*White*
LED 35W **3000k** 3500lm


7316 Blanco-*White*
LED 35W **4000k** 3850lm












Lentes-*Lens*
ref **7319** _13º
ref **7320** _24º
ref **7321** _38º *Included.*



Panal de abeja-*Honeycomb*
ref **7322**





TIR LENS

LED life / LED vida 50.000 h


ON / OFF 30.000

garantía mantenga 5 AÑOS WARRANTY GARANTIA LED

LED INCLUDED

IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 90

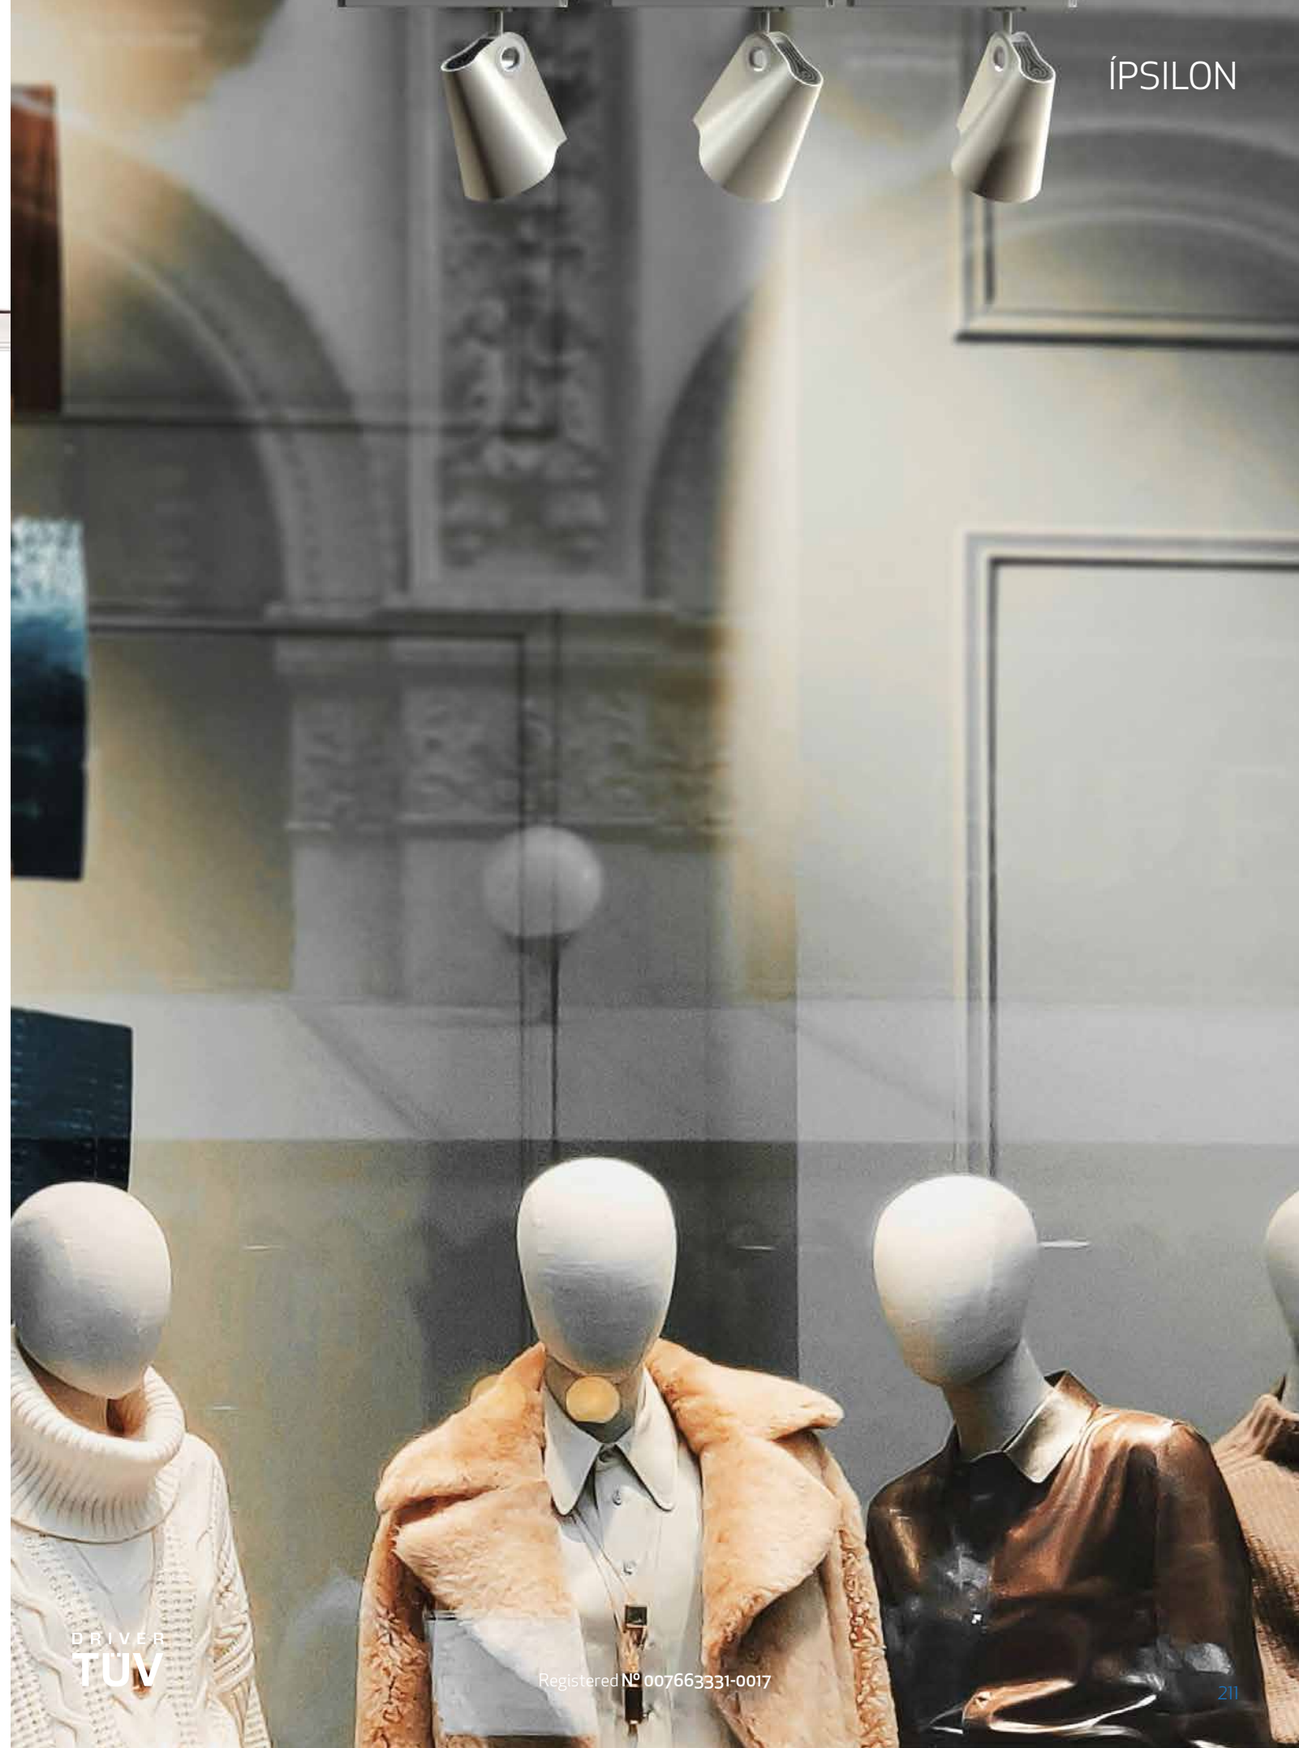

ÍPSILON

by David Villalba

CRI≥90

7317 Negro-*Black*
LED 35W **3000k** 3500lm

7318 Negro-*Black*
LED 35W **4000k** 3850lm








Lentes-*Lens*
ref **7319** _13º
ref **7320** _24º
ref **7321** _38º *Included.*



Panal de abeja-*Honeycomb*
ref **7322**





TIR LENS

LED life / LED vida 50.000 h

ON / OFF 30.000

garantía mantenimiento 5 WARRANTY GARANTÍA LED

LED INCLUDED

IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 90

DRIVER TÜV


Registered Nº 007663331-0017


PAGODA

by David Villalba

7788 Blanco-*White*
1× **GU10**

7789 Negro-*Black*
1× **GU10**











7787
pág. 164

NOT INCLUDED

garantía mantiene.org 2 AÑOS WARRANTY GARANTÍA

IP20

Metal-*Metal* 100-240V ~ 50/60Hz máx. 12W LED


PAGODA


CRI≥90 UGR<16

7780 Blanco-*White*
LED 12,5W **3000K** 950lm



7781 Blanco-*White*
LED 12,5W **4000K** 1050lm

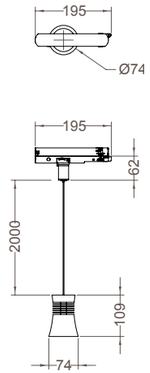

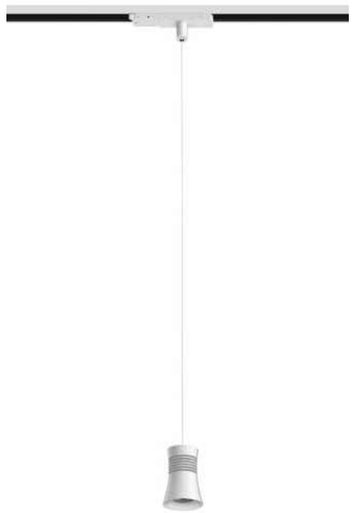

7782 Negro-*Black*
LED 12,5W **3000K** 950lm



7783 Negro-*Black*
LED 12,5W **4000K** 1050lm





38° TIR LENS UGR<16 LED life / LED vida 50.000 h ON / OFF 30.000 garantia.manfrotto.org 5 YEAR WARRANTY GARANTÍA LED LED INCLUDED IP20

Aluminio-*Aluminium* **220-240V**~ 50/60Hz CRI:≥ 90


ARUBA


6044 Blanco-*White*
1L × E27


6045 Negro-*Black*
1L × E27











Sferic Bulb: Ø45*78


MiniStandard Bulb: Ø55*103


Standard Bulb: Ø60*108


R63 Bulb: Ø63*105


R80 Bulb: Ø80*116










Metal-*Metal* 100-240V~ 50/60Hz máx 20W Led

6044-5622

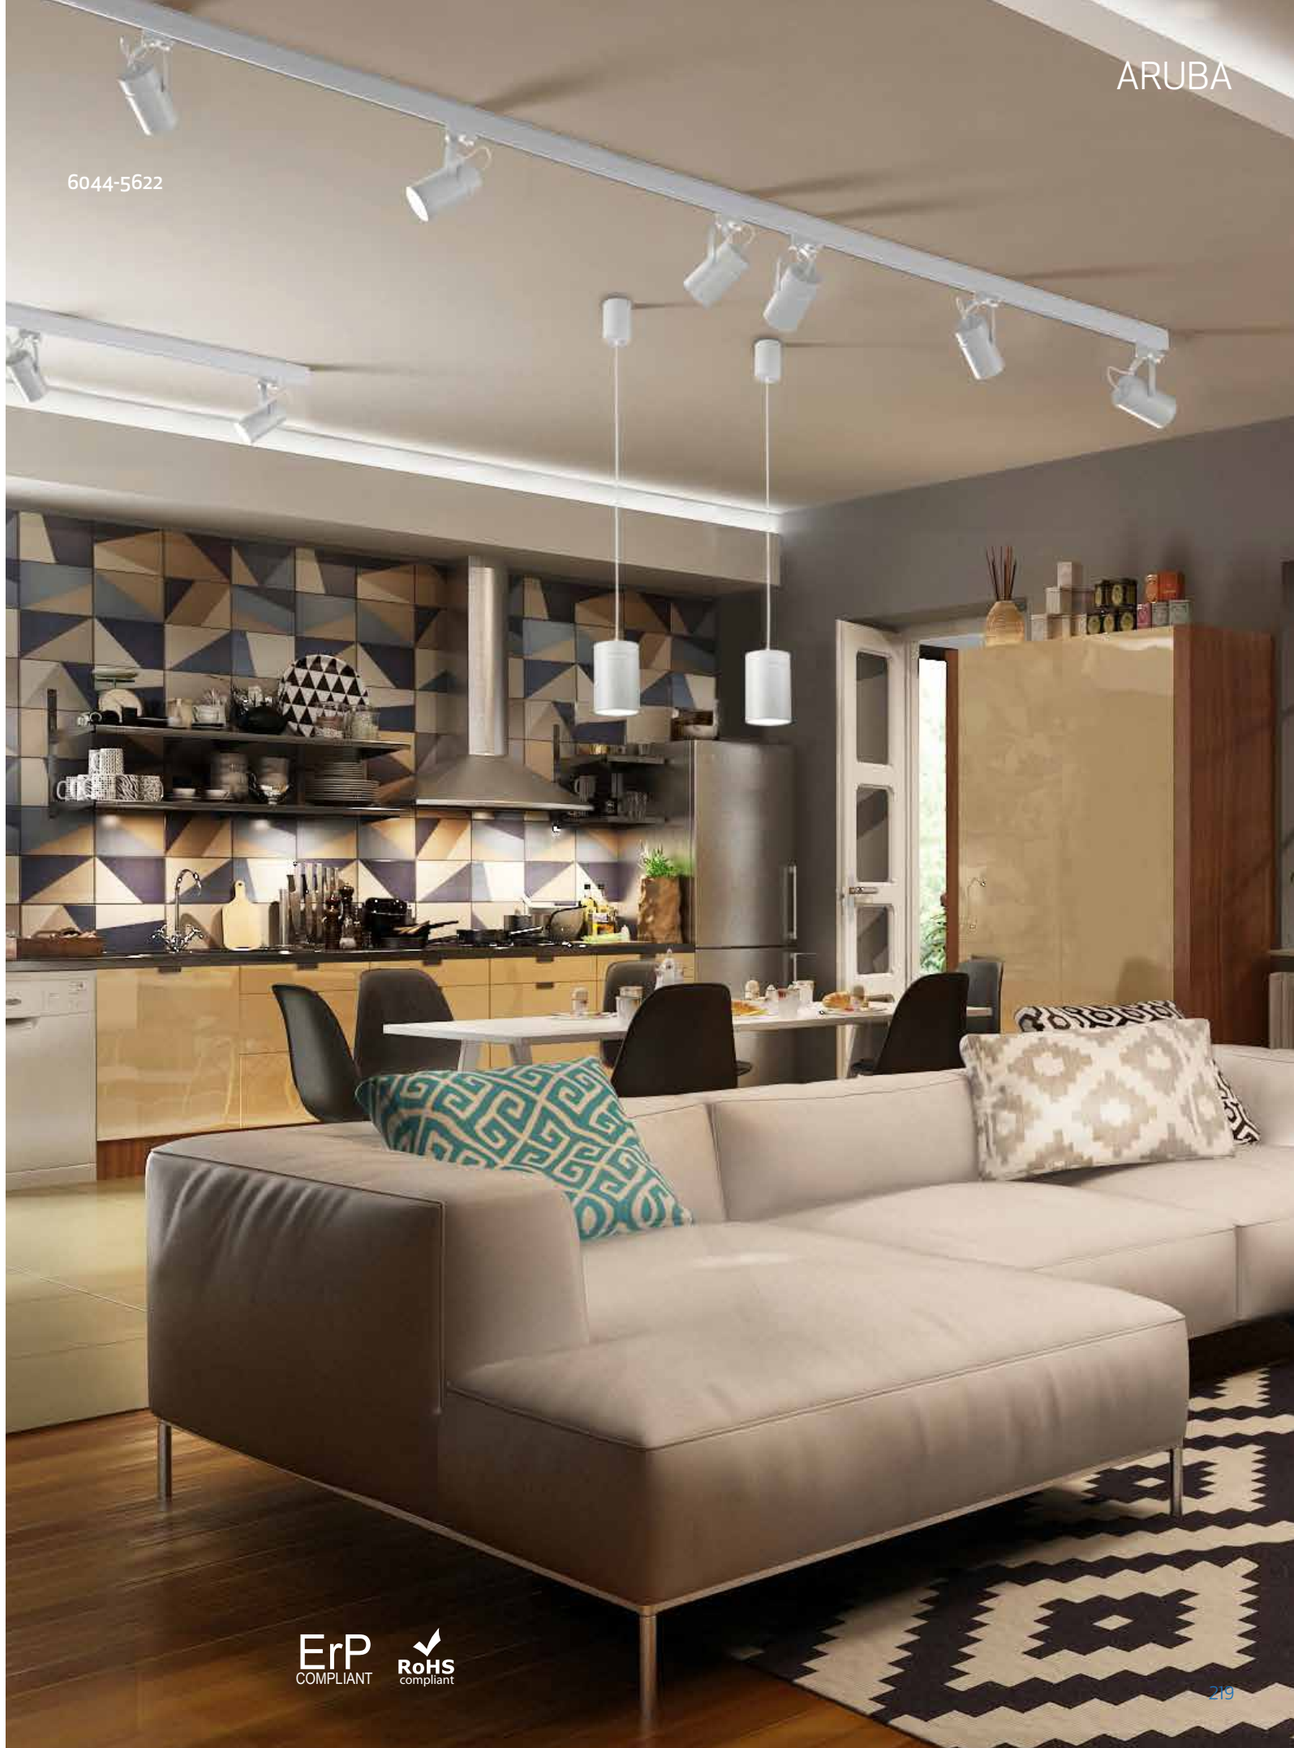

Foco carril trifásico-*Triphasic rail spot*

6717 Blanco-*White*
1xGU10

6718 Negro-*Black*
1xGU10








6284
pág. 70



6281
pág. 196

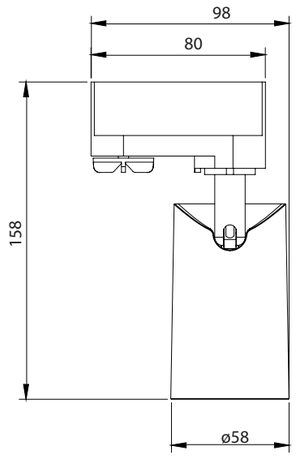

NOT INCLUDED

garantía mantenimiento 2 AÑOS YEARS WARRANTY GARANTÍA

IP20

Aluminio-*Aluminium* 100-240V~ 50/60Hz máx. 10 W LED



ErP COMPLIANT

RoHS compliant

Foco carril trifásico-*Triphasic rail spot*

FIJI

CRI≥90

7200 Blanco-*White*
LED 15W **3000K** 1500lm

7201 Blanco-*White*
LED 20W **3000K** 2000lm

7202 Blanco-*White*
LED 30W **3000K** 3000lm

7203 Blanco-*White*
LED 40W **3000K** 4000lm


7204 Blanco-*White*
LED 15W **4000K** 1650lm


7205 Blanco-*White*
LED 20W **4000K** 2200lm


7206 Blanco-*White*
LED 30W **4000K** 3300lm


7207 Blanco-*White*
LED 40W **4000K** 4400lm











ÓPTICAS 15/20W
ref **7216** _15º
ref **7217** _24º
ref **7218** _38º Included.

ÓPTICAS 15/20W
ref **7216** _15º
ref **7217** _24º
ref **7218** _38º Included.

ÓPTICAS 30W
ref **7219** _15º
ref **7220** _24º
ref **7221** _38º Included.

ÓPTICAS 40W
ref **7222** _15º
ref **7223** _24º
ref **7224** _38º Included.









LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 90



FIJI

CRI≥90

7208 Negro-*Black*
LED 15W **3000K** 1500lm

7209 Negro-*Black*
LED 20W **3000K** 2000lm

7210 Negro-*Black*
LED 30W **3000K** 3000lm

7211 Negro-*Black*
LED 40W **3000K** 4000lm


7212 Negro-*Black*
LED 15W **4000K** 1650lm


7213 Negro-*Black*
LED 20W **4000K** 2200lm


7214 Negro-*Black*
LED 30W **4000K** 3300lm


7215 Negro-*Black*
LED 40W **4000K** 4400lm











ÓPTICAS 15/20W
ref **7216** _15º
ref **7217** _24º
ref **7218** _38º Included.

ÓPTICAS 15/20W
ref **7216** _15º
ref **7217** _24º
ref **7218** _38º Included.

ÓPTICAS 30W
ref **7219** _15º
ref **7220** _24º
ref **7221** _38º Included.

ÓPTICAS 40W
ref **7222** _15º
ref **7223** _24º
ref **7224** _38º Included.









LED life / LED vida 50.000 h
ON / OFF 30.000
garantía mantenimiento 5 WARRANTY GARANTIA LED
LED INCLUDED
IP20


Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI≥ 90

NEW COLLECTION

DRIVER
TÜV

LED 15W 4000K 38º


Luminous Intensity Distribution Curve

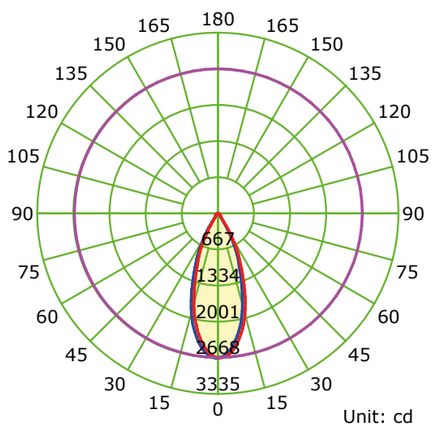

Average Diffuse Angle(50%): 39.4°

C0-C180 C90-C270 G1

Illuminance at a Distance

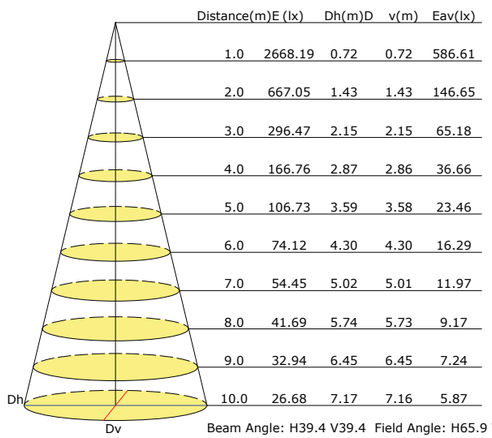


Distance(m)	E (lx)	Dh(m)	D	v(m)	Eav(lx)
1.0	2668.19	0.72		0.72	586.61
2.0	667.05	1.43		1.43	146.65
3.0	296.47	2.15		2.15	65.18
4.0	166.76	2.87		2.86	36.66
5.0	106.73	3.59		3.58	23.46
6.0	74.12	4.30		4.30	16.29
7.0	54.45	5.02		5.01	11.97
8.0	41.69	5.74		5.73	9.17
9.0	32.94	6.45		6.45	7.24
10.0	26.68	7.17		7.16	5.87

Beam Angle: H39.4 V39.4 Field Angle: H65.9 V65.7

LED 20W 4000K 38º


Luminous Intensity Distribution Curve

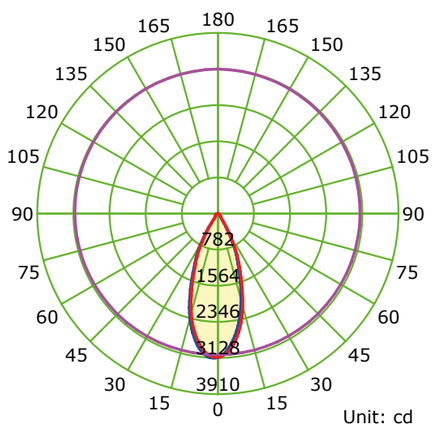

Average Diffuse Angle(50%): 39.8°

C0-C180 C90-C270 G2

Illuminance at a Distance

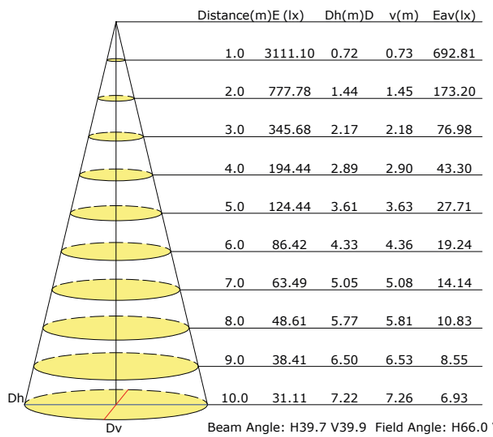


Distance(m)	E (lx)	Dh(m)	D	v(m)	Eav(lx)
1.0	3111.10	0.72		0.73	692.81
2.0	777.78	1.44		1.45	173.20
3.0	345.68	2.17		2.18	76.98
4.0	194.44	2.89		2.90	43.30
5.0	124.44	3.61		3.63	27.71
6.0	86.42	4.33		4.36	19.24
7.0	63.49	5.05		5.08	14.14
8.0	48.61	5.77		5.81	10.83
9.0	38.41	6.50		6.53	8.55
10.0	31.11	7.22		7.26	6.93

Beam Angle: H39.7 V39.9 Field Angle: H66.0 V66.1

LED 30W 4000K 38º


Luminous Intensity Distribution Curve

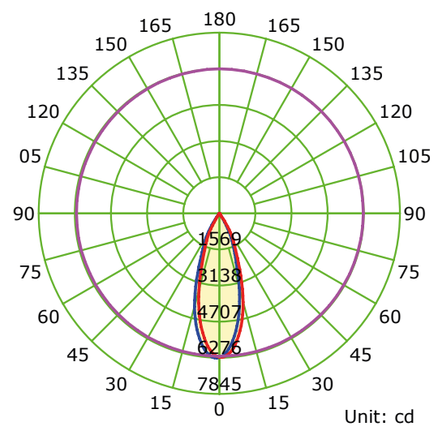

Average Diffuse Angle(50%): 34.3°

C0-C180 C90-C270 G1

Illuminance at a Distance

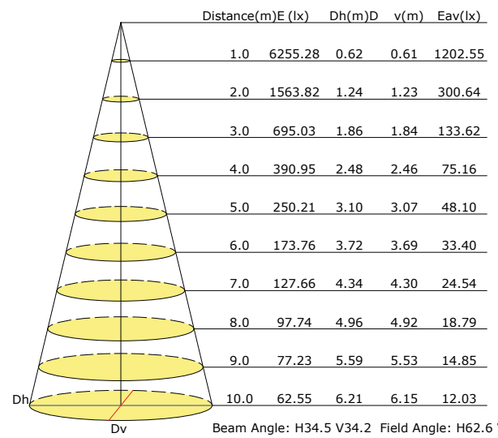


Distance(m)	E (lx)	Dh(m)	D	v(m)	Eav(lx)
1.0	6255.28	0.62		0.61	1202.55
2.0	1563.82	1.24		1.23	300.64
3.0	695.03	1.86		1.84	133.62
4.0	390.95	2.48		2.46	75.16
5.0	250.21	3.10		3.07	48.10
6.0	173.76	3.72		3.69	33.40
7.0	127.66	4.34		4.30	24.54
8.0	97.74	4.96		4.92	18.79
9.0	77.23	5.59		5.53	14.85
10.0	62.55	6.21		6.15	12.03

Beam Angle: H34.5 V34.2 Field Angle: H62.6 V62.3

LED 40W 4000K 38º


Luminous Intensity Distribution Curve

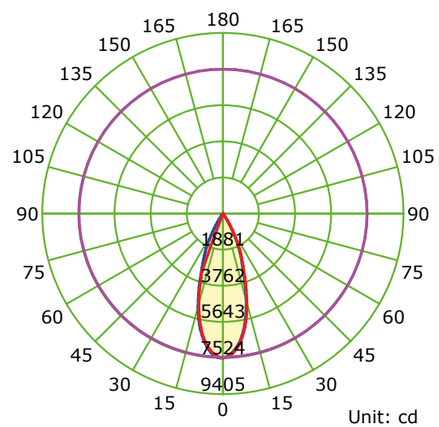

Average Diffuse Angle(50%): 36.6°

C0-C180 C90-C270 G1

Illuminance at a Distance

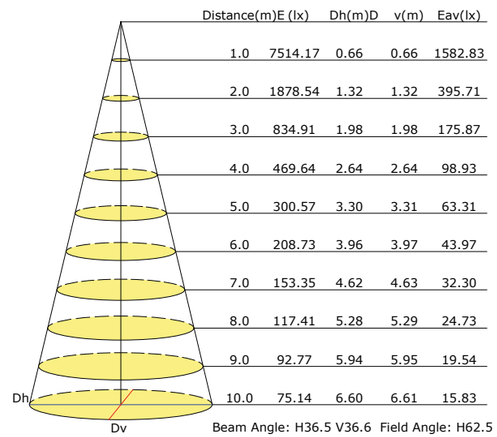


Distance(m)	E (lx)	Dh(m)	D	v(m)	Eav(lx)
1.0	7514.17	0.66		0.66	1582.83
2.0	1878.54	1.32		1.32	395.71
3.0	834.91	1.98		1.98	175.87
4.0	469.64	2.64		2.64	98.93
5.0	300.57	3.30		3.31	63.31
6.0	208.73	3.96		3.97	43.97
7.0	153.35	4.62		4.63	32.30
8.0	117.41	5.28		5.29	24.73
9.0	92.77	5.94		5.95	19.54
10.0	75.14	6.60		6.61	15.83

Beam Angle: H36.5 V36.6 Field Angle: H62.5 V52.7

Alimentador intermedio recto- *Middle feed straight*



XTS 142 Negro-*Black*
XTS 143 Blanco-*White*






Conector intermedio recto-*Middle Straight Connector*



XTS 212 Negro-*Black*
XTS 213 Blanco-*White*




Conector esquina ajustable-*Adjustable corner connector*


XTS 242 Negro-*Black*
XTS 243 Blanco-*White*




Conexión alimentador en L- polaridad interna
L-Feed Polarity Internal


XTS 342 Negro-*Black*
XTS 343 Blanco-*White*




Conexión alimentador en L- polaridad externa
L-Feed Polarity external

XTS 352 Negro-*Black*
XTS 353 Blanco-*White*





Kit suspension carril 1,5 m -Suspension Kit 1,5 m

SPW11SK 215 length **1500 mm** Negro-*Black*
SPW11SK 315 length **1500 mm** Blanco-*White*






Placa cubrir para XTS112/XTS122/XTS142
XTSF 102 Negro-*Black*




Cover Plate for XTS113/XTS123/XTS143
XTSF 103 Blanco-*White*



Placa cubrir para XTS342/XTS352
XTSF 302 Negro-*Black*





Cover Plate for XTS343/XTS353
XTSF 303 Blanco-*White*



Leva fijación techo fundición
Standard Clamp Die Cast

SKB 122 Negro-*Black*
SKB 123 Blanco-*White*





TRACKS

Carril Superficie-*Surface mounted track*

XTS 41002 Negro-*Black*
XTS 41003 Blanco-*White*
Track length **1000 mm**



XTS 42002 Negro-*Black*
XTS 42003 Blanco-*White*
Track length **2000 mm**

Carril de empotrar-*Recessed track*

XTSF41002 Negro-*Black*
XTSF41003 Blanco-*White*
Track length **1000 mm**

XTSF42002 Negro-*Black*
XTSF 42003 Blanco-*White*
Track length **2000 mm**











Final alimentador polaridad derecha-*End Feed Polarity Right*



XTS 112 Negro-*Black*
XTS 113 Blanco-*White*




Final alimentador polaridad izquierda-*End Feed Polarity left*



XTS 122 Negro-*Black*
XTS 123 Blanco-*White*




Tapa final-*End Cap*

XTS 412 Negro-*Black*
XTS 413 Blanco-*White*






IP54

6855 Blanco Arena-*Sand White*
LED 3W 3000K 210lm











6856 Negro Arena-*Sand Black*
LED 3W 3000K 210lm

6857 Blanco Arena-*Sand White*
LED 5W 3000K 410lm











6858 Negro Arena-*Sand Black*
LED 5W 3000K 410lm

6859 Blanco Arena-*Sand White*
LED 3W 4000k 210lm










35 mm

6860 Negro Arena-*Sand Black*
LED 3W 4000k 210lm

6861 Blanco Arena-*Sand White*
LED 5W 4000k 410lm







49mm

6862 Negro Arena-*Sand Black*
LED 5W 4000k 410lm

LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantraco 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP54

Aluminio-*Aluminium* 100-240V~ 50/60Hz CRI:≥ 80


Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

GUINCHO
2700K

IP54

7080 Blanco-*White*
LED 3W 210 lm











7081 Negro-*Black*
LED 3W 210 lm








7082 Blanco-*White*
LED 5W 410lm











7083 Negro-*Black*
LED 5W 410lm







LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenga con 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP54


Aluminio-*Aluminium* 220-240V ~ 50/60Hz CRI≥ 80


GUINCHO
2700K

GUINCHO GU10

7535 Blanco arena-*Sand white*
1 × GU10







7536 Negroarena-*Sand black*
1 × GU10



67mm

NOT INCLUDED


garantía mantenimiento 2 AÑOS WARRANTY GARANTIA

IP20


Aluminio-*Aluminium* 100-240V ~ 50/60Hz 1×GU10 máx 10W Led

NEPTUNO

7451 Blanco-*White*
LED 3W **3000K** 210lm




Unit: cd




7453 Negro-Black
LED 3W **3000K** 210lm

7452 Blanco-*White*
LED 3W **4000K** 220lm




Unit: cd



7454 Negro-Black
LED 3W **4000K** 220lm





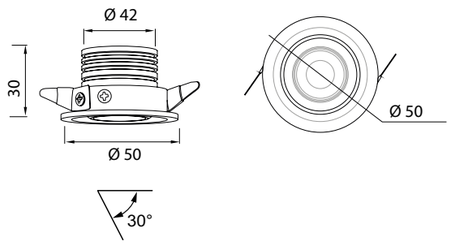




Aluminio-*Aluminium* **100-240V~ 50/60Hz** CRI:≥ 90








6400 Blanco-*White*
7W 3000K 610lm


6401 Blanco-*White*
7W 4000K 630lm












ErP COMPLIANT · DRIVER TÜV · RoHS compliant



LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenga usted 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20


Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80








6402 Blanco-*White*
12W 3000K 1020lm


6403 Blanco-*White*
12W 4000K 1080lm














ErP COMPLIANT · DRIVER TÜV · RoHS compliant


LED life / LED vida 30.000 h · ON / OFF 30.000 · garantía mantenga usted 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

FORMENTERA



C0073 - C0074
C0071 - C0072



C0077 - C0078
C0075 - C0076

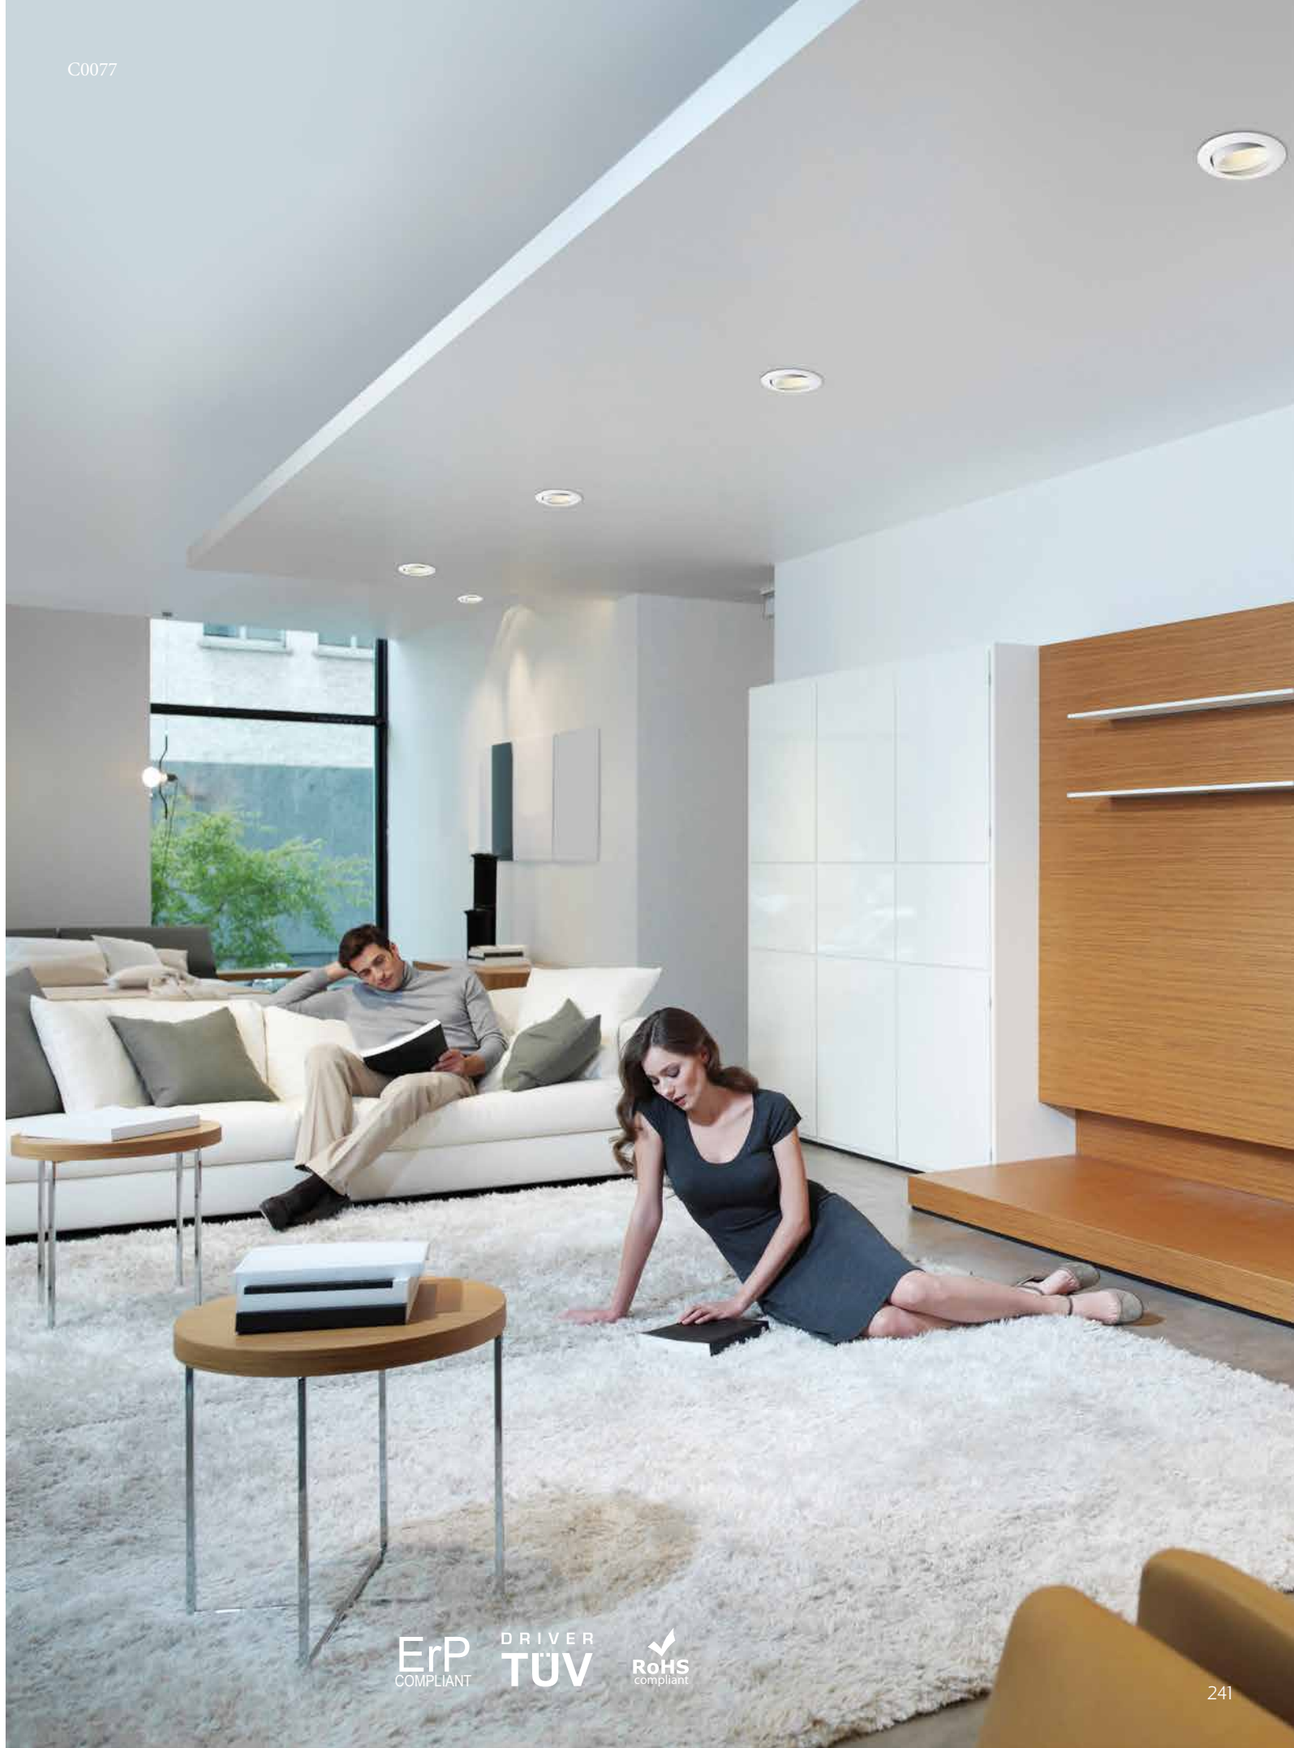
C0077
ErP
COMPLIANT
DRIVER
TÜV
RoHS
compliant

C0073 Blanco Mate-*Matt White*

LED 12W 3000K 1040lm










C0074 Blanco Mate-*Matt White*

LED 12W 4000K 1080lm












C0077 Blanco Mate-*Matt White*

LED 12W 3000K 920lm













C0078 Blanco Mate-*Matt White*

LED 12W 4000K 940lm









C0071 Blanco Mate-*Matt White*

LED 7W 3000K 610lm










C0072 Blanco Mate-*Matt White*

LED 7W 4000K 650lm












C0075 Blanco Mate-*Matt White*

LED 7W 3000K 610lm













C0076 Blanco Mate-*Matt White*

LED 7W 4000K 650lm





















Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

















Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80


C0079 Blanco Mate-*Matt White*

LED 7W 3000K 610lm










C0079-C0080


70mm

C0080 Blanco Mate-*Matt White*

LED 7W 4000K 650lm









ErP COMPLIANT · DRIVER TÜV · RoHS compliant

35° · LED life / LED vida 30.000 h · ON / OFF 30.000 · garantia mantraco.org 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP20

Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

CABRERA



Ref.C0041 - Ref.C0042



Ref.C0047 - Ref.C0048



Ref.C0043 - Ref.C0044




Ref.C0049 - Ref.C0050

C0044


CABRERA


Empotrable-*Recessed*



C0041 Blanco Mate-*Matt White*
LED 7W 3000K 540lm


C0042 Blanco Mate-*Matt White*
LED 7W 4000K540lm

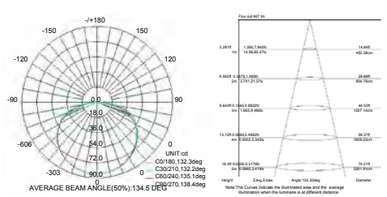

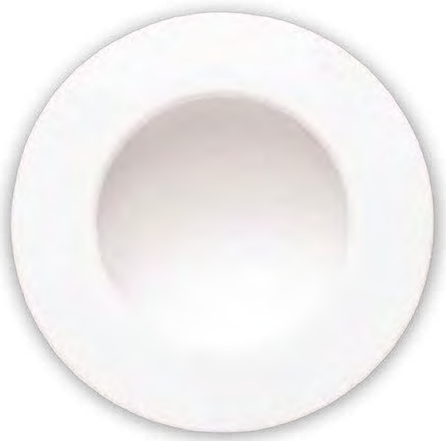



C0047 Blanco Mate-*Matt White*
LED 12W 3000K 1080lm

C0048 Blanco Mate-*Matt White*
LED 12W 4000K 1080lm












Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

Empotrable-*Recessed*




C0043 Blanco Mate-*Matt White*
LED 24W 3000 K 2160lm

C0044 Blanco Mate-*Matt White*
LED 24W 4000 K 2160lm






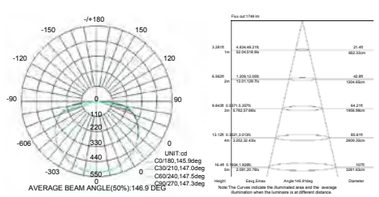



C0049 Blanco Mate-*Matt White*
LED 30W 3000 K 2550lm

C0050 Blanco Mate-*Matt White*
LED 30W 4000 K 2600lm











Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80


UGR<19



6395 Blanco-*White*
LED 21W 3000K 1900lm





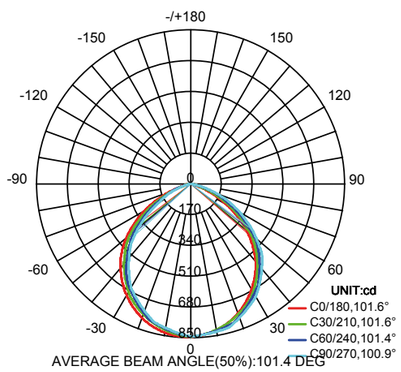


AVERAGE BEAM ANGLE(50%):101.4 DEG

UGR<19

6396 Blanco-*White*
LED 21W 4000K 2100lm



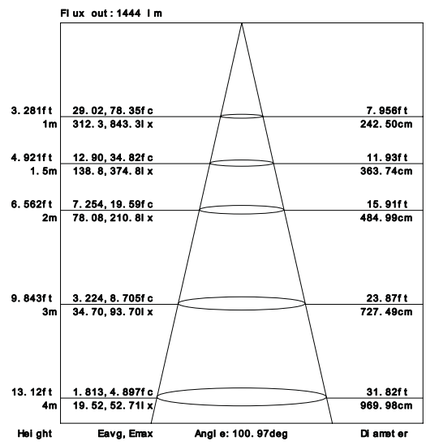

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


UGR<19 | LED life / LED vida 30.000 h | ON / OFF 30.000 | garantía mantracon 5 años WARRANTY GARANTIA LED | LED INCLUDED | IP20


SPCC-PBT / PC 220-240V~ 50/60Hz CRI:≥ 80

UGR<19



6398 Blanco-*White*
LED 12W 3000K 1100lm

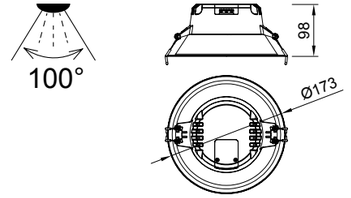

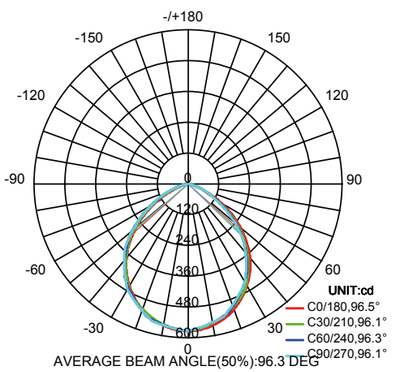


AVERAGE BEAM ANGLE(50%):96.3 DEG

UGR<19

6399 Blanco-*White*
LED 12W 4000K 1200lm



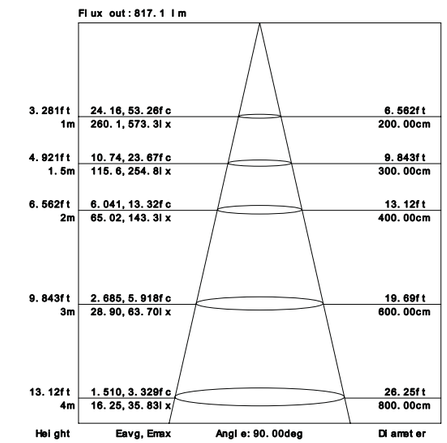

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

UGR<19 | LED life / LED vida 30.000 h | ON / OFF 30.000 | garantía mantracon 5 años WARRANTY GARANTIA LED | LED INCLUDED | IP20

SPCC-PBT / PC 220-240V~ 50/60Hz CRI:≥ 80





C0180 Blanco Mate-Matt White
LED 6W 540lm 4000K

C0184 Blanco Mate-Matt White
LED 6W 520lm 3000K





C0181 Blanco Mate-Matt White
LED 12W 1080lm 4000K


C0185 Blanco Mate-Matt White
LED 12W 990lm 3000K







SAONA

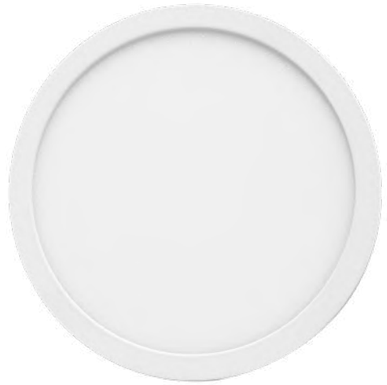

C0182 Blanco Mate-Matt White
LED 18W 1620lm 4000K

C0186 Blanco Mate-Matt White **LED**
LED 18W 1580lm 3000K







C0183 Blanco Mate-Matt White
LED 24W 2200lm 4000K

C0187 Blanco Mate-Matt White
LED 24W 2090lm 3000K






Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80



Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

SAONA

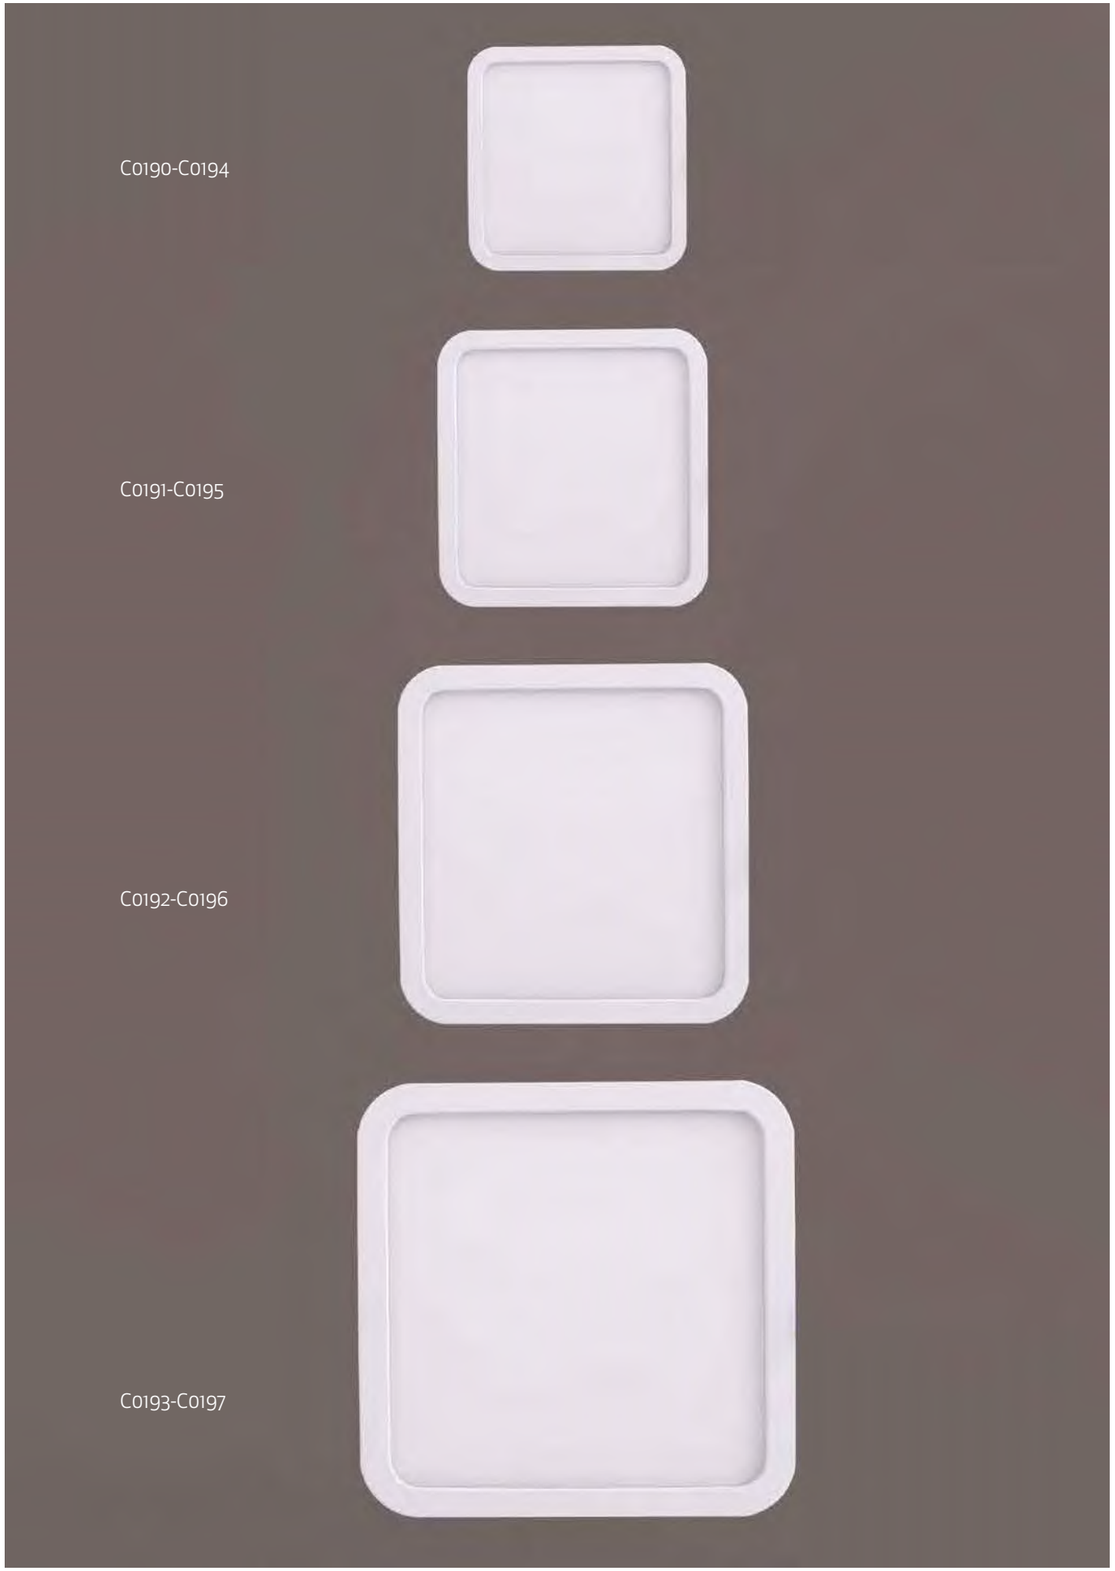
C0190-C0194
C0191-C0195
C0192-C0196
C0193-C0197


ErP
COMPLIANT
DRIVER
TÜV
RoHS
compliant

C0190 Blanco Mate-*Matt White*
LED 6W 540lm 4000K

C0194 Blanco Mate-*Matt White*
LED 6W 520lm 3000K



C0191 Blanco Mate-*Matt White*
LED 12W 1080lm 4000K

C0195 Blanco Mate-*Matt White*
LED 12W 990lm 3000K




C0192 Blanco Mate-*Matt White*
LED 18W 1620lm 4000K

C0196 Blanco Mate-*Matt White*
LED 18W 1580lm 3000K




C0193 Blanco Mate-*Matt White*
LED 24W 2200lm 4000K


C0197 Blanco Mate-*Matt White*
LED 24W 2090lm 3000K




80mm




130mm




160mm




210mm




AVERAGE BEAM ANGLE(50%):109.2 DEG




AVERAGE BEAM ANGLE(50%):109.2 DEG





AVERAGE BEAM ANGLE(50%):109.2 DEG




AVERAGE BEAM ANGLE(50%):109.2 DEG





















Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80













Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

BÁSICO GU10

30°

Nickel Satinado/Cromo
Satin Nickel /Chrome

C0002



C0001



Blanco Mate
Matt White

C0004



C0003



C0006

Aluminio Pulido
Polished Aluminium



C0005




C0008

Negro Mate
Matt Black




C0007







Aluminio-*Aluminium* 100-240V ~ 50/60Hz 1×GU10 máx 12 W Led

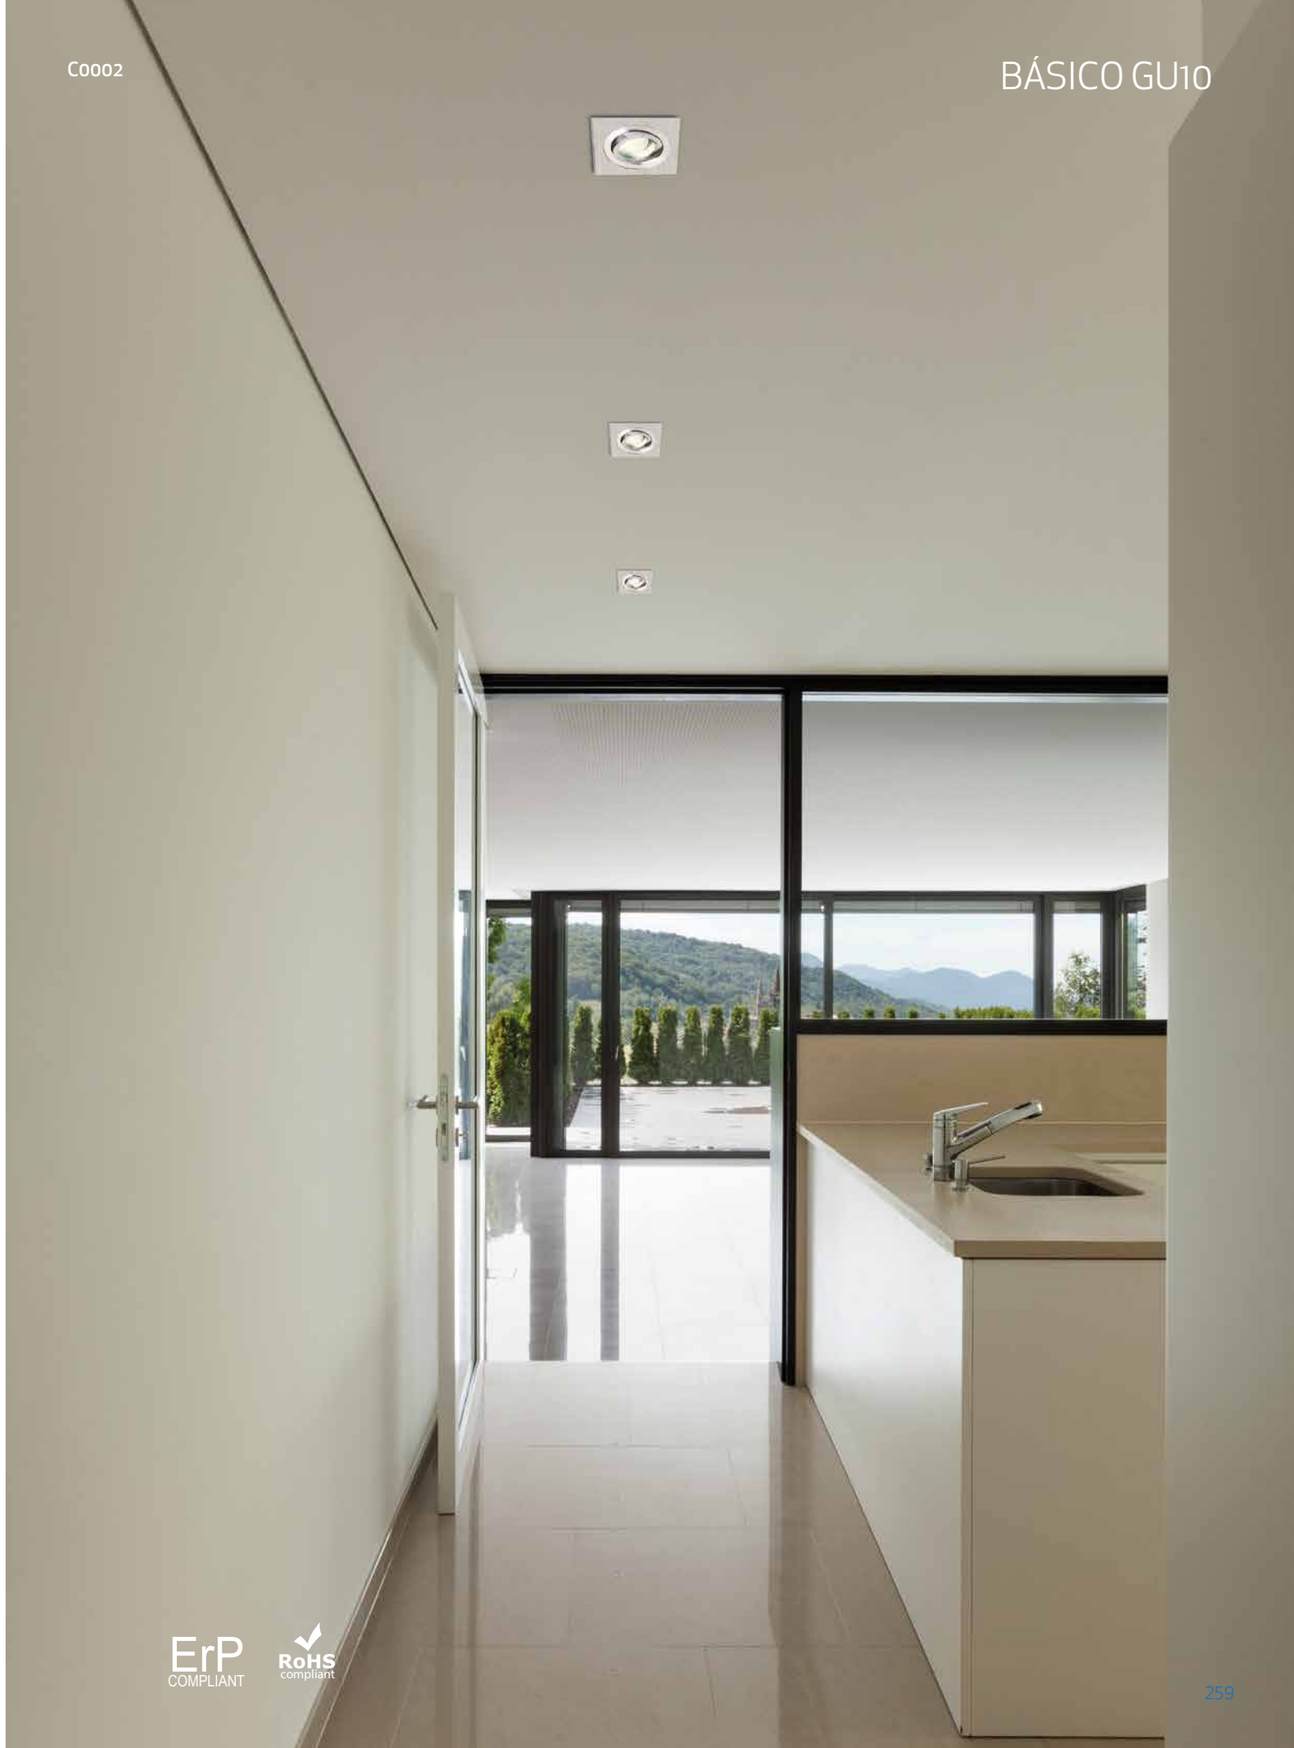


BÁSICO GU10



7740

Nickel Satinado/Cromo
Satin Nickel /Chrome





7741


Blanco Mate
Matt White





7742

Aluminio Pulido
Polished Aluminium






7743

Negro Mate
Matt Black





















Aluminio-*Aluminium* 100-240V ~ 50/60Hz 1×GU10 máx 12 W Led

COMFORT GU10

30°

C0160 Blanco Mate-*Matt White*
1 × GU10






C0161 Plata mate-*Matt silver*
1 × GU10







85mm

C0164 Negro Mate-*Matt Black*
1 × GU10





30°

NOT INCLUDED

garantía mantenida con 2 años WARRANTY GARANTIA

IP20

Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx 12W LED

ErP COMPLIANT

RoHS compliant




C0162 Blanco Mate-*Matt White*
1 × GU10





C0163 Plata mate-*Matt silver*
1 × GU10









NOT INCLUDED

garantía manufacturer 2 WARRANTY GARANTÍA


IP20

Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx 12W LED



C0165 Negro Mate-*Matt Black*
1 × GU10









NOT INCLUDED


garantía manufacturer 2 WARRANTY GARANTÍA


IP20


Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx 12W LED

6902 Blanco Mate-*Matt White*
1 × GU10













6903 Negro Mate-*Matt Black*
1 × GU10




6900 Blanco Mate-*Matt White*
1 × GU10











6901 Negro Mate-*Matt Black*
1 × GU10



NOT INCLUDED

garantía mantenimiento 2 AÑOS WARRANTY GARANTÍA


IP20


Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx 12W LED

LAMBOR JINI

30°

6835 Blanco-*White*
1 × GU10




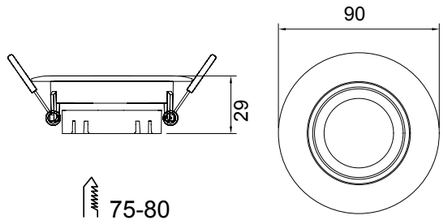


6837 Blanco-*White*
1 × GU10



6838 Negro-*Black*
1 × GU10



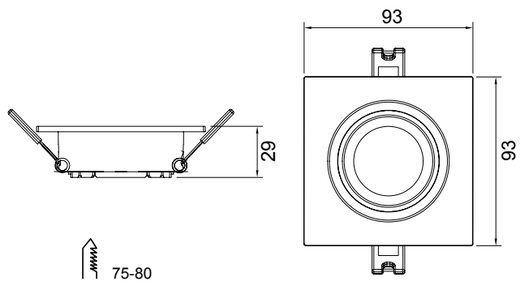

NOT INCLUDED

garantía mantraco.com 2 AÑOS WARRANTY GARANTIA

IP20

PCB by SAMSUNG

PCB by samsung 100-240V ~ 50/60Hz máx 12W LED


LAMBOR JINI

6839 Blanco-*White*
1 × GU10

6840 Negro-*Black*
1 × GU10 m








6841 Blanco-*White*
1 × GU10

6842 Negro-*Black*
1 × GU10








6843 Blanco-*White*
1 × GU10

6844 Negro-*Black*
1 × GU10










6845 Blanco-*White*
1 × GU10

6846 Negro-*Black*
1 × GU10









NOT INCLUDED

garantía mantraco.com 2 AÑOS WARRANTY GARANTÍA

IP20

PCB by SAMSUNG


PCB by samsung 100-240V ~ 50/60Hz máx 12W LED

METACRILATO




C0083 Blanco Mate-Matt White
LED 7W 3000 K 490lm








C0084 Blanco Mate-Matt White
LED 7W 4000 K 520lm























Aluminio-Aluminium 220-240V~ 50/60Hz CRI:≥ 80


GRACIOSA







6392 Blanco-*White*
LED 15,3W 3000K 1100lm

6393 Blanco-*White*
LED 15,3W 4000K 1200lm

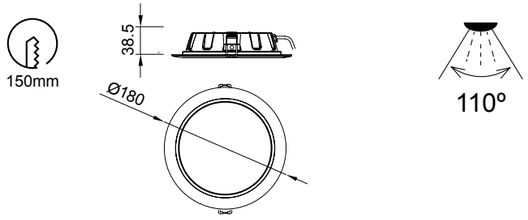

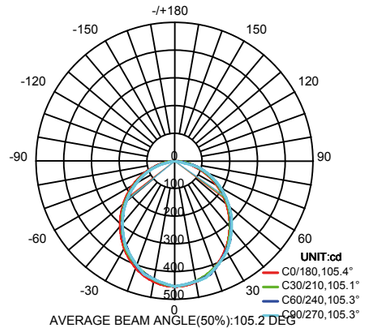


AVERAGE BEAM ANGLE(50%):105.2 DEG




Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.


6394 Blanco-*White*
LED 10,8W 3000K 820lm

6397 Blanco-*White*
LED 10,8W 4000K 850lm






AVERAGE BEAM ANGLE(50%):105.5 DEG



Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.




Aluminio-*Aluminium* 220-240V~ 50/60Hz CRI:≥ 80

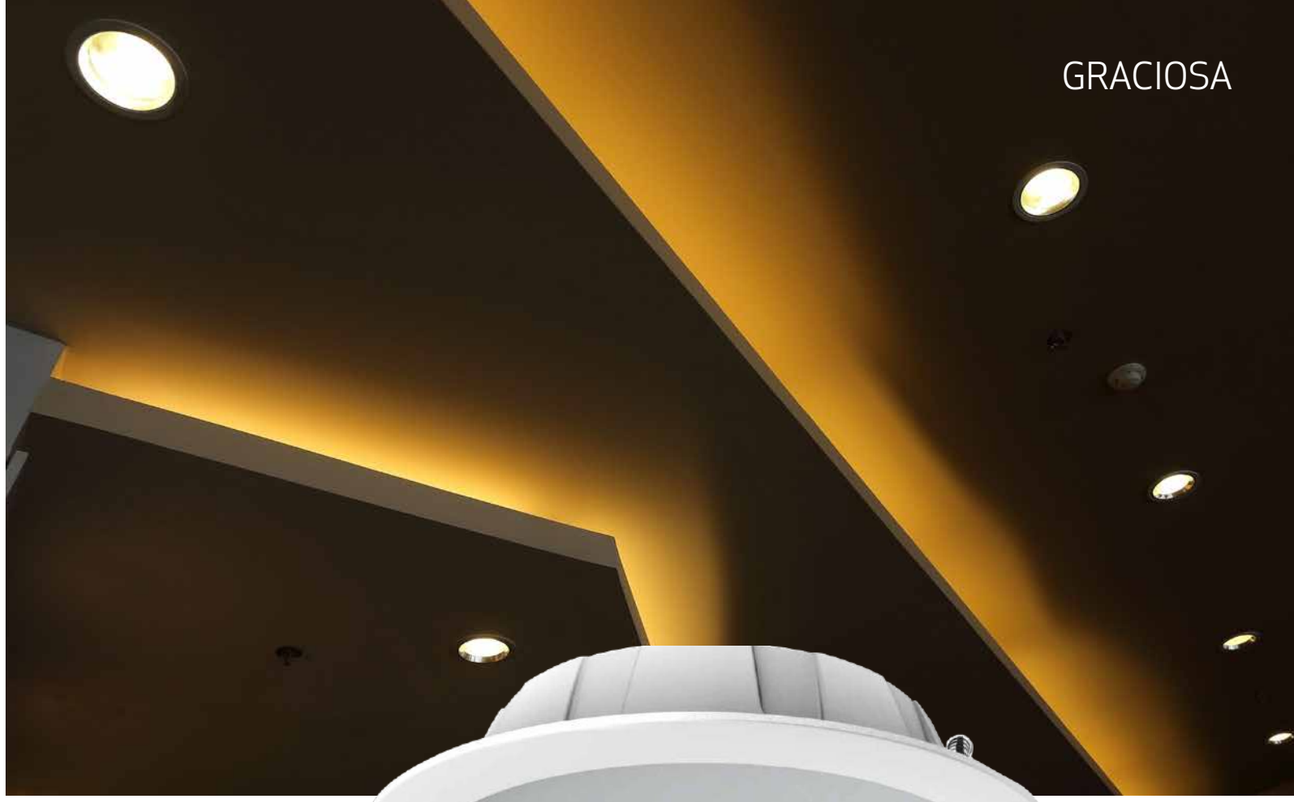



6390 Blanco-*White*
LED 24,5W 3000K 1900lm

6391 Blanco-*White*
LED 24,5W 4000K 2100lm

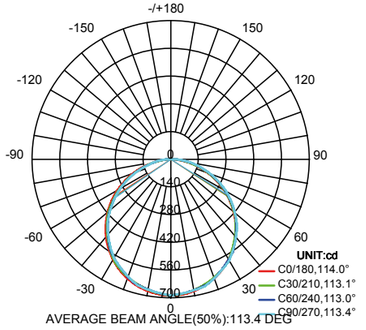

AVERAGE BEAM ANGLE(50%):113.4 DEG

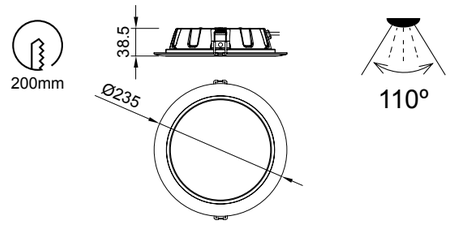

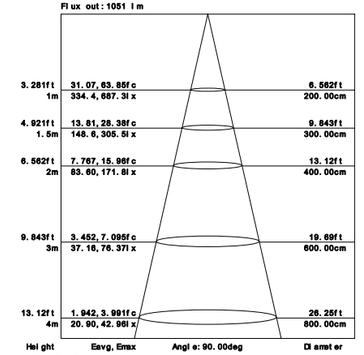

Note:The Curves indicate the illuminated area and the average illumination when the luminaire is at different distance.

ErP COMPLIANT


RoHS compliant

ATLANTIS

IP54

6405 Blanco mate-*Matt White*
1 × GU10





58mm

6406 Aluminio Plata-*Silver Aluminium*
1 × GU10



NOT INCLUDED

garantía mantiene.org 2 AÑOS WARRANTY GARANTÍA

IP54

Aluminio-Aluminium 100-240V~ 50/60Hz máx 12W LED

COMFORT IP

IP54

6810 Blanco Mate-*Matt White*
LED 1× GU10




6811 Negro Mate-*Matt Black*
LED 1× GU10


6812 Blanco Mate-*Matt White*
LED 1× GU10


6813 Negro Mate-*Matt Black*
LED 1× GU10












75mm



NOT INCLUDED

garantía mantiene.org 2 AÑOS WARRANTY GARANTÍA

IP54


Aluminio-*Aluminium* 100-240V~ 50/60Hz máx 12 W LED

TIRAS-*STRIPS*

Tira LED flexible para uso interior IP20
IP20 Flexible LED strip for indoor lighting





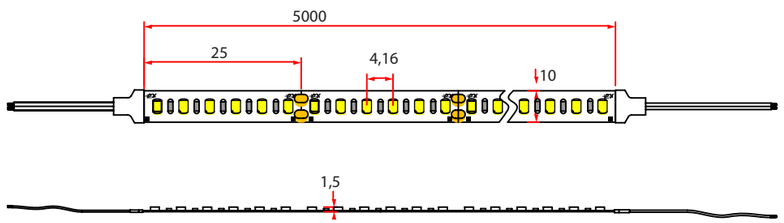

Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7366		2700	24	240	19,2	1400	73	≥ 90	< 3	10	25	6	5	20
7367		3000	24	240	19,2	1470	77	≥ 90	< 3	10	25	6	5	20
7368		4000	24	240	19,2	1540	80	≥ 90	< 3	10	25	6	5	20


24V CRI:≥ 90 tc<65º

TIRAS-*STRIPS*

Tira LED flexible para uso interior. IP20
IP20 Flexible LED strip for indoor use





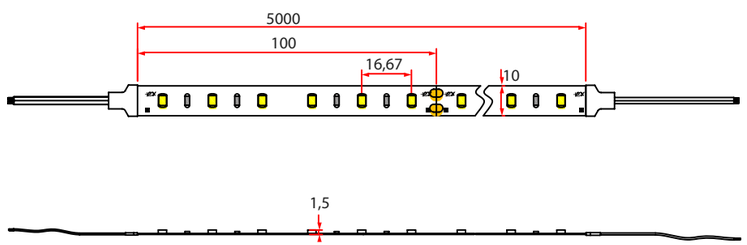

Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7360		2700	24	60	9,6	650	68	≥ 90	< 3	10	100	6	5	20
7361		3000	24	60	9,6	685	71	≥ 90	< 3	10	100	6	5	20
7362		4000	24	60	9,6	715	74	≥ 90	< 3	10	100	6	5	20

24V CRI:≥ 90 tc<65º

TIRAS-*STRIPS*


Tira LED flexible para uso interior. IP20


IP20 Flexible LED strip for indoor use











Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7363		2700	24	120	14,4	1010	70	≥ 90	< 3	8	50	6	5	20
7364		3000	24	120	14,4	1060	74	≥ 90	< 3	8	50	6	5	20
7365		4000	24	120	14,4	1110	77	≥ 90	< 3	8	50	6	5	20


24V CRI:≥ 90 tc<65°


TIRAS-*STRIPS*

Tira LED flexible para uso exterior IP65

IP65 Flexible LED strip for outdoor lighting



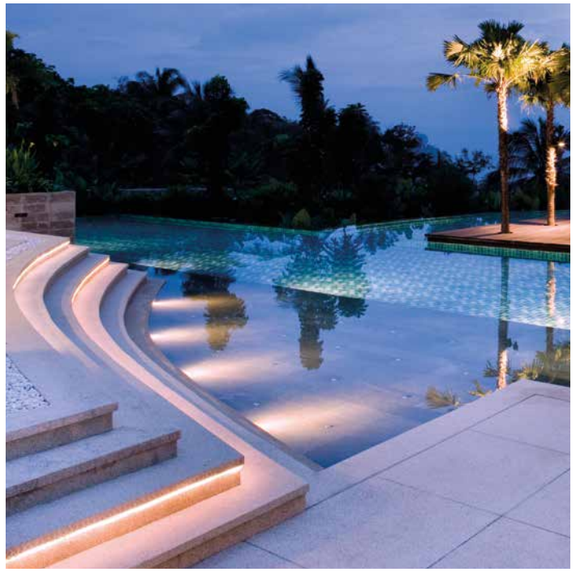

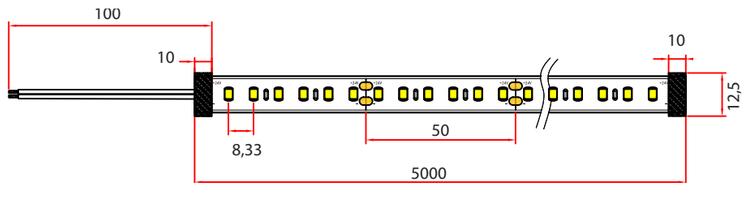

Características técnicas / Technical characteristics

Ref.	Color Colour	Color temp. Colour Tª	Tensión DC voltage DC	Ud. LED metro LED units meter	Potencia por metro Power meter	Eficiencia luminosa metro Luminous efficacy meter	Eficiencia luminosa vatio Luminous efficacy watt	CRI	SDCM	Ancho Wide	Corte Cut	Ud. LED corte LED units cut	Metros rollo Meters reel	Protección Protection
		K	V		W/m	lm/m*	lm/W			mm	mm	pcs	m	IP
7369		3000	24	120	14,4	950	66	≥ 90	< 3	10	50	6	5	65
7370		4000	24	120	14,4	995	69	≥ 90	< 3	10	50	6	5	65

Accesorios de corte IP no incluidos / IP Cutting accessories not included



7406 Conexión estanca DC/*Waterproof connection*



7404 Pegamento silicona/*Silicone glue*

7403 Final silicona con agujeros
Silicone end cap w/*holes*


7405 Final silicona/*Silicone End cap*

24V CRI:≥ 90 tc<65°

PERFILES-*PROFILES*

Perfil para tiras LED

Profile for LED strips

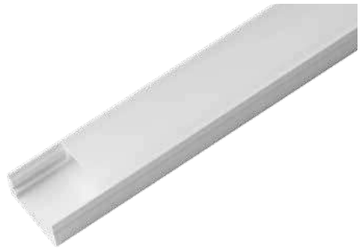

7381 Blanco-*White*

Piezas incluidas/*Included pieces*


2 m 

Perfil+difusor/Profile+diffuser

2 × **7384** 

2 × **7387** 

4 × **7391**





7382 Negro-*Black*

Piezas incluidas/*Included pieces*


2 m 

Perfil+difusor/Profile+diffuser


2 × **7385** 

2 × **7388** 


4 × **7391**



Tapa/End cap



Clip PC transparent



Clip aluminium



7383 Aluminio-*Aluminium*

Piezas incluidas/*Included pieces*

2 m 

Perfil+difusor/Profile+diffuser

2 × **7386** 

2 × **7389** 

4 × **7390** 

CE




Aluminio+PCB/*Aluminium+PCB*

PERFILES-*PROFILES*

Perfil para tiras LED

Profile for LED strips



7392 Blanco-*White*

Piezas incluidas/*Included pieces*


2 m 

Perfil+difusor/Profile+diffuser


2 × **7395** 

2 × **7398** 

4 × **7402**



Tapa/End cap



Clip PC transparent



7393 Negro-*Black*

Piezas incluidas/*Included pieces*


2 m 

Perfil+difusor/Profile+diffuser

2 × **7396** 

2 × **7399** 

4 × **7402**



Clip aluminium



7394 Aluminio-*Aluminium*

Piezas incluidas/*Included pieces*


2 m 

Perfil+difusor/Profile+diffuser

2 × **7397** 

2 × **7400** 

4 × **7401** 



CE





Aluminio+PCB/*Aluminium+PCB*

PERFILES-*PROFILES*


Perfiles Empotrables para tiras LED
Recessed Profile for LED strips



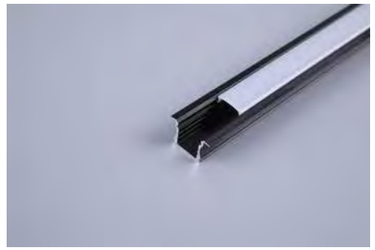


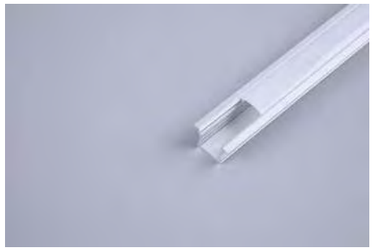


7407 Blanco-*White*	**7408** Negro-*Black*	**7409** Aluminio-*Aluminium*
Piezas incluidas/*Included pieces*	**Piezas incluidas**/*Included pieces*	**Piezas incluidas***Included pieces*
2 m 	2 m 	2 m 
Perfil+difusor/Profile+diffuser	**Perfil+difusor**/Profile+diffuser	**Perfil+difusor**/Profile+diffuser
2 × **7410** 	2 × **7411** 	2 × **7412** 
2 × **7413**	2 × **7414** 	2 × **7415** 
4 × **7416** 	4 × **7416** 	4 × **7416** 



Tapa/End cap



Clip aluminium

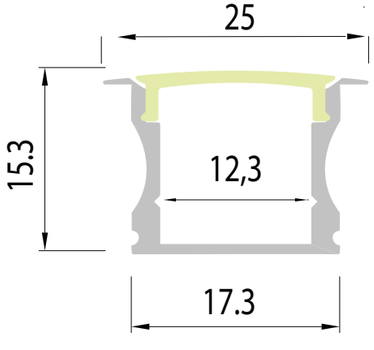


Aluminio+PCB/*Aluminium+PCB*

ALIMENTADORES-*DRIVERS*

Tension constante 24v IP67
IP67 24v Constant voltage


7378



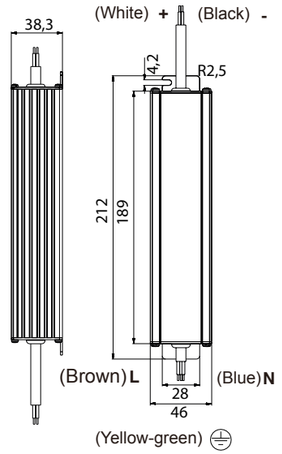


7379



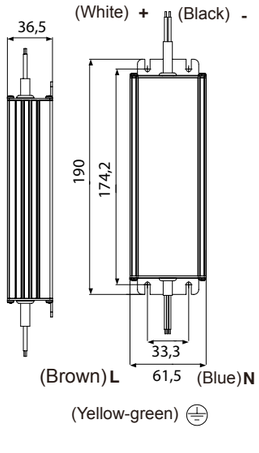

7380



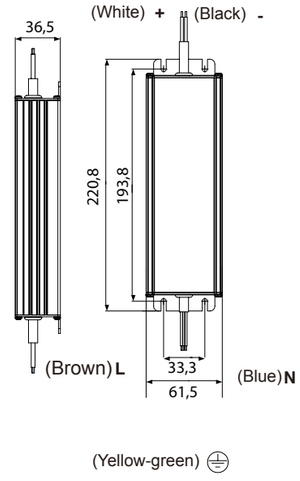

Características técnicas / Technical characteristics

Ref.	**Art.-No**	**Tensión nominal de entrada** Nominal input voltaje	**Rango de potencia en módulo** Output power range	**Tensión de salida DC** Output voltage DC	**Corriente de salida máxima** Maximum output current	**Factor de potencia** Power factor	**Frecuencia** Frequency	**Temp. máx envolvente** Max temp.at tc point	**Temp. funcionamiento** Operating temp.	**Protección** Protection
		Vac	**W**	**Vdc**	**A**	**λ**	**Hz**	**tc (ºC)**	**ta (ºC)**	**IP**
7378	**SPE100-24VLP**	**200-240V**	**0-100**	**24**	**4.17**	**≥ 0,95**	**50/60**	**90º**	**-20...+60º**	**67**
7379	**SPE150-24VLP**	**200-240V**	**0-150**	**24**	**6.25**	**≥ 0,95**	**50/60**	**90º**	**-20...+60º**	**67**
7380	**SPE200-24VLP**	**200-240V**	**0-200**	**24**	**8.33**	**≥ 0,95**	**50/60**	**90º**	**-20...+60º**	**67**

ALIMENTADORES-*DRIVERS*


Tension constante 24v


24v Constant voltage



7371









7372









7373









7374









7375





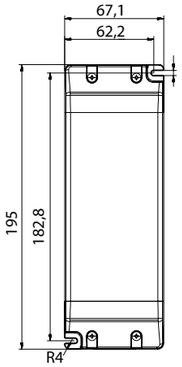

Características técnicas / Technical characteristics

Ref.	Art.-No	Tensión nominal de entrada Nominal input voltaje	Rango de potencia en módulo Output power range	Tensión de salida DC Output voltage DC	Corriente de salida máxima Maximum output current	Factor de potencia Power factor	Frecuencia Frequency	Temp. máx envolvente Max temp.at tc point	Temp. funcionamiento Operating temp.	Protección Protection
		Vac	W	Vdc	A	λ	Hz	tc (ºC)	ta (ºC)	IP
7371	SE30-24VL	200-240V	0-30	24	1.25	≥ 0,9	50/60	80º	-20...+45º	20
7372	SE60-24VL	200-240V	0-60	24	2.5	≥ 0,95	50/60	90º	-20...+45º	20
7373	SE100-24VL	220-240V	0-100	24	4.17	≥ 0,95	50/60	90º	-20...+45º	20
7374	SE150-24VL	220-240V	0-150	24	6.25	≥ 0,9	50/60	90º	-20...+45º	20
7375	SNP250-24VL	200-240V	0-250	24	10.4	≥ 0,95	50/60	90º	-20...+45º	20

ALIMENTADORES-*DRIVERS*


Tension constante 24v finos


24v Constant voltage slim



7376







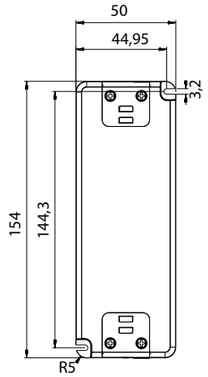

7377





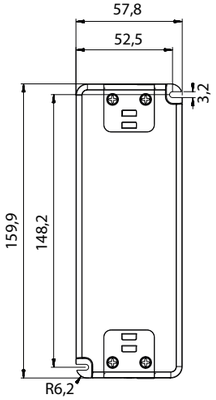

Características técnicas / Technical characteristics

Ref.	Art.-No	Tensión nominal de entrada Nominal input voltaje	Rango de potencia en módulo Output power range	Tensión de salida DC Output voltage DC	Corriente de salida máxima Maximum output current	Factor de potencia Power factor	Frecuencia Frequency	Temp. máx envolvente Max temp.at tc point	Temp. funcionamiento Operating temp.	Protección Protection
		Vac	W	Vdc	A	λ	Hz	tc (ºC)	ta (ºC)	IP
7376	SS30-24VF	220-240V	0-30	24	1.25	≥ 0,95	50/60	85º	-20...+45º	20
7377	SS60-24VF	200-240V	0-60	24	2.5	≥ 0,9	50/60	80º	-20...+50º	20

Controlador LED DIM-TW

DIM-TW LED Controller




El controlador PRO-DIMTW-C01 permite controlar la iluminación de una tira LED monocolor o de Blanco Dinámico (TW) desde un mando a distancia.

El controlador puede ser sincronizado con hasta 8 mandos a distancia simultáneamente. Cada mando a distancia puede controlar hasta 4 controladores diferentes de manera autónoma

PRO-DIMTW-C01 can control single colour (1CH) or Tunable White (2CH) LED Strips from an RF remote control.

The controller could be linked with up to 8 remotes at the same time. Each remote can control 4 controllers independently.

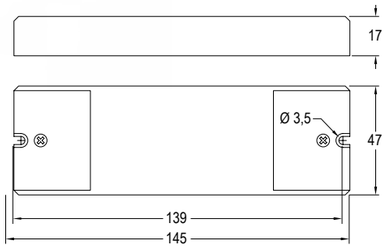

Accesorios / Accessories


Ref 9955911 PRO-DIM-R01



Esquema de conexión / Connection diagram

Ref.	Tensiones de entrada y salida Imput-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Tipo tira Led Led strip type	Control a través de Tipo Control made by
	V	mA	A	12V 24V		Mando a distancia RF
9955912	12-24	PWM	3 x 5A DIM 2x 5A TW	60W CH 120 W CH	Monocolor (1CH-DIM) TW (2CH)	RF Remote control

Modos de control y funcionamiento / Functions and control modes

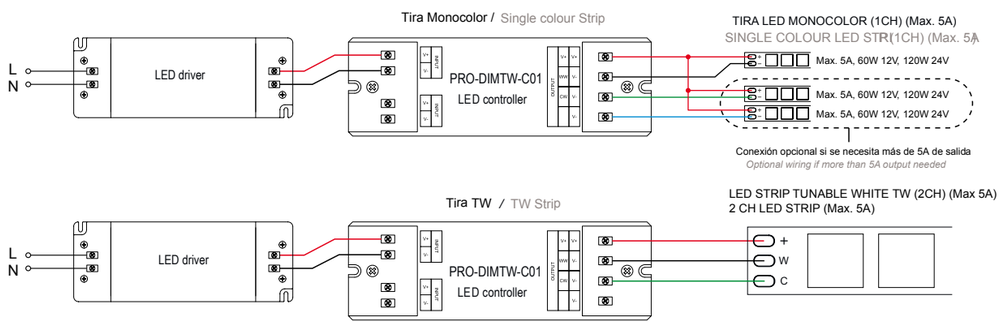

CE RF PWM DIM TW garantia.mantraco.org 3 YEAR WARRANTY GARANTÍA

Mando a distancia DIM Monocolor

DIM Single Colour remote control



El mando PRO-DIM-R01 puede controlar hasta un máximo de 20 receptores.

Permite regular la intensidad de la luz.

Permite controlar hasta 4 zonas independientes.

Cada zona puede ser de uno o más controladores

Permite programar 2 escenas en memoria.


The PRO-DIM-R01 remote control can control a maximum of 20 receivers.

Allows regulation of lighting intensity.

Can control up to 4 independent zones.

Each zone can be with one or more controllers.

Can program 2 saving scenes.




Accesorios / Accessories

Ref 9955912 PRO-DIMTW-C01



Características técnicas / Technical characteristics


Ref.	Alimentación Power	Frecuencia de operación Operation frecuency	Tipo de tira LED LED strip type	Alcance máx. interior (Sin paredes) Max. Range (Without walls)	Compatible con Compatible with
		Mhz		m	
9955911	3xAAA/LR03 1,5V batteries/ pilas	434/869	TW (2CH) DIM / monocolor (1CH)	20	SPU-DIM-C01

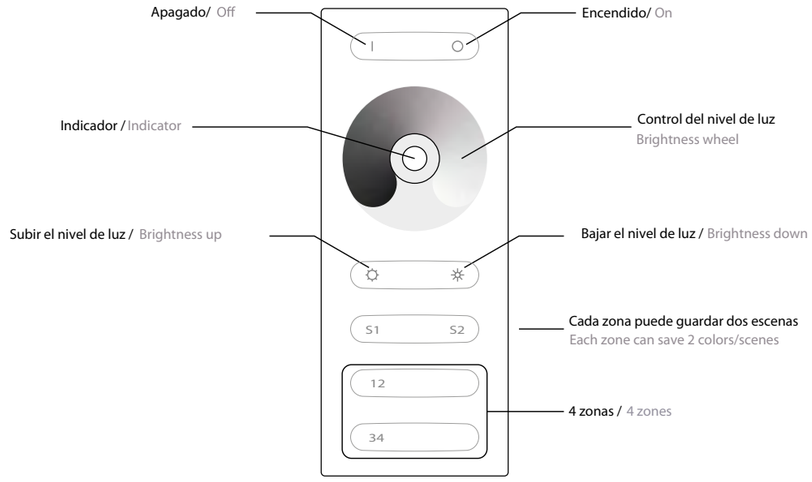

CE RF PWM DIM garantia.mantraco.org 3 YEAR WARRANTY GARANTÍA

Controlador LED para pulsadores estándar y/o mando a distancia

LED Controller for standard push switch and/or remote control

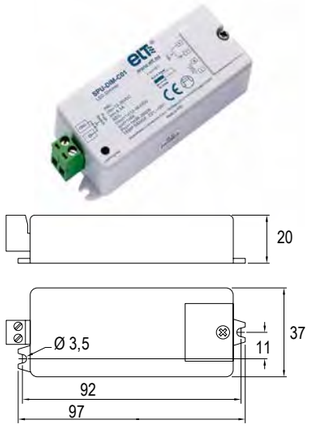

El controlador SPU-DIM-C01 permite controlar la iluminación de una tira LED monocolor desde un pulsador estándar de cualquier fabricante. Pueden controlarse las tiras LED manteniendo la misma familia de mecanismos que en el resto de la instalación en la que se integre.

También puede controlarse con los mecanismos RF SPU. Son mecanismos sin cables de instalación muy sencilla, pegar o atornillar y que funcionan con pila de 3 años de duración. Permite controlar los LEDs fijando el mecanismo en cualquier superficie.

El controlador puede ser gobernado por varios pulsadores (ver esquema de conexión) y hasta 8 mecanismos RF SPU a la vez. Puede funcionar con los dos sistemas de control de manera simultánea (pulsador conectado por cable y mecanismos RF) o sólo con uno de ellos.

STO-DIM-C01 can control single colour LED strips from a standard push switch from any manufacturer. LED strips can be controlled keeping the same kind of switches as the rest of the installation.

It can also be controlled with the RF SPU switches. These switches are wireless, work with a 3-year-life battery and are very easy to install: just screw or stick in any surface.


Controller can be managed by several push switches (see wiring diagram) and up to 8 RF SPU switches at the same time. It can work with two control systems (standard switches or RF switches) simultaneously or only with one of them.

Características técnicas / Technical characteristics


Ref.	Tensiones de entrada y salida Imput-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Tipo tira Led Led strip type	Control a través de Tipo Control made by
	V	mA	A	12V 24V 36V		Pulsador standard y/o mecanismo RF
9955901	12-24-36	PWM	1×8	96 W 192 W 288 W	MONOC. DIM (1CH)	Standard push switch and/or RF Switch

Modos de control y funcionamiento / Functions and control modes


1. Con uno o varios pulsadores estándar
With one or more standar push switches

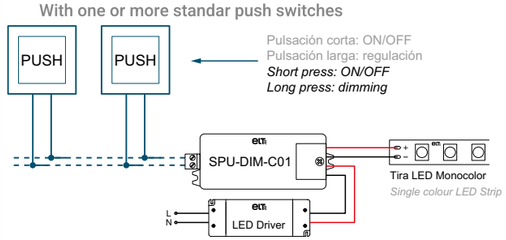


2. Con Mecanismos RF / With RF Switches

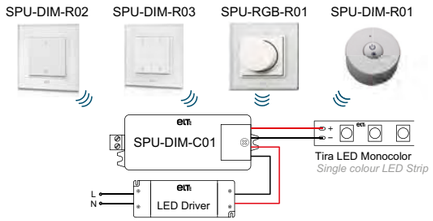

3. Pulsadores + Mecanismos RF
Push Switches + RF Switches

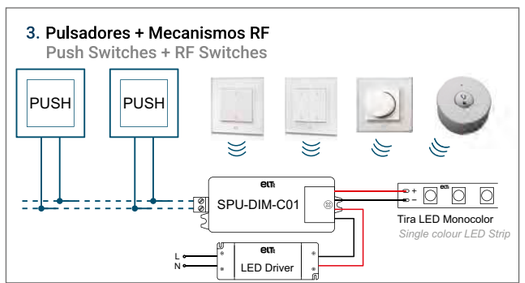

4. Functions / Funcionamiento

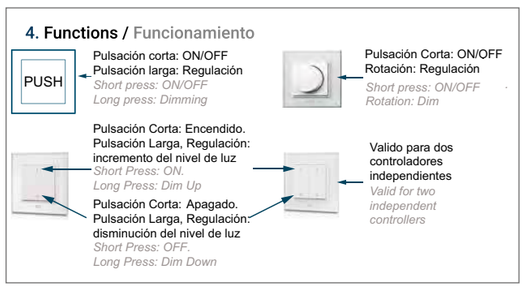

PUSH CE RF PWM DIM garantia.manrraco.org 3 YEAR WARRANTY GARANTIA

Mecanismo RF

RF Switch PUSH SYSTEM




Mecanismo RF pequeño y versátil que permite encender, apagar y regular una instalación de tira LED monocolor.

Puede ser fijado a una pared mediante tornillos o pegado (cinta de doble cara incluida). También lleva un imán para fijarse con facilidad en superficies metálicas.

Su reducido tamaño permite que pueda ser llevado en un bolsillo como mando a distancia. Está alimentado por una pila de tipo CR2025 de larga duración.

Fijación: Tornillos / iman.

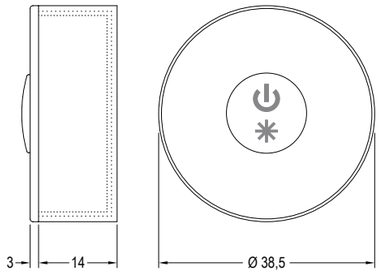

Small and versatile RF switch which allows to swicth ON/OFF and dim a single colour LED strip.

Can be easily fixed to a wall with screws or sticked (double side tape included). Also comes with a small magnet to be fixed easily on metalic surfaces.

Its small size allows to take it in a pocket as a remote control. It ´s powered with a long life CR2025 battery.

Fixing: Screw / magnet.

Controlador compatible /
Controller compatible with

Ref 9955901 SPU-DIM-C01



Características técnicas / Technical characteristics

Ref.	Alimentación Power	Frecuencia de operación Operation frecuency	Tipo de tira LED LED strip type	Alcance máx. interior (Sin paredes) Max. Range (Without walls)	Compatible con Compatible with
		Mhz		m	
9955905	CR2025 3V battery / pila	434/869	DIM (1CH)	30	SPU-DIM-C01


Características técnicas / Technical characteristics

1. Funcionamiento / Functions


Pulsación corta: ON/OFF
Pulsación larga: regulación
Short press: ON/OFF
Long press: dimming



2. Fijación / Fixing



3. Sincronización del controlador / Match to controller

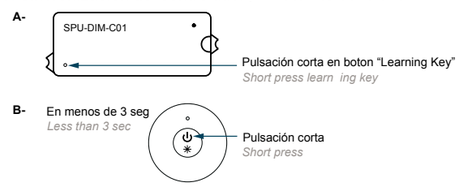

PUSH CE RF PWM DIM garantia.manrraco.org 3 YEAR WARRANTY GARANTIA


DAL-MULTI-C02

12-36V DC

Digital dimmer, 1 dirección digital, 4 canales

Digital dimmer, 1 digital address, 4 channels





Permite la regulación de tiras LED desde cualquier sistema de control compatible con protocolo DALI. Sólo necesita conexión al bus DALI y asignar al controlador la dirección DALI desde la que se hará el control de las tiras.

Control de tiras LED monocolor.

Incluye pantalla y botones para ver y asignar fácilmente la dirección DALI.

El mismo modelo es válido para pilotar de 1 a 4 canales de forma síncronizada. Cada canal de salida tiene una capacidad de 5A.

0-100% rango de regulación según curva.

This device allows to control LED strips from any control system compatible with DALI protocol. Only needs a connexion to the DALI bus and assign the device the DALI address to control the strips.

Control of LED single colour strips.

Includes screen and buttons to see and assign easily the DALI address.


The same model works from 1 to 4 channel synchronously. Each channel has a current output of 5A

0-100% dimming range via logarithmic curve.

Características técnicas / Technical characteristics

Ref.	Tensiones de entrada y salida Imput-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Tipo tira Led Led strip type	Control a través de Tipo Control made by
	Vdc	mA	A	12V 24V 36V		
9955921	12-24-36	PWM	4 ch × 5A	240 W 480 W 720 W (4 × 60) (4 × 120) (4 × 180)	DIM	DALI

Esquema de conexión / Connection diagram

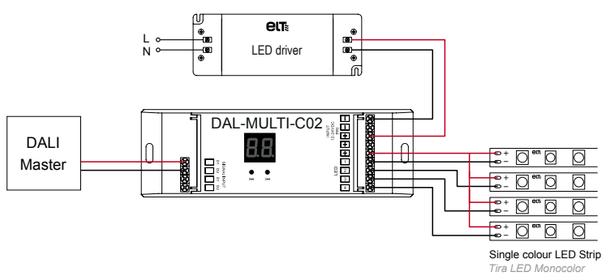


EBLUE MULTI4

Controlador LED para pulsadores estándar y/o mando a distancia

LED Controller for standard push switch and/or remote control



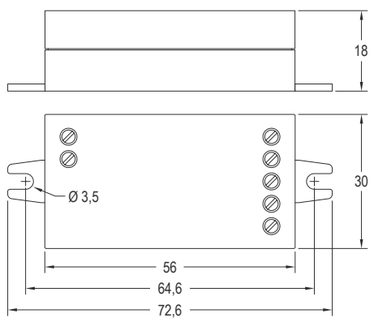

eBLUE MULTI4 es un regulador PWM de cuatro canales controlable por Bluetooth para cargas LED de tensión constante, tales como tiras y módulos LED de tensión constante.

eBLUE MULTI4 puede controlar hasta cuatro canales. La corriente de salida máxima es 6A, la cual puede ser dividida libremente entre 1-4 canales.

Dimensiones muy reducidas para su instalación.

Protegido contra sobrevoltages, sobre corriente y cortocircuitos.

Controlable de forma inalámbrica a través de un dispositivo inteligente (smartphones / tablets,) Visual e intuitiva app para smartphones / tablets. Disponible gratuitamente en Apple Store / Google Play. app CASAMBI

Forma automáticamente una rápida y segura red inalámbrica de malla con otras unidades eBLUE (hasta 127 unid / red).

Permite una programación horaria de escenas. Servicio en la nube.

El firmware del dispositivo puede ser actualizado en funcionamiento de manera inalámbrica. Sección máxima en clemas 0,75-1,5 mm2.

BLUE MULTI4 is a Bluetooth controllable four channel PWM dimmer for constant voltage LED loads, such as LED strips and constant voltage LED modules.

eBLUE MULTI4 can control up to four channels. The maximum combined output current 6A which can be freely divided between 1-4 CH.

Very small size for easy installation.

Protected against overvoltage, overcurrent and short circuit situations.

Wirelessly controllable with a smart device (smartphone, tablet,)
Intuitive and visual app for smartphones / tablets. Available for free on Apple Store / Google Play. CASAMBI

Forms automatically a fast and secure wireless mesh network with other eBLUE devices (up to 127 units / network).


Use timers to turn on and off scene at predefined times.

Cloud service that enhances user experience. Device firmware can be updated over the air. Max terminal section 0.75-1.5 mm2

Características técnicas / Technical characteristics

Ref.	Tensiones de entrada y salida Imput-output Voltage	Tipo de regulación Control signal	Intensidad máx. de salida Max output current	Potencia máx. de salida Max output powewr	Temp. máx envolvente Max. temp at tc point	Temp. funcionamiento Operatin temp.	Control a través de Tipo Control made by
	Vdc	mA	A	12V 24V	tc (º)	ta (º)	
9953074	12-24	PWM	6	72 W 144 W	+75	-20...+45	DIM, TW, RGB, RGBW

Esquema de conexión / Connection diagram

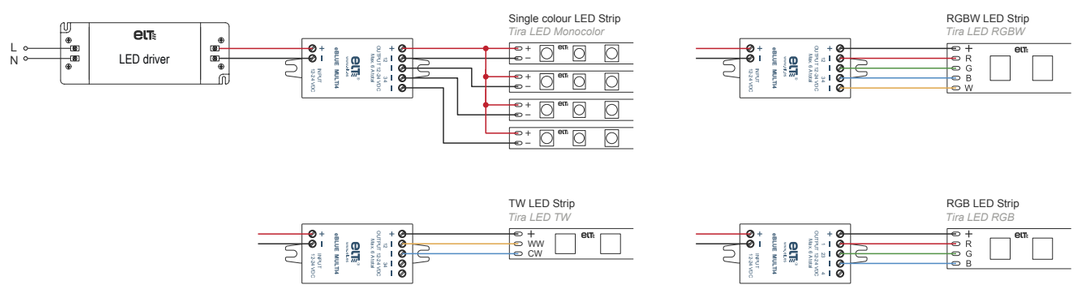


URANO 150W 4000K

Campanas Led
Ufo bays Led




7420 Negro-*Black*
LED 150W **60º** 21000lm



60º

Luminous Intensity Distribution Curve



Average Diffuse Angle(50%): 60.4°


C0-C180 C90-C270 G6

Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	18211.43	1.17	1.16	4823.74
2.0	4552.86	2.34	2.32	1205.93
3.0	2023.49	3.50	3.49	535.97
4.0	1138.21	4.67	4.65	301.48
5.0	728.46	5.84	5.81	192.95
6.0	505.87	7.01	6.97	133.99
7.0	371.66	8.18	8.13	98.44
8.0	284.55	9.34	9.29	75.37
9.0	224.83	10.51	10.46	59.55
10.0	182.11	11.68	11.62	48.24


Beam Angle: H60.6 V60.3 Field Angle: H104.6 V105.0

7421 Negro-*Black*
LED 150W **90º** 21000lm



90º

Luminous Intensity Distribution Curve



Average Diffuse Angle(50%): 88.4°


C0-C180 C90-C270 G28

Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	10082.49	1.96	1.92	3581.33
2.0	2520.62	3.93	3.85	895.33
3.0	1120.28	5.89	5.77	397.93
4.0	630.16	7.85	7.70	223.83
5.0	403.30	9.82	9.62	143.25
6.0	280.07	11.78	11.55	99.48
7.0	205.77	13.74	13.47	73.09
8.0	157.54	15.71	15.40	55.96
9.0	124.48	17.67	17.32	44.21
10.0	100.82	19.63	19.25	35.81


Beam Angle: H88.9 V87.8 Field Angle: H123.7 V124.0

7422 Negro-*Black*
LED 150W **120º** 21000lm



120º

Luminous Intensity Distribution Curve



Average Diffuse Angle(50%): 112.0°

C0-C180 C90-C270 G0

Illuminance at a Distance


Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	8061.23	2.99	2.94	2151.03
2.0	2015.31	5.98	5.88	537.76
3.0	895.69	8.96	8.83	239.00
4.0	503.83	11.95	11.77	134.44
5.0	322.45	14.94	14.71	86.04
6.0	223.92	17.93	17.65	59.75
7.0	164.51	20.91	20.59	43.90
8.0	125.96	23.90	23.54	33.61
9.0	99.52	26.89	26.48	26.56
10.0	80.61	29.88	29.42	21.51


Beam Angle: H112.4 V111.6 Field Angle: H144.9 V144.6


LED life / LED vida 50.000 h · ON / OFF 30.000 · LED INCLUDED · garantia.mantrasco.com 5 YEAR WARRANTY GARANTIA LED · 60° 90° 120° · IP65 · DRIVER TÜV

Aluminio-*Aluminium* **180-260V~ 50/60Hz** CRI≥80





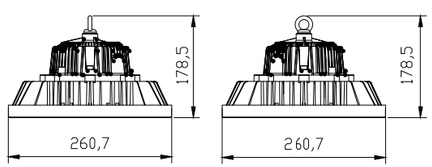
















URANO 150W 5000K

Campanas Led
Ufo bays Led






7423 Negro-*Black*
LED 150W **60º** 22500lm



60º

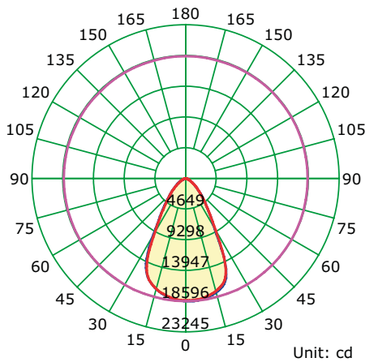

Unit: cd


Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	18575.60	1.15	1.15	4836.52
2.0	4643.90	2.31	2.31	1209.13
3.0	2063.96	3.46	3.46	537.39
4.0	1160.97	4.62	4.61	302.28
5.0	743.02	5.77	5.76	193.46
6.0	515.99	6.93	6.92	134.35
7.0	379.09	8.08	8.07	98.70
8.0	290.24	9.24	9.22	75.57
9.0	229.33	10.39	10.37	59.71
10.0	185.76	11.55	11.53	48.37


Dh
Dv

Beam Angle: H60.0 V59.9 Field Angle: H104.9 V104.9

7424 Negro-*Black*
LED 150W **90º** 22500lm



90º

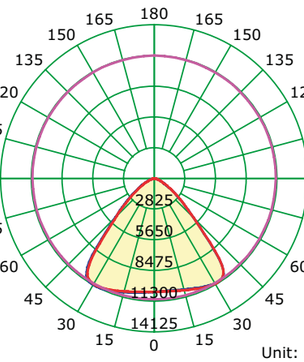

Unit: cd


Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	10446.65	1.93	1.91	3738.49
2.0	2611.66	3.86	3.82	934.62
3.0	1160.74	5.78	5.74	415.39
4.0	652.92	7.71	7.65	233.66
5.0	417.87	9.64	9.56	149.54
6.0	290.18	11.57	11.47	103.85
7.0	213.20	13.49	13.38	76.30
8.0	163.23	15.42	15.29	58.41
9.0	128.97	17.35	17.21	46.15
10.0	104.47	19.28	19.12	37.38


Dh
Dv

Beam Angle: H87.9 V87.4 Field Angle: H124.4 V123.5

7425 Negro-*Black*
LED 150W **120º** 22500lm



120º

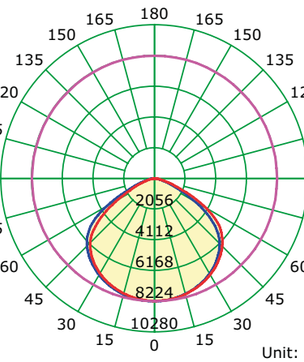


Unit: cd


Illuminance at a Distance


Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	8223.57	3.15	3.14	2207.84
2.0	2055.89	6.29	6.28	551.96
3.0	913.73	9.44	9.42	245.32
4.0	513.97	12.59	12.56	137.99
5.0	328.94	15.74	15.69	88.31
6.0	228.43	18.88	18.83	61.33
7.0	167.83	22.03	21.97	45.06
8.0	128.49	25.18	25.11	34.50
9.0	101.53	28.32	28.25	27.26
10.0	82.24	31.47	31.39	22.08

Dh
Dv

Beam Angle: H115.1 V115.0 Field Angle: H145.5 V145.4



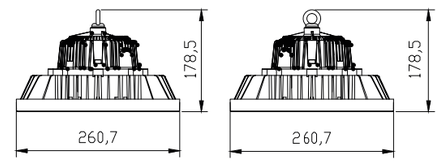















CE · LED life / LED vida 50.000 h · ON / OFF 30.000 · LED INCLUDED · garantia mantracc.org 5 year warranty GARANTIA LED · 60° · 90° · 120° · IP65 · DRIVER TÜV


Aluminio-*Aluminium* **180-260V~ 50/60Hz** CRI≥80

URANO 200W 4000K

Campanas Led
Ufo bays Led




7426 Negro-*Black*
LED 200W **60º** 28000lm



60°

Luminous Intensity Distribution Curve



Unit: cd

Average Diffuse Angle(50%): 42.0°

C0-C180 C90-C270 G1


Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	35265.56	0.77	0.76	6883.24
2.0	8816.39	1.54	1.53	1720.81
3.0	3918.40	2.31	2.29	764.80
4.0	2204.10	3.08	3.06	430.20
5.0	1410.62	3.85	3.82	275.33
6.0	979.60	4.62	4.59	191.20
7.0	719.71	5.39	5.35	140.47
8.0	551.02	6.16	6.12	107.55
9.0	435.38	6.93	6.88	84.98
10.0	352.66	7.70	7.65	68.83

Dh
Dv


Beam Angle: H42.1 V41.9 Field Angle: H93.8 V93.2

7427 Negro-*Black*
LED 200W **90º** 28000lm



90°

Luminous Intensity Distribution Curve



Unit: cd

Average Diffuse Angle(50%): 82.8°

C0-C180 C90-C270 G20


Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	14353.73	1.79	1.74	4883.51
2.0	3588.43	3.57	3.48	1220.88
3.0	1594.86	5.36	5.21	542.61
4.0	897.11	7.15	6.95	305.22
5.0	574.15	8.93	8.69	195.34
6.0	398.71	10.72	10.43	135.65
7.0	292.93	12.50	12.16	99.66
8.0	224.28	14.29	13.90	76.30
9.0	177.21	16.08	15.64	60.29
10.0	143.54	17.86	17.38	48.84

Dh
Dv


Beam Angle: H83.5 V82.0 Field Angle: H122.0 V123.2

7428 Negro-*Black*
LED 200W **120º** 28000lm



120°

Luminous Intensity Distribution Curve



Unit: cd

Average Diffuse Angle(50%): 112.9°


C0-C180 C90-C270 G0


Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	10952.78	3.03	3.00	2934.28
2.0	2738.20	6.06	6.01	733.57
3.0	1216.98	9.10	9.01	326.03
4.0	684.55	12.13	12.02	183.39
5.0	438.11	15.16	15.02	117.37
6.0	304.24	18.19	18.03	81.51
7.0	223.53	21.22	21.03	59.88
8.0	171.14	24.26	24.04	45.85
9.0	135.22	27.29	27.04	36.23
10.0	109.53	30.32	30.05	29.34


Dh
Dv

Beam Angle: H113.2 V112.7 Field Angle: H145.3 V145.1

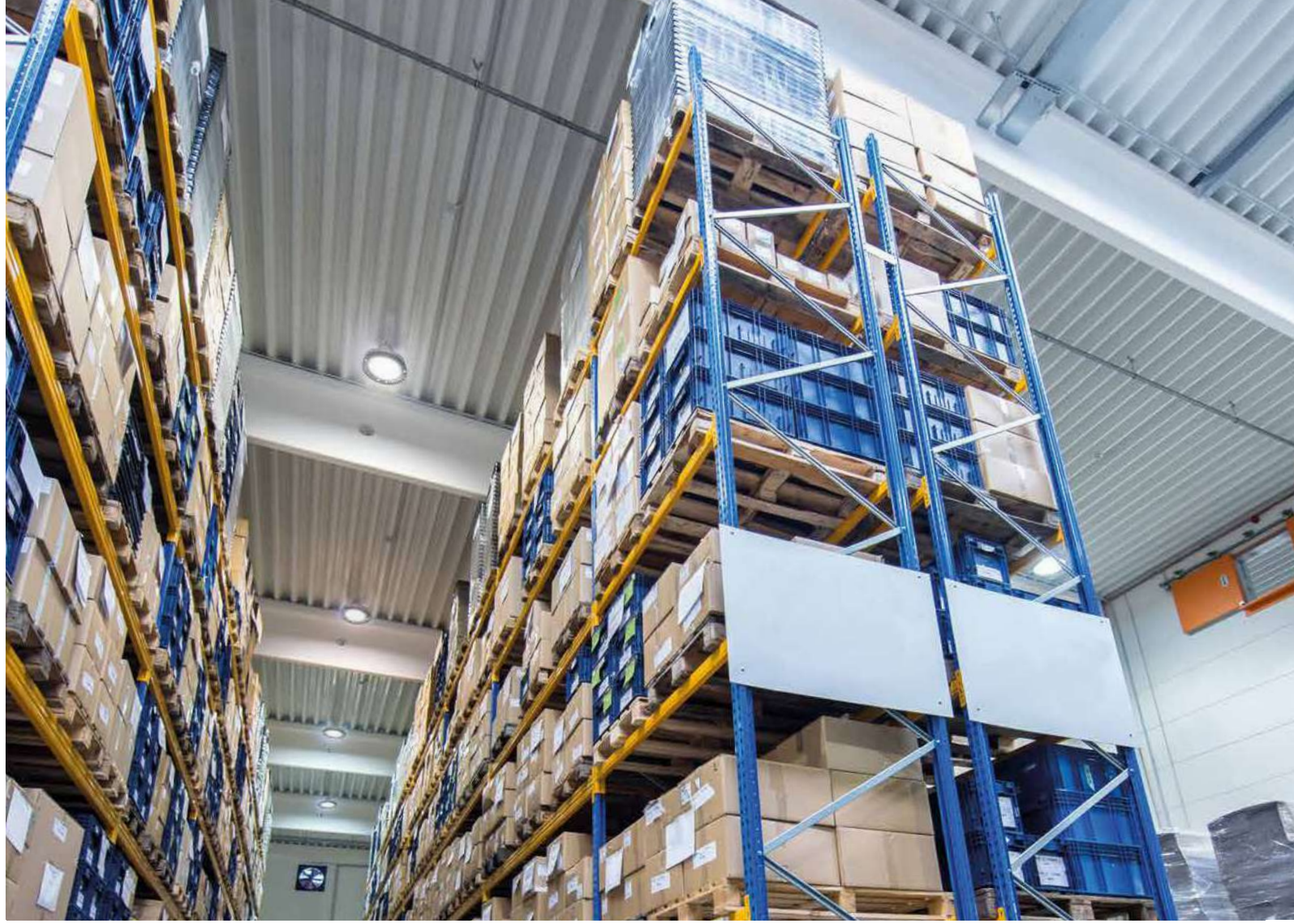












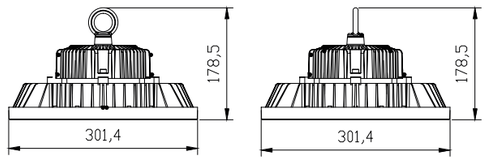










Aluminio-*Aluminium* **180-260V~ 50/60Hz** CRI≥ 80

URANO 200W 5000K

Campanas Led
Ufo bays Led




7429 Negro-*Black*
LED 200W **60º** 30000lm



60°

Luminous Intensity Distribution Curve



Average Diffuse Angle(50%): 56.8°


C0-C180 C90-C270 G5

Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	27241.54	1.08	1.08	6778.76
2.0	6810.38	2.16	2.16	1694.69
3.0	3026.84	3.24	3.25	753.20
4.0	1702.60	4.32	4.33	423.67
5.0	1089.66	5.40	5.41	271.15
6.0	756.71	6.48	6.49	188.30
7.0	555.95	7.56	7.57	138.34
8.0	425.65	8.64	8.66	105.92
9.0	336.32	9.72	9.74	83.69
10.0	272.42	10.80	10.82	67.79


Beam Angle: H56.7 V56.8 Field Angle: H103.5 V103.1

7430 Negro-*Black*
LED 200W **90º** 30000lm



90°

Luminous Intensity Distribution Curve



Average Diffuse Angle(50%): 88.1°


C0-C180 C90-C270 G31

Illuminance at a Distance

Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	14193.25	1.93	1.94	5055.11
2.0	3548.31	3.86	3.88	1263.78
3.0	1577.03	5.78	5.83	561.68
4.0	887.08	7.71	7.77	315.94
5.0	567.73	9.64	9.71	202.20
6.0	394.26	11.57	11.65	140.42
7.0	289.66	13.50	13.59	103.17
8.0	221.77	15.43	15.54	78.99
9.0	175.23	17.35	17.48	62.41
10.0	141.93	19.28	19.42	50.55


Beam Angle: H87.9 V88.3 Field Angle: H124.4 V124.1

7431 Negro-*Black*
LED 200W **120º** 30000lm



120°

Luminous Intensity Distribution Curve



Average Diffuse Angle(50%): 116.1°

C0-C180 C90-C270 G1


Illuminance at a Distance


Distance(m)	E(lx)	Dh(m)	Dv(m)	Eav(lx)
1.0	11070.06	3.22	3.19	2976.84
2.0	2767.51	6.44	6.38	744.21
3.0	1230.01	9.67	9.57	330.76
4.0	691.88	12.89	12.76	186.05
5.0	442.80	16.11	15.95	119.07
6.0	307.50	19.33	19.14	82.69
7.0	225.92	22.56	22.33	60.75
8.0	172.97	25.78	25.53	46.51
9.0	136.67	29.00	28.72	36.75
10.0	110.70	32.22	31.91	29.77


Beam Angle: H116.3 V115.8 Field Angle: H145.8 V145.7




Aluminio-*Aluminium* **180-260V~ 50/60Hz** CRI≥80

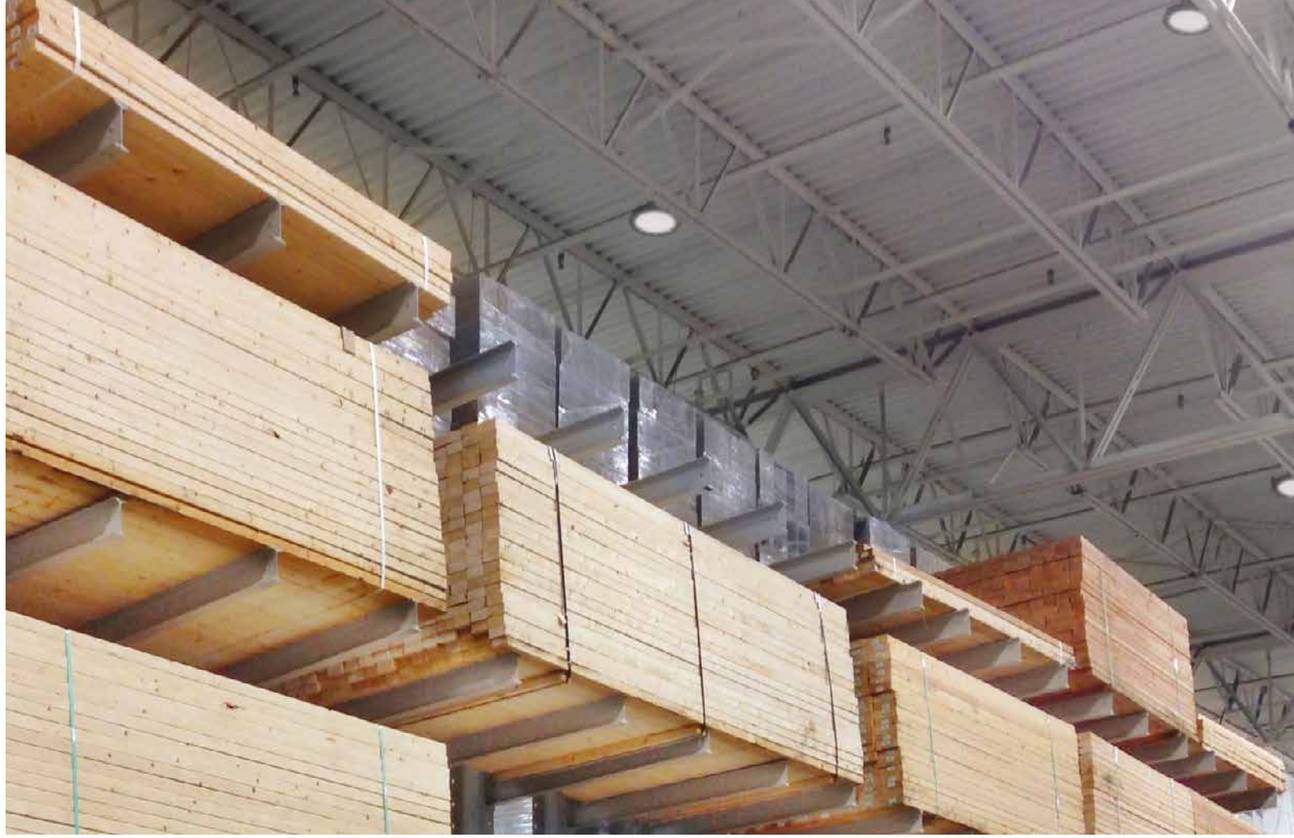



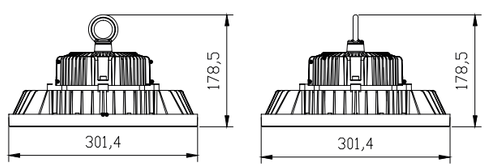















Aplique exterior-*Outdoor wall lamp*

CYCLE

JW Design


IP65


6850 Gris + madera-*Grey + wood*
LED 10W 800lm



6851 Gris + madera-*Grey + wood*
LED 12W 960lm



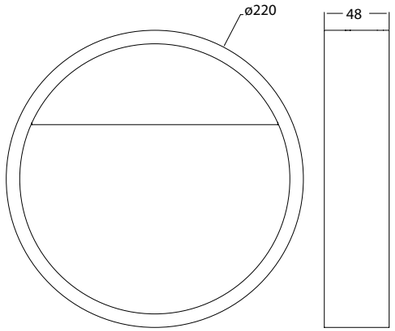

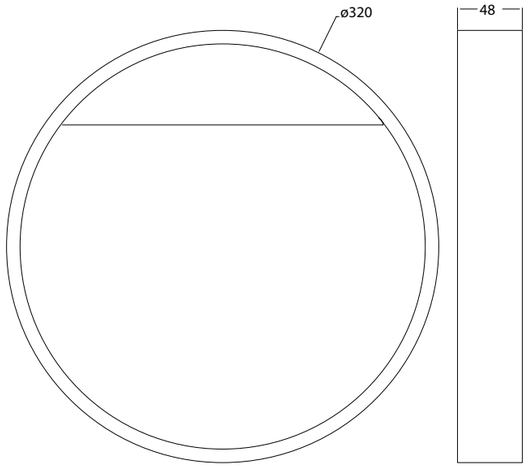

LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantraco.com 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP65

Aluminio-*Aluminium* 110-240V~ 50/60Hz CRI ≥80



POLINESIA


Santiago Sevillano

Aplique exterior-*Outdoor wall lamp*

7133 Beige oscuro-Dark *beige*

1L x E27 (no incl.)



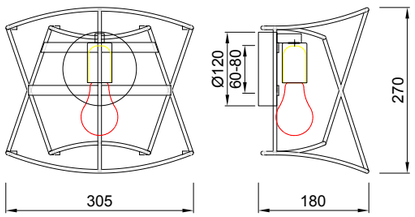



7138
pág. 390



7134
pág. 368



7131
pág. 414


garantía mantenida por 2 YEAR AGED WARRANTY GARANTÍA

NOT INCLUDED

IP44

Aluminio/fibra textil sintética-*Aluminium/synthetic textile fibre*

100-240V~ 50/60Hz E27 máx.20W Led

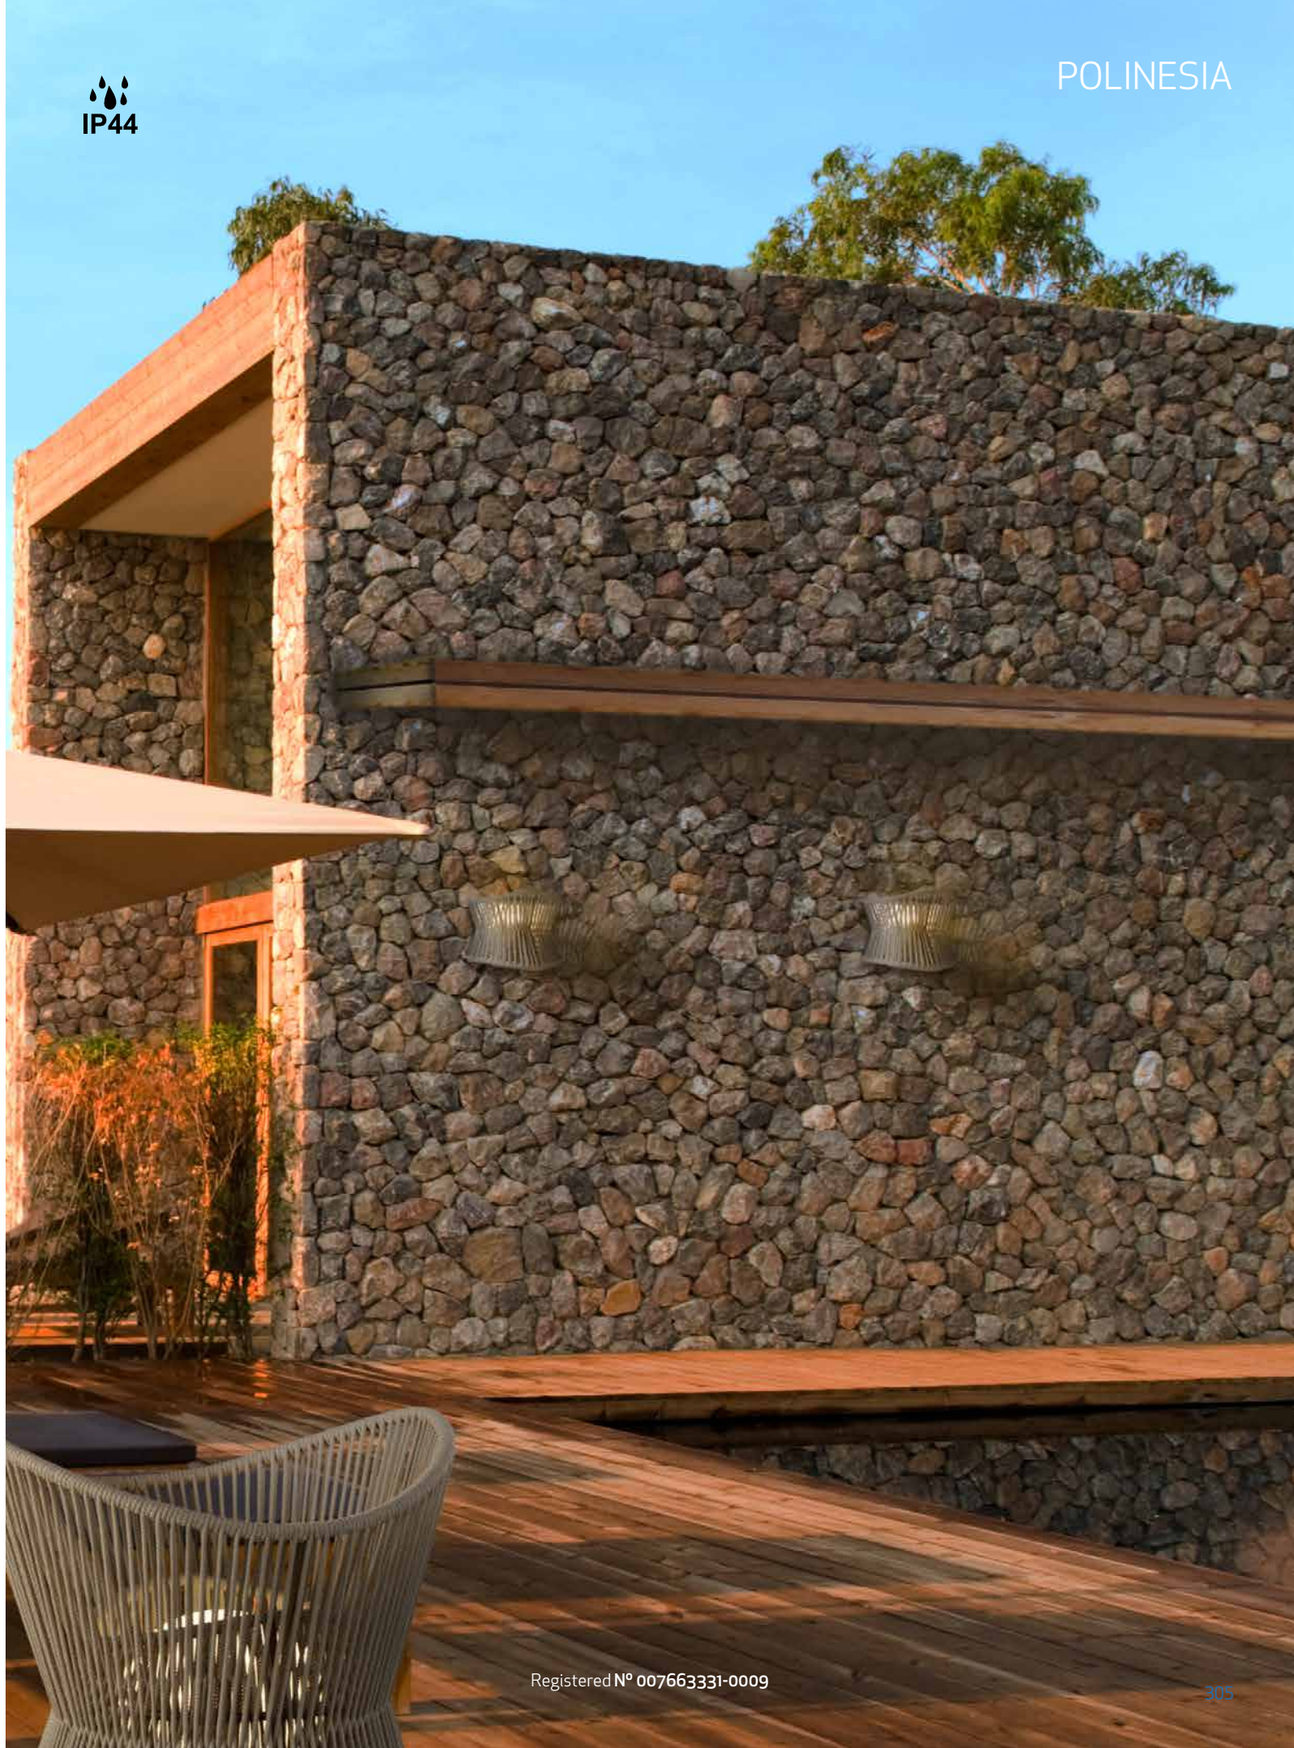

Registered **Nº 007663331-0009**

Aplique exterior-Wall light outdoor


MAYA

José Ignacio Ballester



6551 Gris oscuro-*Dark grey*


1L×E27





6552 Gris oscuro-*Dark grey*

1L×E27





6550 pág. 258

6555 pág. 284

6553 pág. 270

garantía manufacturer 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP54

Aluminio/cristal -*Aluminium/glass* 100-240V ~ 50/60Hz máx. 20W LED

OAMI 005818614-0005

MAYA


José Ignacio Ballester

RUKA

IP54

6774
Gris Oscuro/Madera-*Dark Grey/Wood*
LED 15W **3000K** 1120lm-Sensor








- Lux +



- Time +



Only Night


Day & Night

5 Seconds 10 Minutes

IP65

6770
Gris Oscuro/Madera-*Dark Grey/Wood*
LED 13W **3000K** 980lm







6771
pág. 266

LED life / LED vida 30.000 h

ON / OFF 10.000

garantía mantenga.com 5 años WARRANTY GARANTÍA LED

LED INCLUDED

Aluminio/PC-Aluminium/PC 100-240V~ 50/60Hz CRI:≥ 80



ErP COMPLIANT


DRIVER TÜV

RoHS compliant

MERIBEL




6495 Grafito-*Graphite*
1L×E27





6494 Grafito-*Graphite*
1L×E27





6490
pág. 310

garantia.mantenco.org 3 YEAR AND/O WARRANTY GARANTIA

NOT INCLUDED

IP54

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx. 20W LED


IP54

6495

Aplique exterior-Wall light outdoor




6492 Grafito-*Graphite*
2L×E27



6493 Grafito-*Graphite*
2L×E27







6490
pág. 402

garantía mantenga.org 3 YEAR AÑOS WARRANTY GARANTÍA · NOT INCLUDED · IP54

Aluminio/cristal-Aluminium/glass 100-240V ~ 50/60Hz máx. 20W LED


IP54

6492



6508 Blanco-*White*

1L×E27

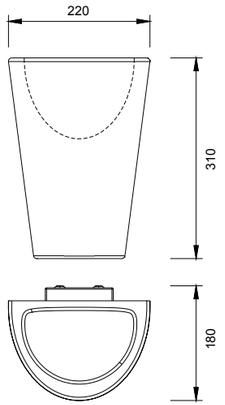







garantia.mantenco.org 2 YEAR AÑOS WARRANTY GARANTÍA

NOT INCLUDED

IP54

Polietileno-*Polyethylene* 100-240V ~ 50/60Hz máx. 20 W LED


OAMI 005818614-0007

VOLCANO

Aplique exterior-Wall light outdoor


6482 Grafito-*Graphite*
2L×E27





6483 Grafito-*Graphite*
1L×E27







Aluminio/cristal-Aluminium/glass 100-240V ~ 50/60Hz máx. 20 W LED




6482

6558 Gris oscuro-*Dark grey*
1L×GX53



6559 Blanco-*White*
1L×GX53








Bombillas Recomendadas/ Suggested Bulbs
R09224 R09225



Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx. 10W LED


OAMI 005818614-0003

IGUAZÚ
José Ignacio Ballester

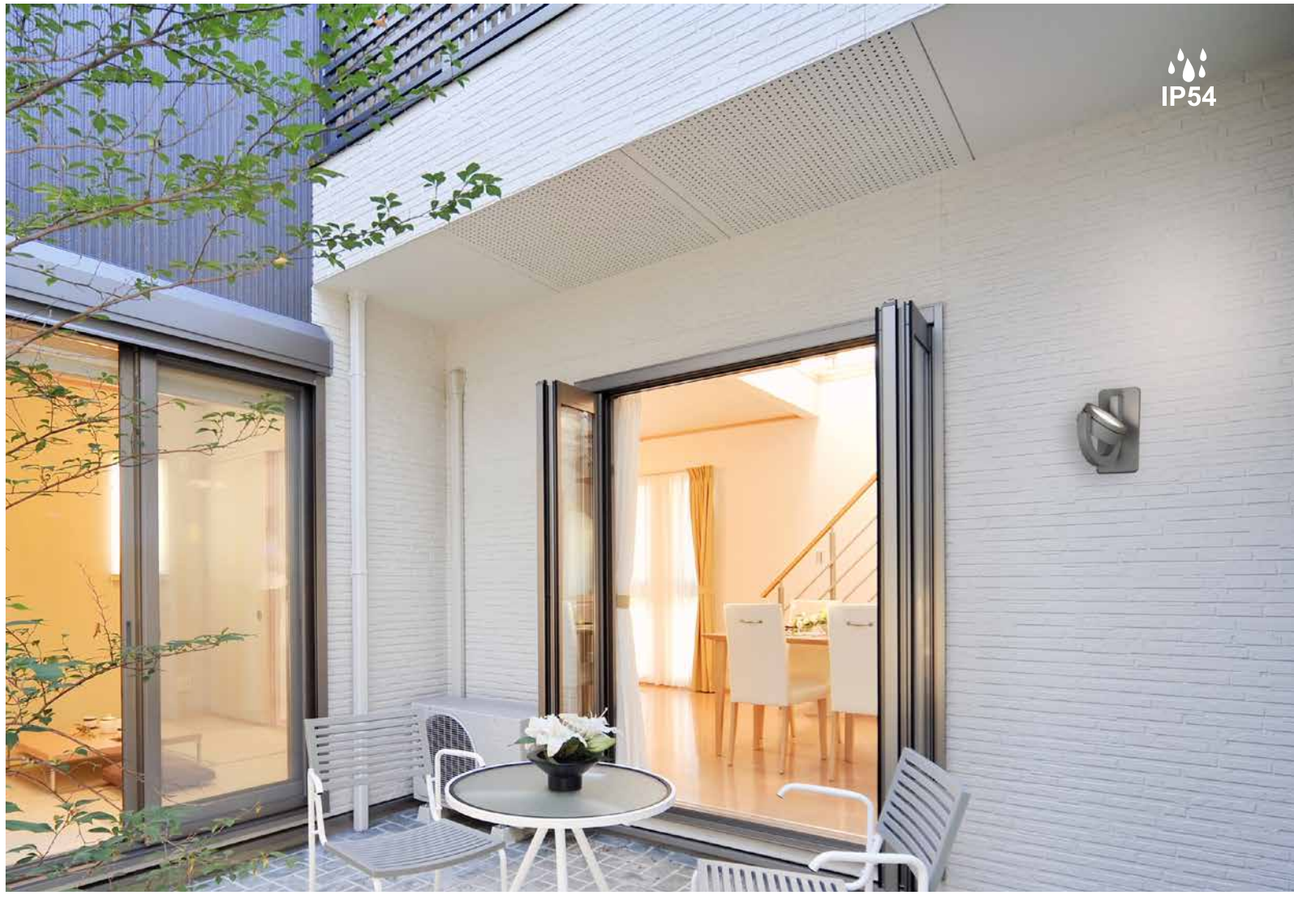








Luz orientable-*Orientable light*

IGUAZÚ
José Ignacio Ballester

6769 Gris oscuro-*Dark grey*
2L×GX53

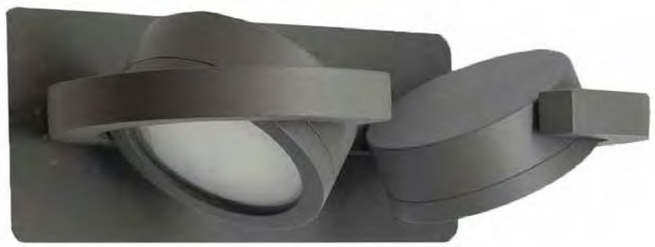


6768 Blanco-*White*
2L×GX53





Bombillas Recomendadas/ Suggested Bulbs
R09224 R09225




garantia manfrado.org 2 YEAR WARRANTY GARANTIA

NOT INCLUDED

IP54

Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx. 10W LED






Luz orientable-*Orientable light*

6506 Gris oscuro-*Dark grey*
1L×GX53



6505 Blanco-*White*
1L×GX53







Bombillas Recomendadas/ Suggested Bulbs
R09224 R09225




6745
pág. 404

garantia mantenco.org 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP54

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx. 10W LED

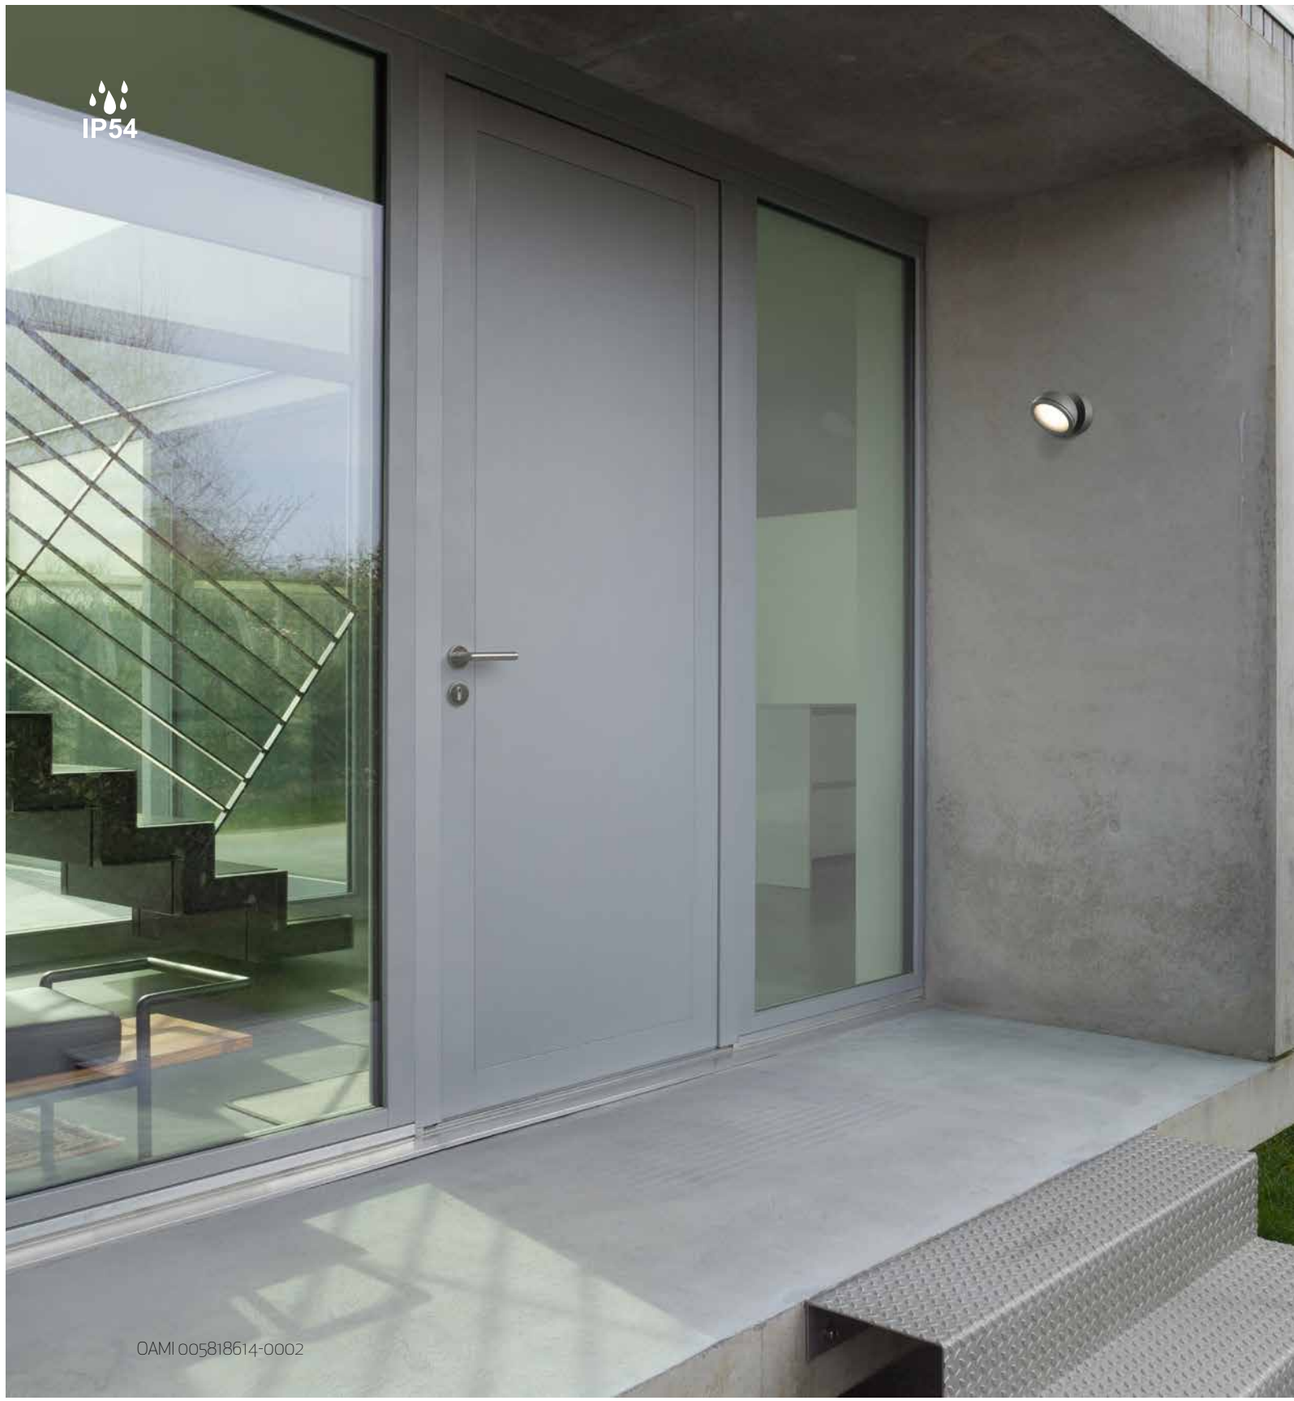


OAMI 005818614-0002

EVEREST
José Ignacio Ballester

KANDANCHU


7470 Corten
2L×GU10 (no incl.)






7471 Corten
2L×GU10 (no incl.)






7472 Corten
1L×GU10 (no incl.)





7473 Corten
1L×GU10 (no incl.)







NOT INCLUDED

WARRANTY GARANTÍA

IP54

Aluminio/Cristal-*Aluminium/Glass* **100-240V ~ 50/60Hz** GU10 máx. 10W LED

6510 Gris oscuro-*Dark grey*
2L×GU10




6511 Blanco-*White*
2L×GU10



7037 Negro-*Black*
2L×GU10





6514 Gris oscuro-*Dark grey*
2L×GU10




6515 Blanco-*White*
2L×GU10



7038 Negro-*Black*
2L×GU10







Aluminio/cristal-Aluminium/glass 100-240V ~ 50/60Hz máx.10W LED

6512 Gris oscuro-*Dark grey*
1L×GU10




6513 Blanco-*White*
1L×GU10



7039 Negro-*Black*
1L×GU10





6516 Gris oscuro-*Dark grey*
1L×GU10




6517 Blanco-*White*
1L×GU10



7040 Negro-*Black*
1L×GU10







Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx.10W LED

DAVOS


3000K

6520 Gris oscuro-*Dark grey*
LED 12W **3000K**-1100 lm

6521 Arena Blanco-*Sand White*
LED 12W **3000K**-1100 lm


6524 Negro Arena-*Sand black*
LED 12W **3000K**-1100 lm

6527 Corten-*Corten*
LED 12W **3000K**-1100 lm




6522 Gris oscuro-*Dark grey*
LED 12W **3000K**-1100 lm


6523 Arena Blanco-*Sand White*
LED 12W **3000K**-1100 lm











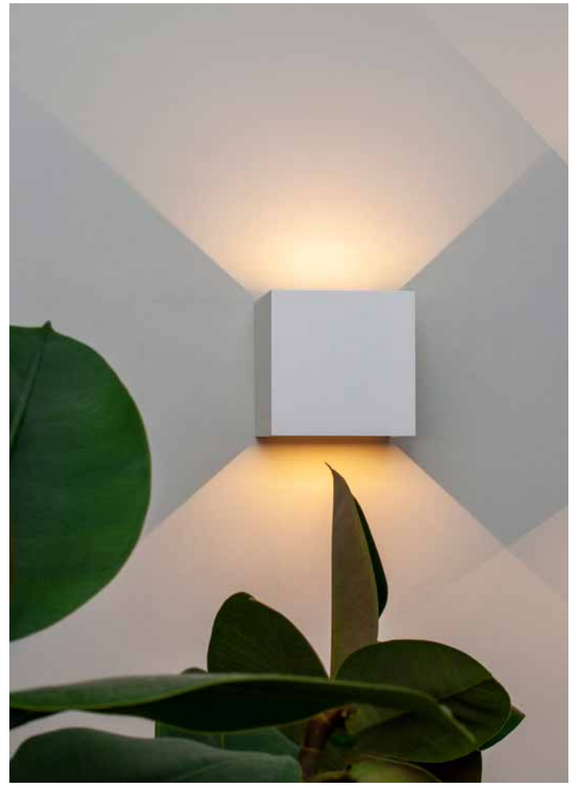

LX-DISTANCE DIAGRAM



Luminous IntensityD istributionC urve



Beam Angle(50%) C0-180,C90-270:7 9.3d eg,89.1d eg
C0-180 C90-270



LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenimiento 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP54

Aluminio-*Aluminium* 100-240V~ 50/60Hz

DAVOS


4000K

7647 Gris oscuro-*Dark grey*
LED 12W **4000K**-1100 lm


7648 Arena Blanco-*Sand White*
LED 12W **4000K**-1100 lm

7649 Negro Arena-*Sand black*
LED 12W **4000K**-1100 lm

7650 Corten-*Corten*
LED 12W **4000K**-1100 lm











7645 Gris oscuro-*Dark grey*
LED 12W **4000K**-1100 lm

7646 Arena Blanco-*Sand White*
LED 12W **4000K**-1100 lm






Luminous IntensityD istributionC urve



Beam Angle(50%) C0-180,C90-270:1 03.9 deg,84.5 deg

C0-180 C90-270



LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantraco 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP54

Aluminio-*Aluminium* 220-240V~ 50/60Hz

DAVOS XL

3000K




7437 Negro arena-Sand *black*
LED 20W **3000K** 1830 lm



7435 Gris oscuro-*Dark grey*
LED 20W **3000K** 1830 lm



7436 Blanco-*White*
LED 20W **3000K** 1830 lm







7438 Corten-*Corten*
LED 20W **3000K** 1830 lm



Aluminio-*Aluminium* **220-240V 50/60Hz** CRI:≥ 80

DAVOS XL


4000K

7653 Negro arena-Sand *black*
LED 20W **4000K** 1830 lm




7652 Blanco-*White*
LED 20W **4000K** 1830 lm









7651 Gris oscuro-*Dark grey*
LED 20W4000K 1830 lm



7654 Corten-*Corten*
LED 20W **4000K** 1830 lm
















Aluminio-*Aluminium* **220-240V 50/60Hz** CRI:≥ 80

TRIAX







6525 Gris oscuro-*Dark grey*
LED 8W **3000K**-750 lm



6526 Blanco arenado-*Sand white*
LED 8W **3000K**-750 lm

















Aluminio-*Aluminium* 220-240V~ 50/60Hz




SOCHI

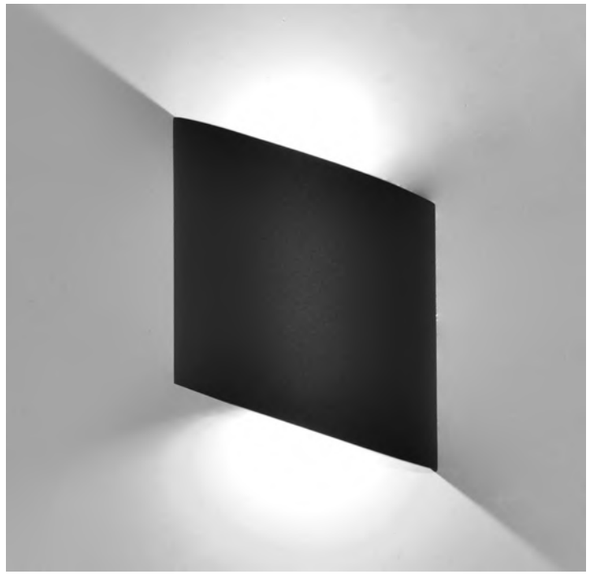

6530 Gris oscuro-*Dark grey*
LED 6W **3000K** 660lm



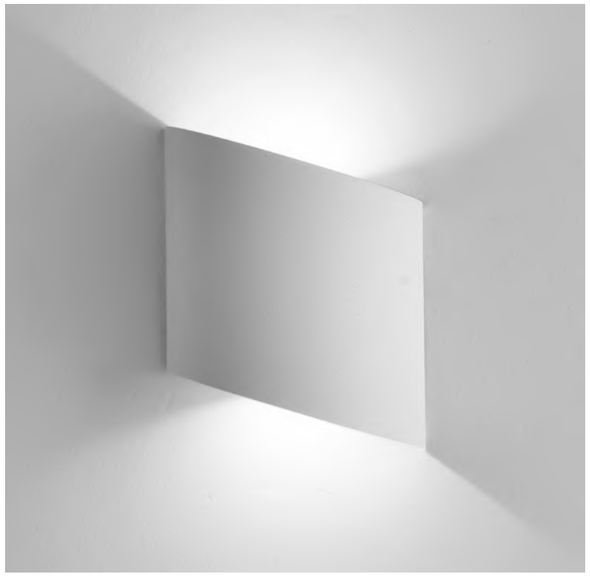

6531 Arena Blanco-*Sand White*
LED 6W **3000K** 660 lm

LED life / LED vida 20.000 h
ON / OFF 30.000
garantía mantenga.org 5 años WARRANTY GARANTÍA LED
LED INCLUDED
IP54

Aluminio-*Aluminium* 220-240V~ 50/60Hz

IP54

SOCHI

IP54




6534 Gris oscuro-*Dark grey*
LED 9.6W **3000K** 720 lm



6535 Blanco-*White*
LED 9.6W **3000K** 720 lm



6538 Corten-*Corten*
LED 9.6W **3000K** 720 lm



LED life / LED vida 25.000 h · ON / OFF 30.000 · garantía montaje con 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP54

Aluminio-*Aluminium* 220-240V ~ 50/60Hz

IP54


6537 Blanco-*White*
LED 9.6W **3000K** 720 lm



6536 Gris oscuro-*Dark grey*
LED 9.6W **3000K** 720 lm



6539 Corten-*Corten*
LED 9.6W **3000K** 720 lm





LED life / LED vida 25.000 h · ON / OFF 30.000 · garantía montaje con 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP54


Aluminio-*Aluminium* 220-240V ~ 50/60Hz

ARCS





6541 Blanco arenado-*Sand White*
LED 6W **3000K** 450 lm



6540 Gris oscuro-*Dark grey*
LED 6W **3000K** 450 lm

LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenga 5 WARRANTY GARANTIA LED · LED INCLUDED · IP54

Aluminio-*Aluminium* 220-240V~ 50/60Hz


JACKSON



6542 Gris oscuro-*Dark grey*
LED 6W **3000K** 420 lm

6543 Blanco arenado-*Sand White*
LED 6W **3000K** 420 lm







LED life / LED vida 20.000 h · ON / OFF 30.000 · garantía mantenga 5 WARRANTY GARANTIA LED · LED INCLUDED · IP54

Aluminio-*Aluminium* 220-240V~ 50/60Hz

Aplique exterior-*Outdoor wall lamp*

UTAH

IP65

7050 Gris Oscuro-*Dark Grey*
1L x E27 (no incl.)




7051 Blanco-*White*
1L x E27 (no incl.)



7052 Corten-*Corten*
1L x E27 (no incl.)



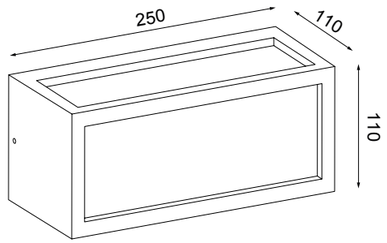

garantia mantraco.org 2 YEAR WARRANTY GARANTIA

NOT INCLUDED

IP65

Aluminio-*Aluminium* 100-240V~ 50/60Hz E27 máx. 20W LED




MERIBEL

3000K


7086 Grafito-*Graphite*


LED 2,2W 188 lm

PIR sensor
A:120°
D:≤6m

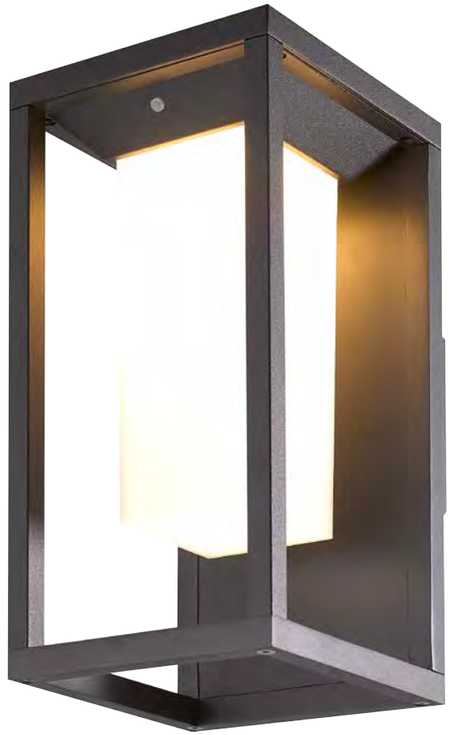

SOLAR LAMP





Charge: 6-8h (Sunshine)
Work time : Full light 3h / Micro light 25h

SOLAR LAMP · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento 5 WARRANTY GARANTIA LED · LED INCLUDED · III · IP54

Aluminio-*Aluminium* DC 3.7V CRI≥ 80

IP54

SOLDEN

3000K


IP65

7070 Gris oscuro-*Dark grey*
LED 9W 773lm



7071 Blanco-*White*
LED 9W 773lm






7072 Gris oscuro-*Dark grey*
LED 9W 762lm



7073 Blanco-*White*
LED 9W 762lm








Aluminio/PC-*Aluminium/PC* 100-240V~ 50/60Hz CRI≥ 80



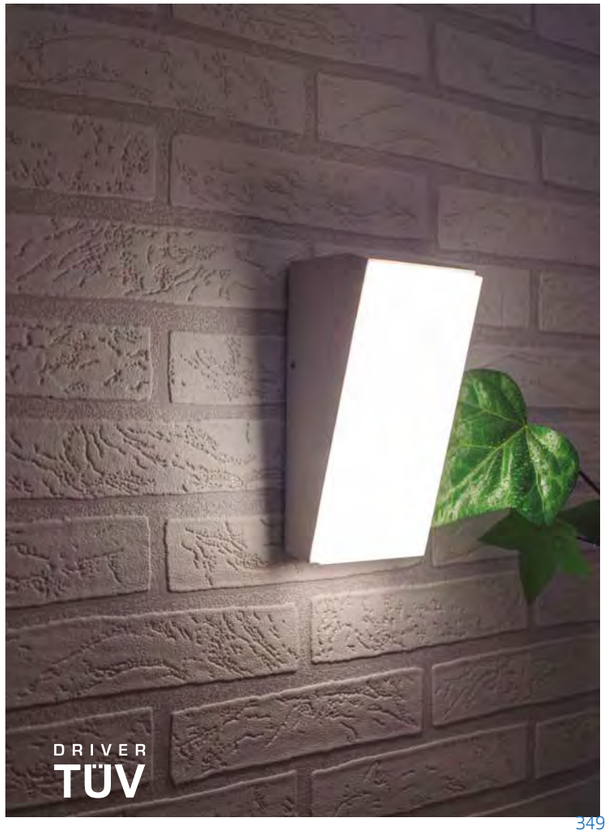

ALPINE

3000K


IP65

7045 Gris Oscuro- *Dark Grey*
LED 6W 510lm



7046 Blanco-*White*
LED 6W 510lm



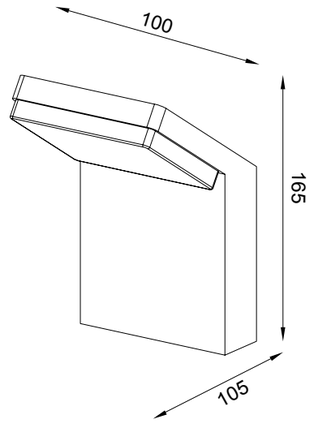

LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantracon 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP65

Aluminio-*Aluminum* 220-240V~ 50/60Hz CRI≥ 80

IP65

DRIVER
TÜV

CHAMONIX

3000K


IP65

7062 Gris oscuro-*Dark grey*
LED 9W 725lm



7063 Blanco-*White*
LED 9W 725lm







7060
pág. 362

LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento 5 WARRANTY GARANTÍA LED · LED INCLUDED · IP65

Aluminio/PC-*Aluminium/PC* 100-240V~ 50/60Hz CRI> 80



TAOS

3000K


IP65


7108 Gris Piedra-*Stone Grey*
LED 12W 1100lm



7109 Blanco-*White*
LED 12W 1100lm





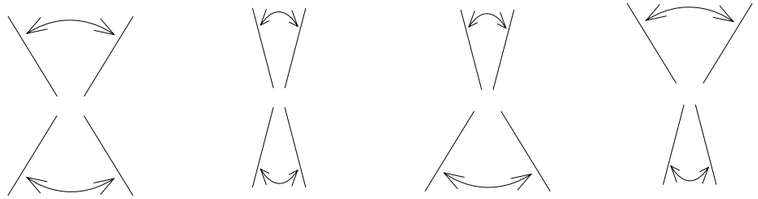




7501
pág. 410

LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenga 5 años WARRANTY GARANTÍA LED · LED INCLUDED · IP65

Cemento liso-*Smooth cement* 220-240V~ 50/60Hz

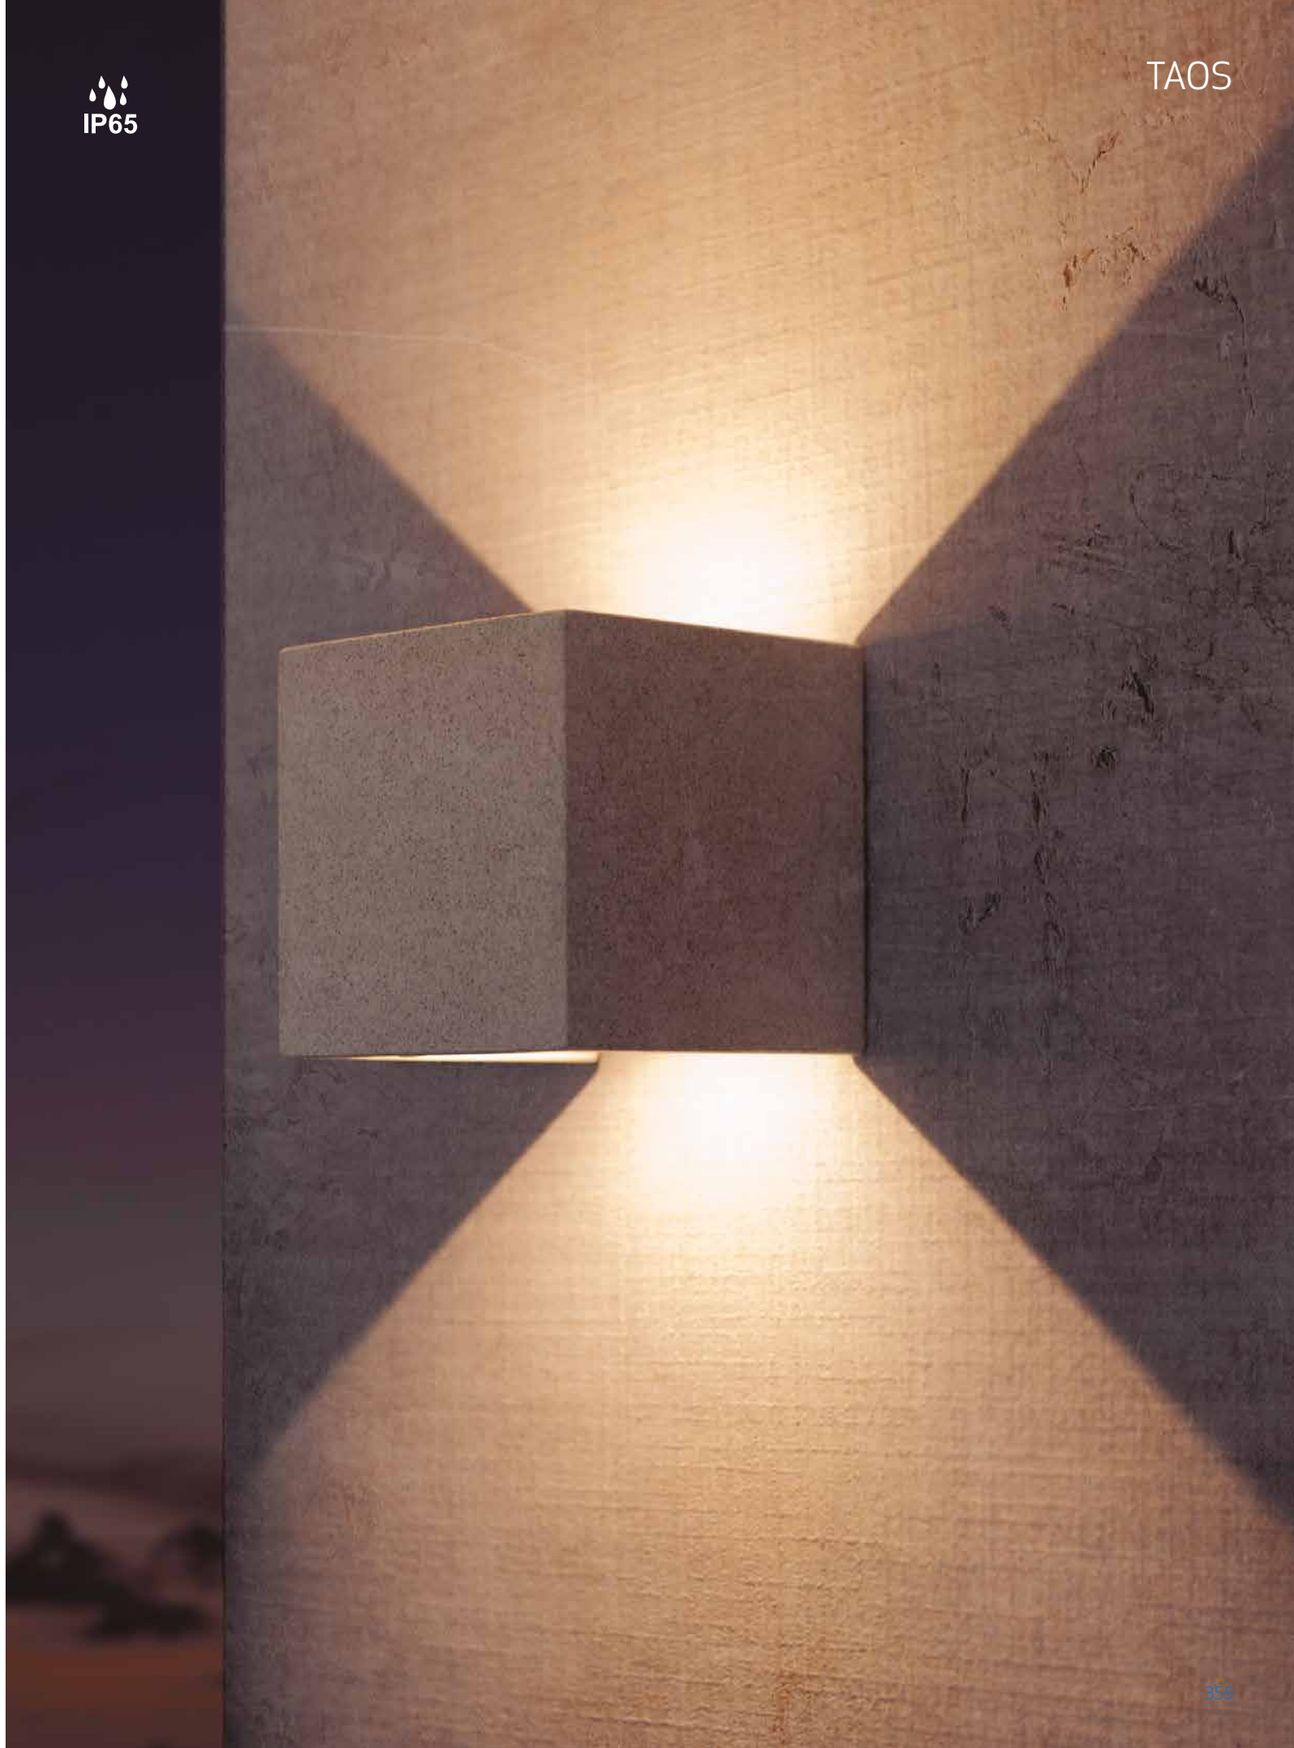


Aplique exterior-*Outdoor wall lamp*

IP65

7182 Blanco-*White*
2L x GU10 (no incl.)






7183 Gris oscuro-*Dark grey*
2L x GU10 (no incl.)



7180 Blanco-*White*
2L x GU10 (no incl.)





7181 Gris oscuro-*Dark grey*
2L x GU10 (no incl.)



garantía mantraco.org 2 años WARRANTY GARANTÍA

NOT INCLUDED

IP65

Hormigón-*Concrete* 100-240V~ 50/60Hz GU10 máx.12W Led



7187
pág. 366


IP65

LEVI

MAYA




6553 Gris oscuro-*Dark grey*
1L x E27





6554 Gris oscuro-*Dark grey*
1L x E27




garantía mantraco.org 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP54

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx. 20 W LED

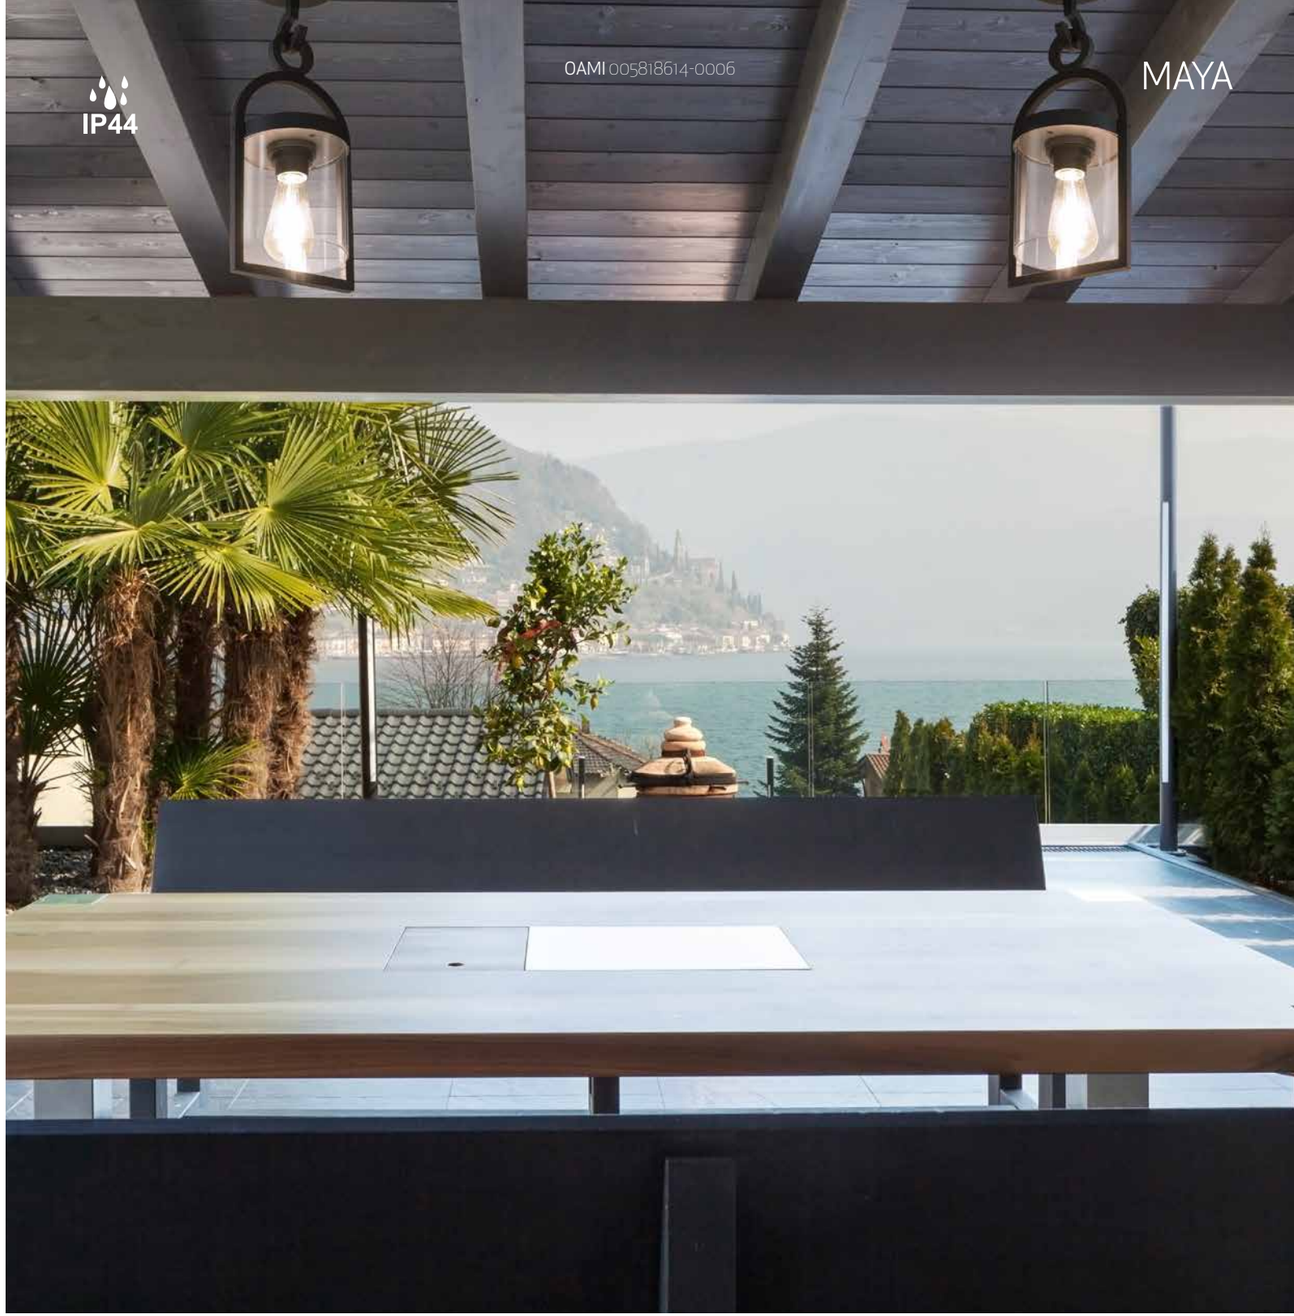



6550
pág. 400

6551
pág. 306

6555
pág. 424

VERBIER


IP65

7065 Gris Oscuro-*Dark Grey*
2L x E27 (no incl.)



7066 Gris Oscuro-*Dark Grey*
2L x E27 (no incl.)



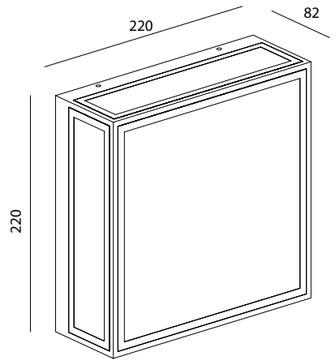


garantia mantraco.org 2 WARRANTY GARANTÍA

NOT INCLUDED

IP65

Aluminio/Cristal-*Aluminium/Glass* 100-240V~ 50/60Hz E27 máx.20W Led

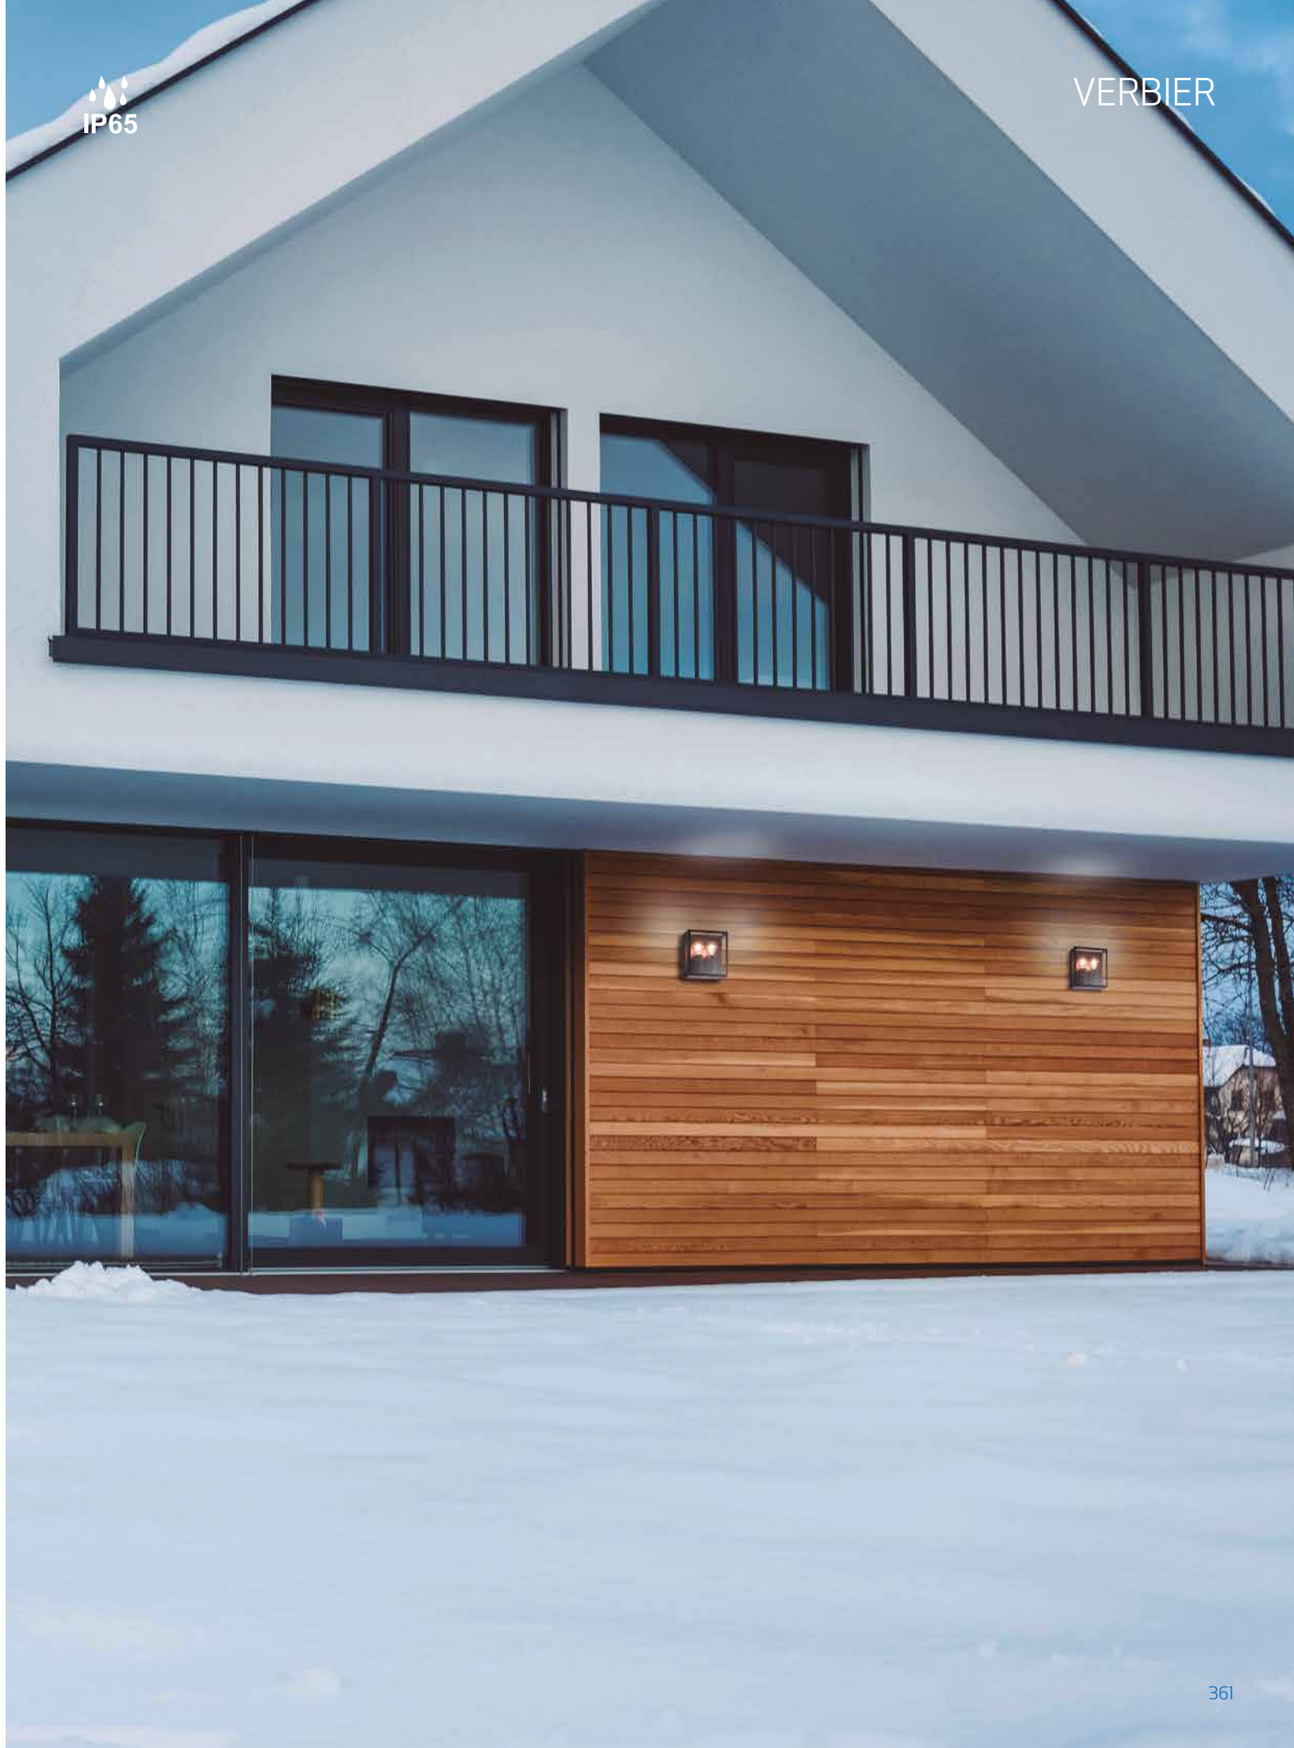

CHAMONIX

3000K


IP65

7060 Gris oscuro-*Dark grey*
LED 9W 725lm



7061 Blanco-*White*
LED 9W 725lm







7062
pág. 352

LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento flujo 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP65

Aluminio/PC-*Aluminium/PC* 100-240V~ 50/60Hz CRI≥ 80




BACHELOR

3000K

IP65

7056 Blanco-*White*
LED 14W 1180lm





7055 Gris oscuro-*Dark grey*
LED 14W 1180lm



LED life / LED vida 50.000 h
ON / OFF 30.000
garantía mantraco.com 5 YEAR WARRANTY GARANTÍA LED
LED INCLUDED
IP65

Aluminio/Cristal-*Aluminium/Glass* 100-240V~ 50/60Hz CRI≥ 80


LEVI

Plafón exterior-*Outdoor ceiling lamp*

IP65

7186 Blanco-*White*
1L x GU10 (no incl.)






7187 Gris oscuro-*Dark grey*
1L x GU10 (no incl.)



7184 Blanco-*White*
1L x GU10 (no incl.)





7185 Gris oscuro-*Dark grey*
1L x GU10 (no incl.)



garantía mantenida por 2 AÑOS WARRANTY GARANTÍA

NOT INCLUDED

IP65

Hormigón-*Concrete* 100-240V~ 50/60Hz GU10 máx.12W Led



7181
pág. 356



POLINESIA

Santiago Sevillano

7134 Beige oscuro-Dark *beige*


1L x E27 (no incl.)

IP20

USB OUTPUT 5V/2A



USB Output

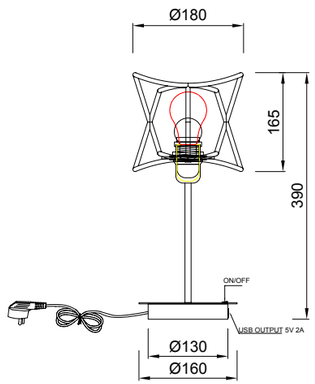



7138
pág. 390



7133
pág. 304



7131
pág. 414

ON/OFF

NOT INCLUDED

garantía mantraco 2 YEAR 100% WARRANTY GARANTÍA

Aluminio/fibra textil sintética-*Aluminium/synthetic textile fibre* 100-240V~ 50/60Hz E27 máx.20W Led


Registered Nº 007663331-0007

KLAPPEN

3000K

Sobremesa portátil exterior-*Portable outdoor table lamp*




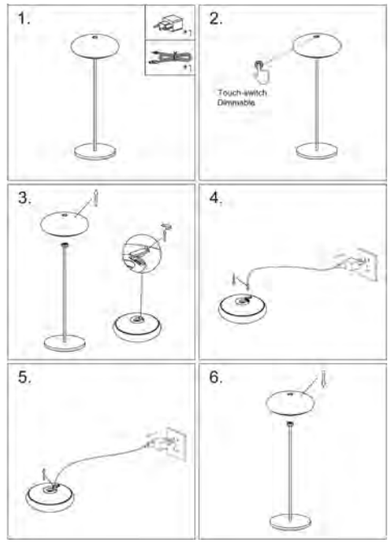

7095 Blanco-*White*

LED 2,2W 188lm



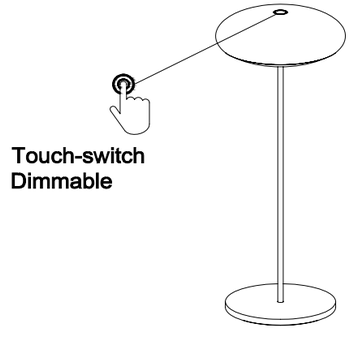



Dimmable · Touch switch · working 9 hours · charge 7 hours · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantia.mantraco.org 5 YEAR LED WARRANTY GARANTÍA LED · LED INCLUDED · IP54

Aluminio-*Aluminum* DC 3,7V CRI≥ 80

7096 Negro-*Black*

LED 2,2W 188lm







Dimmable · Touch switch · working 9 hours · charge 7 hours · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantia.mantraco.org 5 YEAR LED WARRANTY GARANTÍA LED · LED INCLUDED · IP54

Aluminio-*Aluminum* DC 3,7V CRI≥ 80

Sobremesa portátil exterior-*Portable outdoor table lamp*

K3


3000K

7116 Blanco-*White*
LED 2W 155 lm



7115 Negro-*Black*
LED 2W 155 lm











Dimmable · Touch switch · working 9 hours · charge 7 hours · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía.manfrotto.eu 5 años WARRANTY GARANTÍA LED · LED INCLUDED · III · IP54

Aluminio/PC-*Aluminum/PC* DC 5V/1A CRI≥ 85




ASTÚN

3000K

6491 Grafito-*Graphite*
LED 2.2W 188 lm






6905 Blanco-*White*
LED 2.2W 188 lm




6907 Grafito-*Graphite*
LED 2.2W 188 lm





6906 Blanco-*White*
LED 2.2W 188 lm





Aluminio-*Aluminium* DC 5V/1A





K2

6480 Negro Mate-*Matt Black*
LED 2.2W **3000K** 188lm




6484 Amarillo-*Yellow*
LED 2.2W **3000K** 188lm




6481 Blanco Mate-*Matt White*
LED 2.2W **3000K** 188lm












7101
pág. 384



Aluminio-*Aluminium* DC 5V/1A



MERIBEL

3000K


SOLAR LAMP

IP54


7085 Grafito-*Graphite*
LED 3,5W 300lm




PIR sensor
A:120°
D:≤6m





Charge: 6-8h (Sunshine)
Work time : Full light 3h / Micro light 25h






Included





Included



SOLAR LAMP · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantrac.com 5 años WARRANTY GARANTIA LED · LED INCLUDED · 35° · III · IP54

Aluminio-*Aluminium* **DC** 3.7V CRI≥ 80

CHEVALIER
3000K


7088 Grafito-*Graphite*
LED 2,2W 188lm





PIR sensor
A:120°
D:≤6m




Charge: 6-8h (Sunshine)
Work time : Full light 3h / Micro light 25h


Included


Included



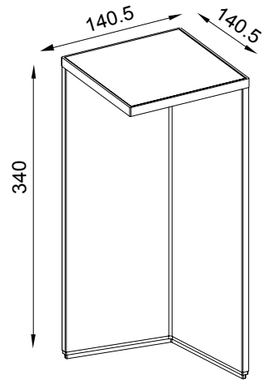

SOLAR LAMP · ON/OFF · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenga 5 años WARRANTY GARANTÍA LED · LED INCLUDED · III · IP54

Aluminio -*Aluminium* DC 3.7V CRI≥ 80



SAPPORO


3000K

Sobremesa exterior portátil SOLAR LED -*Portable outdoor table lamp SOLAR LED*

SOLAR LAMP IP54

7090 Grafito-*Graphite*
LED 3W 238lm



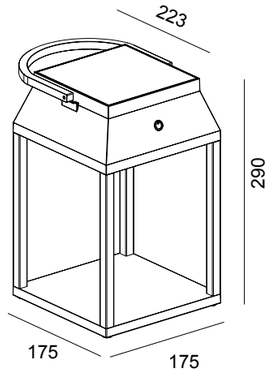


7091 Blanco-*White*
LED 3W 238lm



7092 Grafito-*Graphite*
LED 3W 238lm





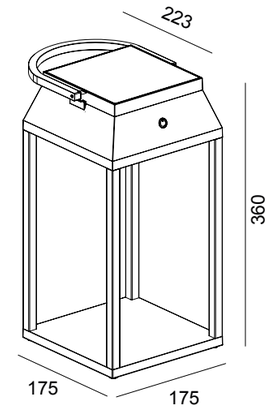

7093 Blanco-*White*
LED 3W 238lm



Charge : 16 ~17H (sunshine)
6 ~7H (usbcharging)





SOLAR LAMP · Touch switch · LED life / LED vida 50.000 h · ON / OFF 30.000 · garantia mantraco.org 5 years WARRANTY GARANTIA LED · LED INCLUDED · III · IP54

Aluminio -*Aluminium* DC 3.7V CRI≥ 80



K2


3000K

Pie de salón portátil exterior-*Portable outdoor floor lamp*

IP54

7100 Blanco-*White*
LED 2,2W 188 lm





7101 Negro-*Black*
LED 2,2W 188 lm












6480
pág. 376



Aluminio-*Aluminum* DC 3,7V CRI≥ 80

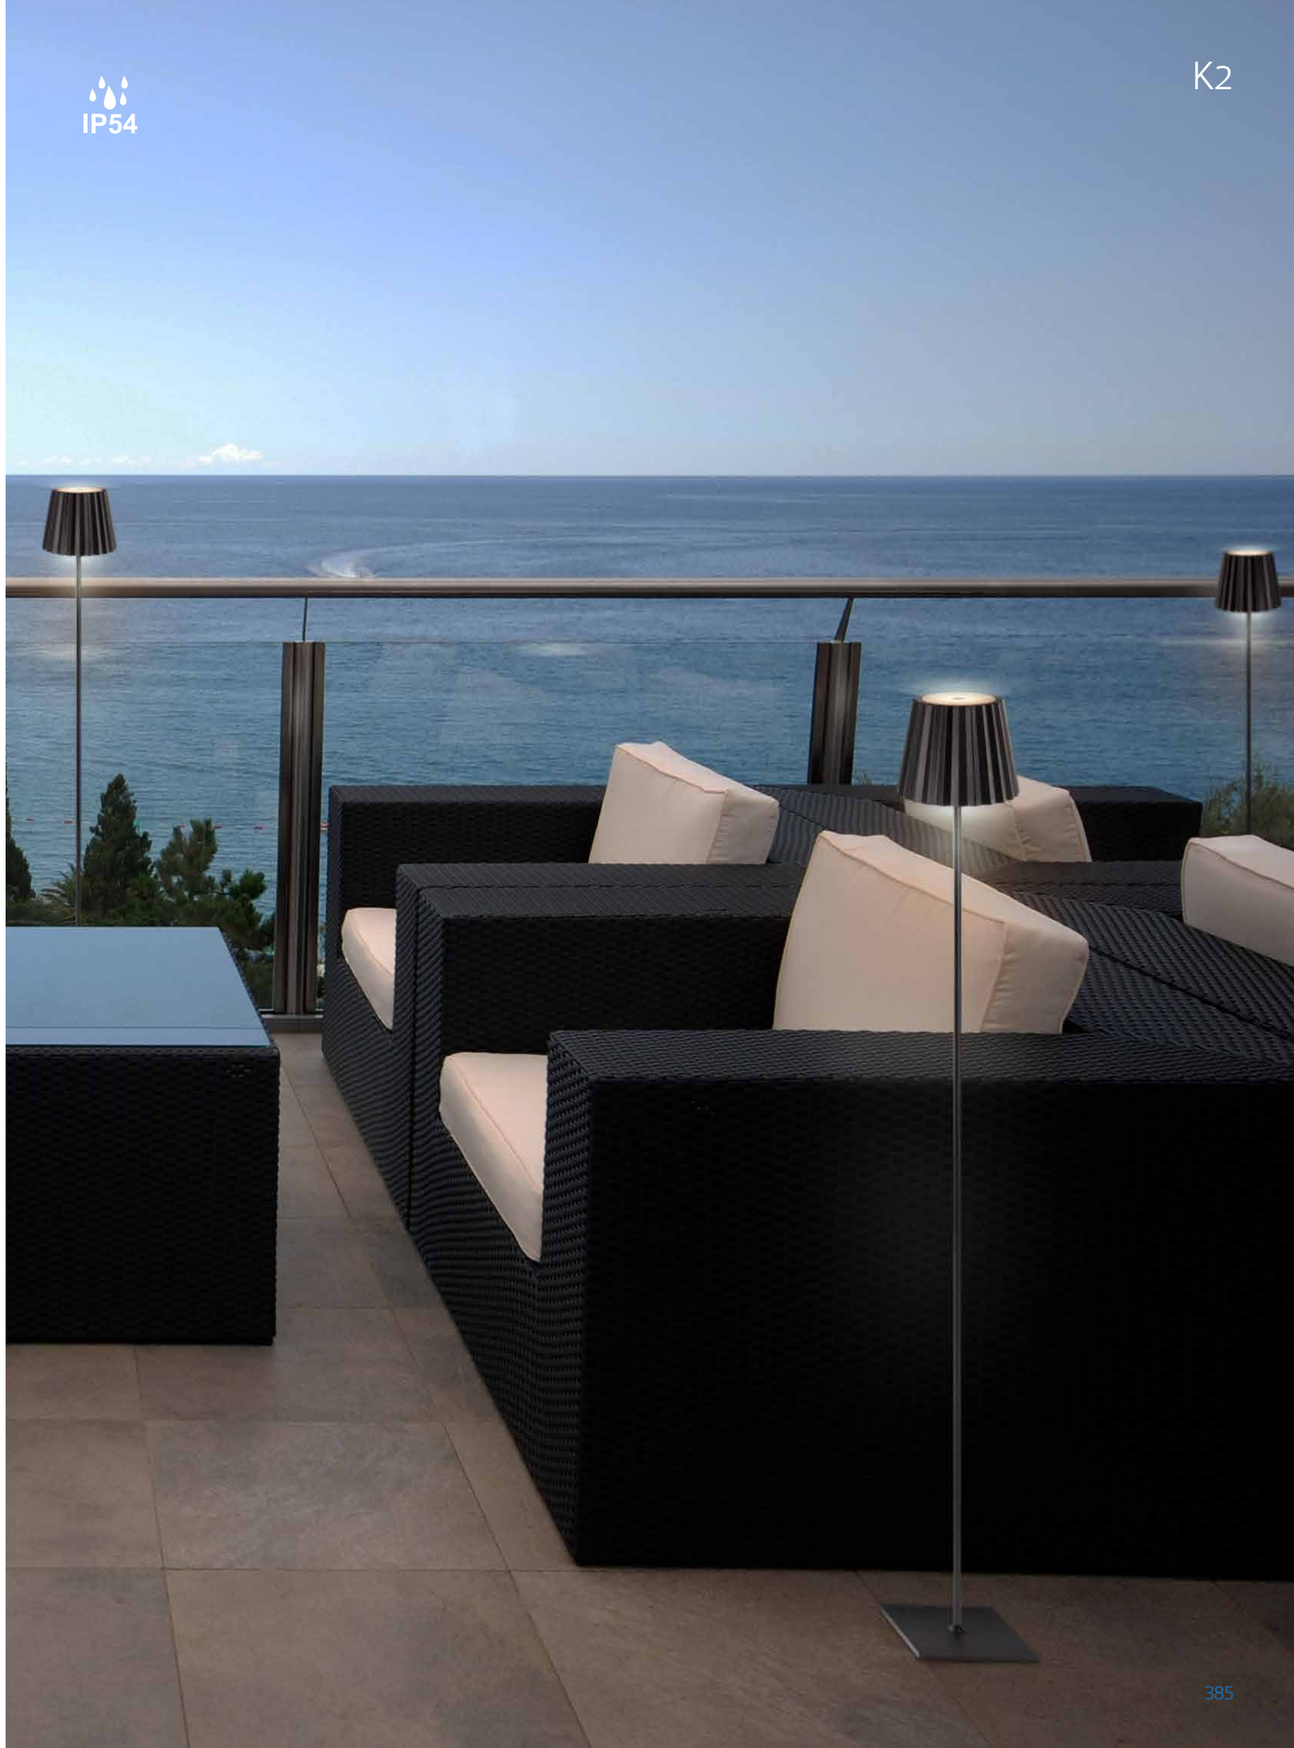


FLAME

Santiago Sevillano



1326 Blanco-*White*

1L×E27 máx. 20W Led




Complementos Exterior-*Outdoor Complements*

1400
pág. 398




TU0652 Piqueta-*Spike*





TU0492 Piqueta-*Spike*



TU0494 Base-*Ground base*















PE / ABS-*PE* / *ABS* 100-240V~ 50/60Hz

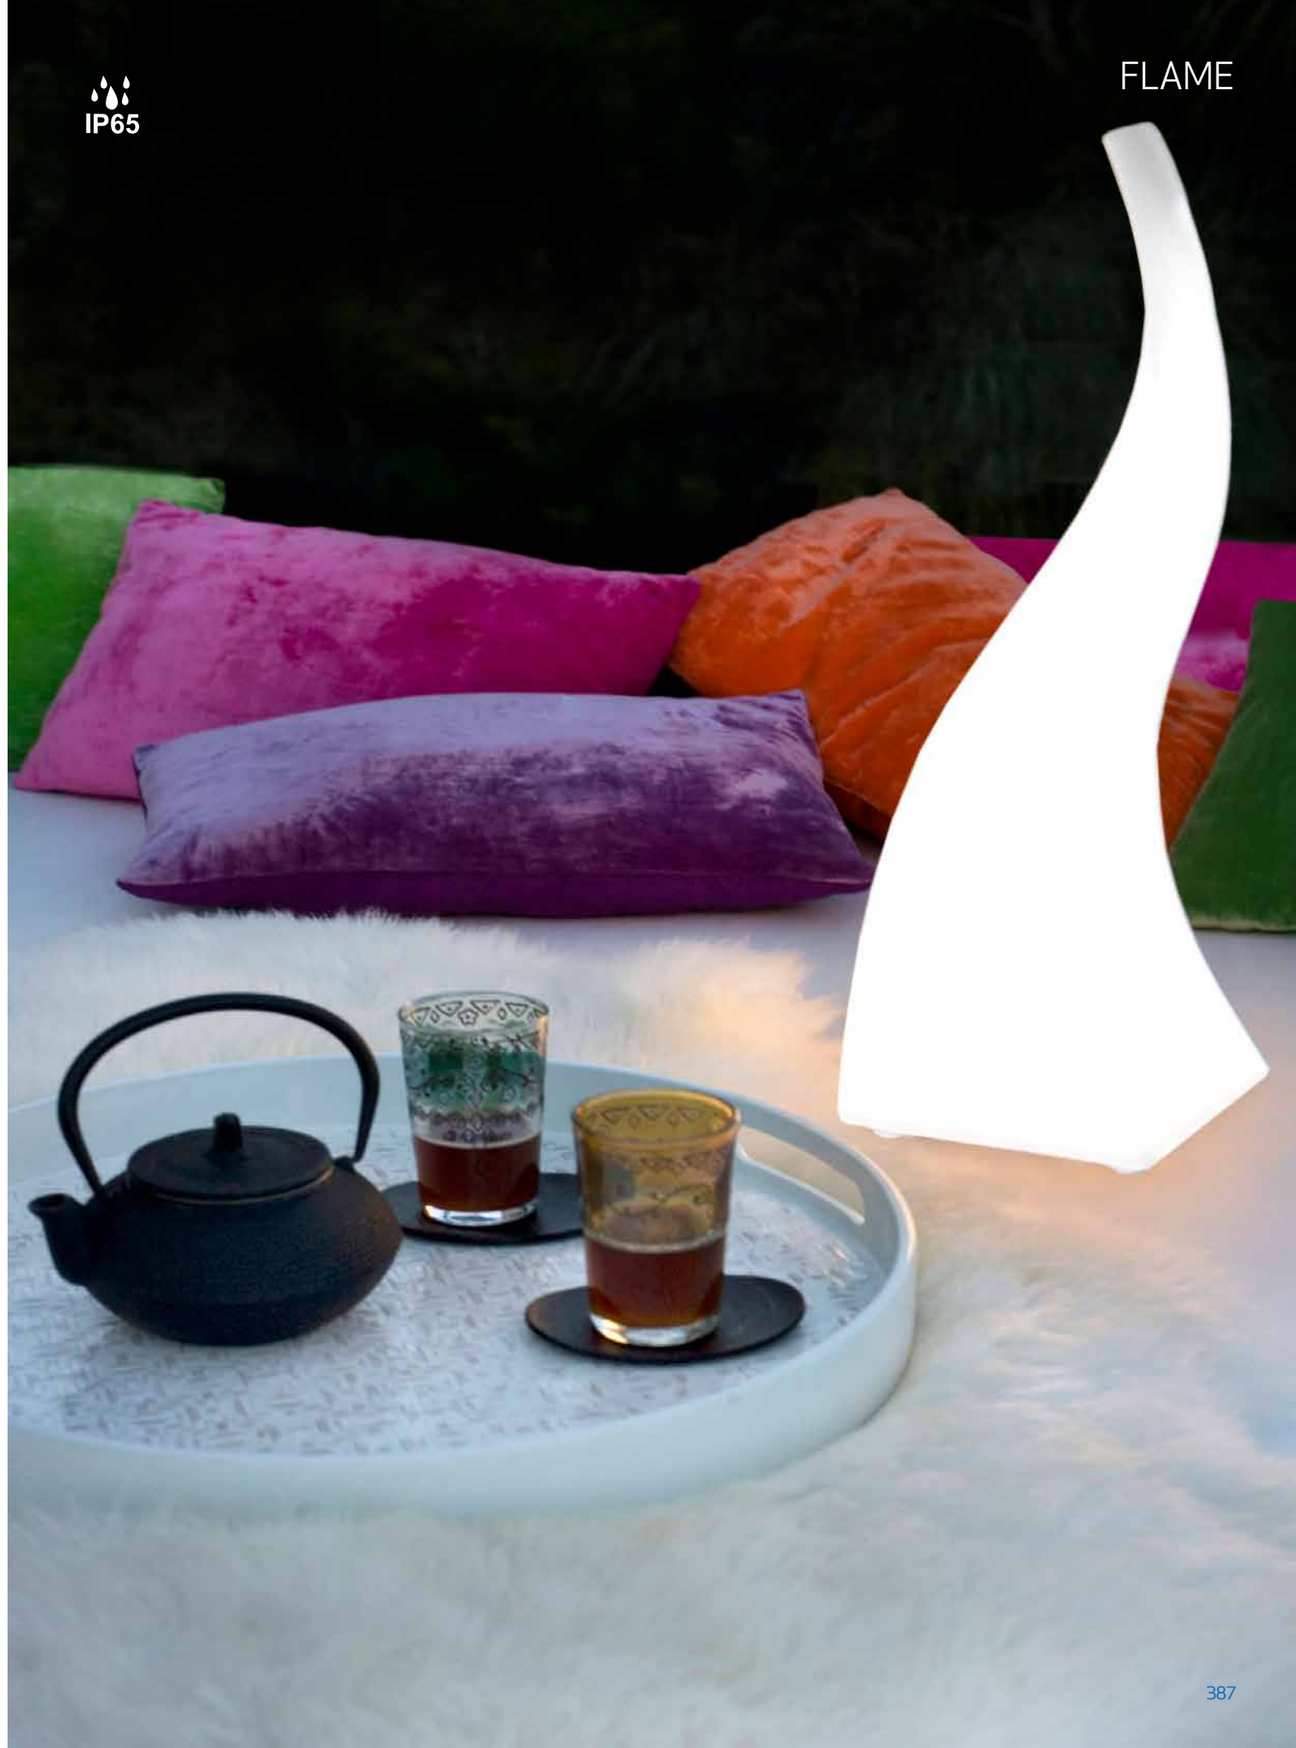


AVORIAZ


1388 Blanco-*White*
1 x E27 máx 20W **LED**



1391 Blanco-*White*
1 x E27 máx 20W **LED**




1394 Blanco-*White*
1 x E27 máx 20W **LED**




Complementos Exterior-*Outdoor Complements*

TU0492 Piqueta-*Spike*







TU0652 Piqueta-*Spike*



TU0653 Piqueta-*Spike*



TU0494 Base-*Ground base*






1397
pág. 426

garantia mantenco.org 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP65

PE / ABS 100-240V ~ 50/60Hz

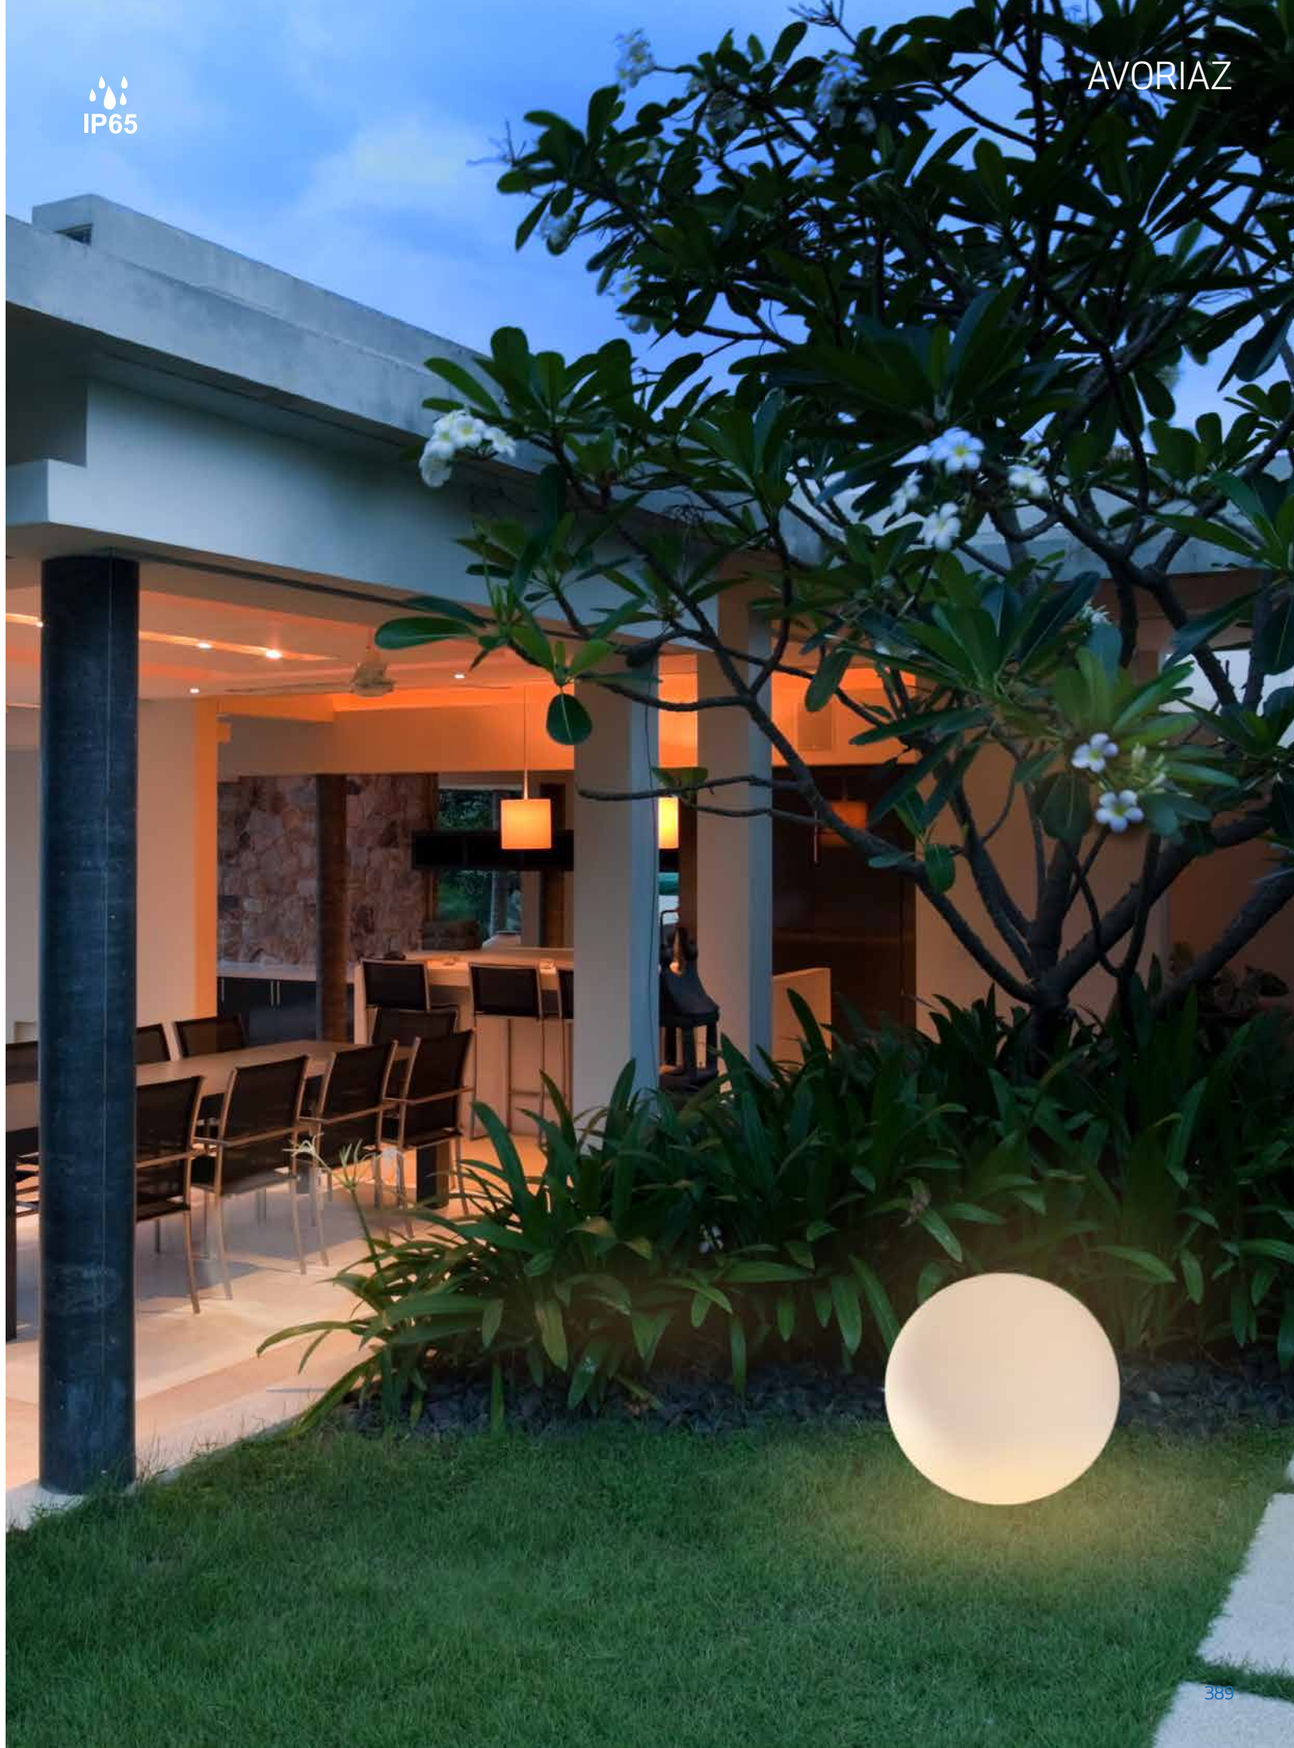

POLINESIA


Santiago Sevillano

IP44



7138 Beige oscuro-Dark *beige*

1L x E27 (no incl.)

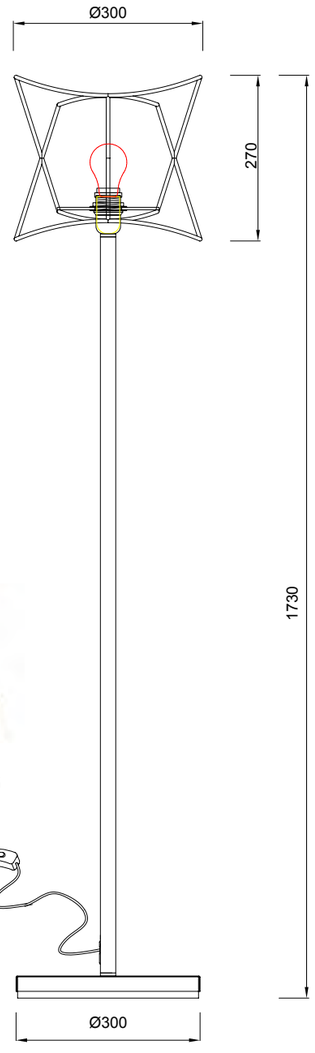



7134
pág. 368

7133
pág. 304

7131
pág. 416

ON/OFF

NOT INCLUDED

IP44

Aluminio/fibra textil sintética-*Aluminium/synthetic textile fibre* 100-240V~ 50/60Hz E27 máx.20W Led


IP44



7136 Beige oscuro-Dark *beige*

1L x E27 (no incl.)



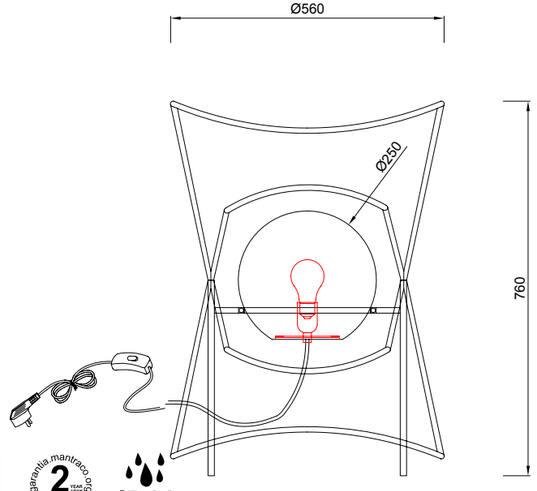

ON/OFF

NOT INCLUDED


IP44

Aluminio/fibra textil sintética-*Aluminium/synthetic textile fibre* 100-240V~ 50/60Hz E27 máx.20W Led

6545 Gris oscuro-*Dark Grey*

2L×G9






NOT INCLUDED

IP65


Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx 5W LED

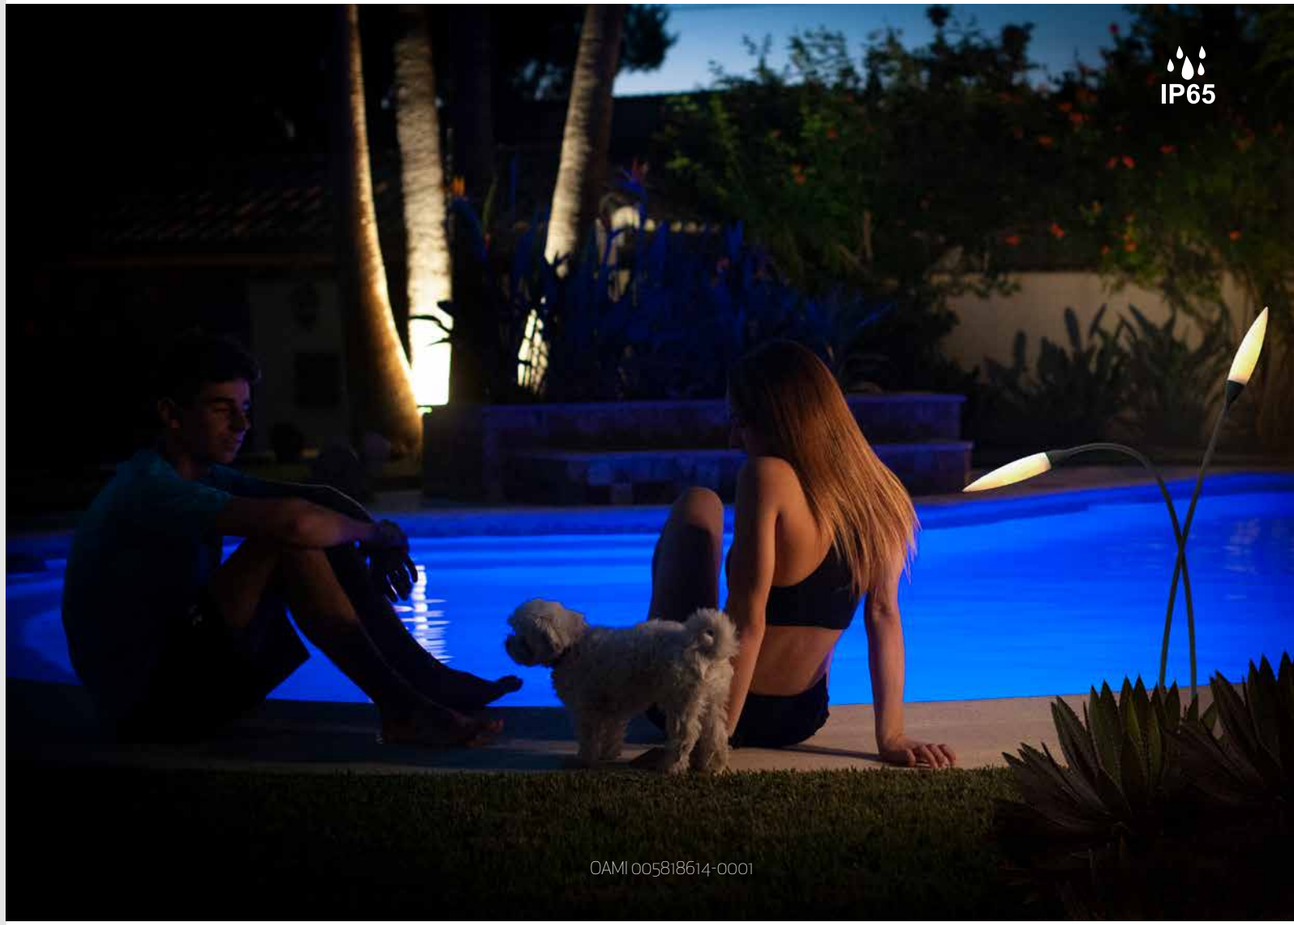


OAMI 005818614-0001

* Complementos Exterior-*Outdoor Complements*


TU0653 Piqueta-*Spike*



TU0652 Piqueta-*Spike*



TU0492 Piqueta-*Spike*





ESPIGA

IP65

6546 Gris oscuro-*Dark Grey*
3L×G9



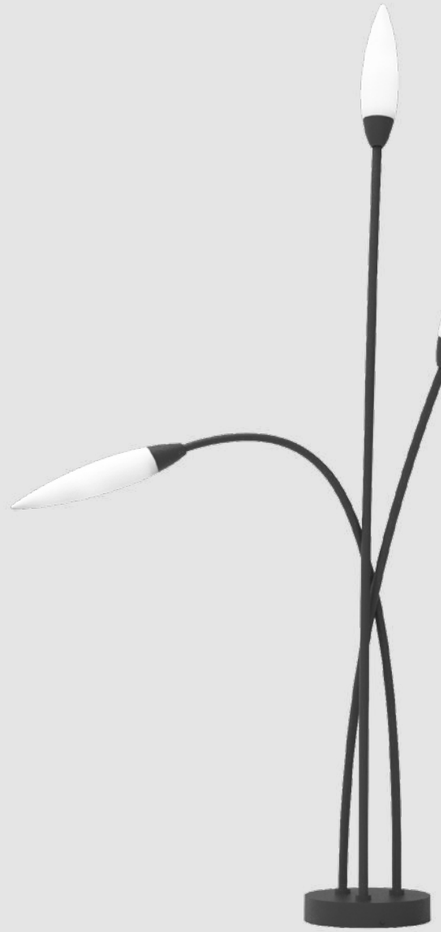

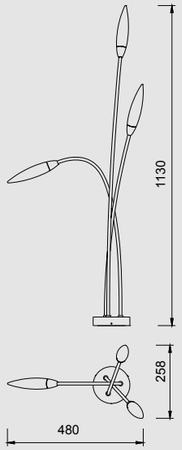

garantia.mantraco.org 2 YEAR AÑOS WARRANTY GARANTÍA

NOT INCLUDED


IP65


Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx 5W LED



ESPIGA

6547 Gris oscuro-*Dark Grey*
5L×G9

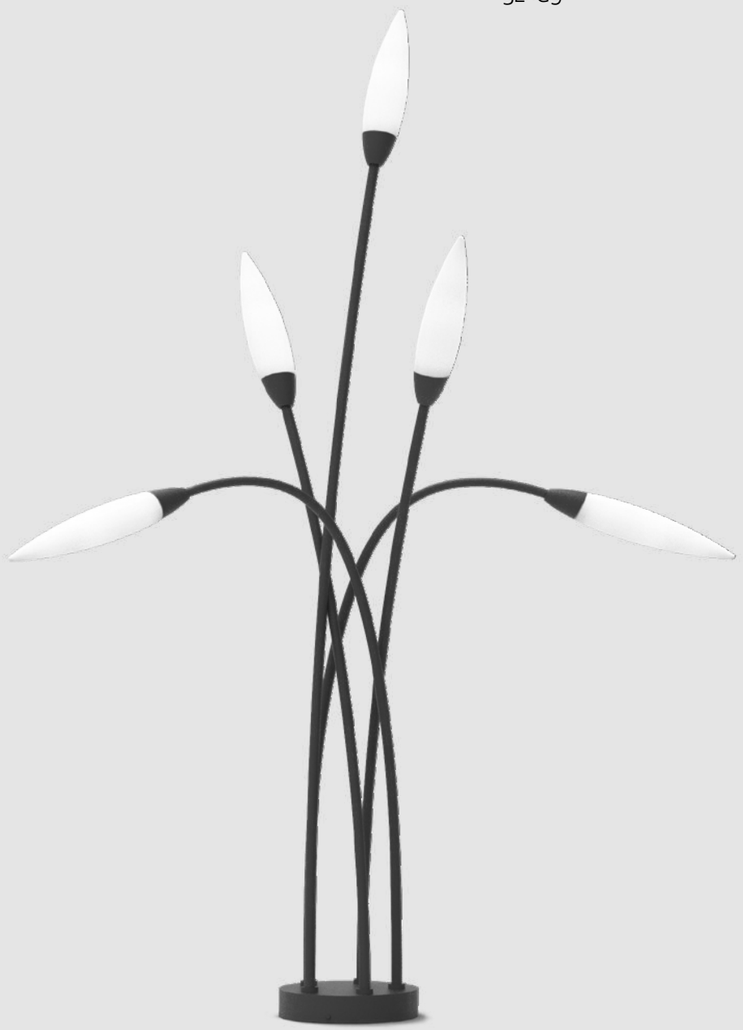

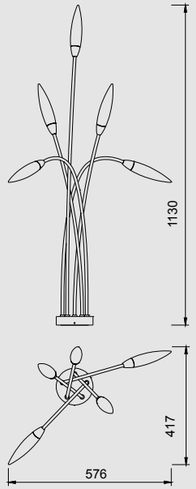

garantia.mantenco.org 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP65

Aluminio-*Aluminium* 100-240V ~ 50/60Hz máx 5W LED

IP65

OAMI 005818614-0001


FLAME

Lámpara de pie-*Floor lamp*

Santiago Sevillano



1400 Blanco-White
4L ×GU10 máx 12W **LED**
1L × E27 máx 20W**LED**






1326
pág. 386

Complementos Exterior-*Outdoor Complements*




TU0652 Piqueta-*Spike*





TU0492 Piqueta-*Spike*



TU0494 Base-*Ground base*





garantía manfrago.org 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP65

PE/Acero-PE/Steel 100-240V ~ 50/60Hz

IP65

OAMI 01793845-0001


FLAME

Santiago Sevillano

MAYA



6550 Gris oscuro-*Dark grey*
1L x E27





6555
pág. 424



6554
pág 358



6551
pág. 306

garantia.mantraco.org 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP54

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx 20W LED

IP54

OAMI 005818614-0004

MAYA

MERIBEL

6490 Grafito-Graphite
1L x E27







6492
pág. 312

garantía manifiesto.org 3 AÑOS WARRANTY GARANTIA

NOT INCLUDED

IP54

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx 20W LED




EVEREST

José Ignacio Ballester

6741 Gris oscuro-*Dark grey*
2L×GX53






6740 Blanco-*White*
2L×GX53



6745 Gris oscuro-*Dark grey*
1L×GX53






6744 Blanco-*White*
1L×GX53




Complementos Exterior-*Outdoor Complements*

TU0492 Piqueta-*Spike*






TU0652 Piqueta-*Spike*



TU0653 Piqueta-*Spike*





6506
pág. 322

garantía mantraco.org 2 YEAR ABOVE WARRANTY GARANTÍA

NOT INCLUDED

IP65

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx 10W LED


EVEREST

José Ignacio Ballester

6743 Gris oscuro-*Dark grey*

2L×GX53



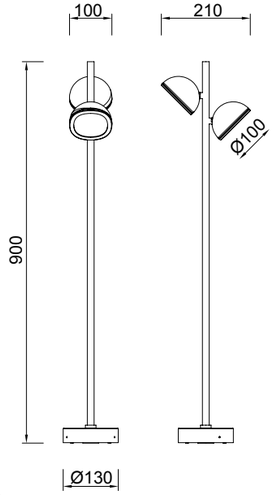

6742 Blanco-*White*


2L×GX53



6747 Gris oscuro-*Dark grey*

1L×GX53



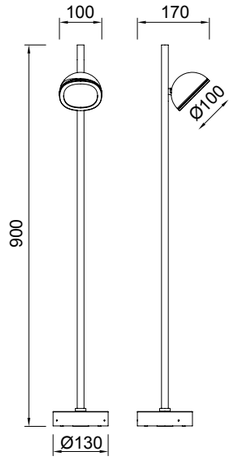


6746 Blanco-*White*

1L×GX53


Complementos Exterior-*Outdoor Complements*

TU0492 Piqueta-*Spike*






TU0652 Piqueta-*Spike*



TU0653 Piqueta-*Spike*



garantía mantenimiento 2 AÑOS WARRANTY GARANTÍA

NOT INCLUDED

IP65

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx 10W LED

IP65

6743


OAMI 005818614-0002

EVEREST

RUKA


6772
Gris Oscuro/Madera-*Dark Grey/Wood*
LED 13W **3000K** 980lm






6773
Gris Oscuro/Madera-*Dark Grey/Wood*
LED 13W **3000K** 980lm





6771
Gris Oscuro/Madera-*Dark Grey/Wood*
LED 13W **3000K** 980lm







6770
pág. 308

LED life / LED vida 30.000 h · ON / OFF 15.000 · garantía mantenimiento de flujo 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP65

Aluminio/PC-*Aluminium/PC* **100-240V**~ 50/60Hz CRI:⩾ 80




TAOS

3000K

IP65


7105 Gris Piedra-*Stone Grey*
LED 6.5W **3000K** 490lm





7106 Gris Piedra-*Stone Grey*
LED 12W **3000K** 905lm







7108
pág. 354

LED life / LED vida 50.000 h · ON / OFF 30.000 · garantía mantenimiento luz 5 años WARRANTY GARANTIA LED · LED INCLUDED · IP65

Cemento liso-*Smooth cement* 220-240V~ 50/60Hz CRI≥ 80




TAOS

Foco suelo superficie exterior-*Outdoor* surface *floor lamp*

IP65

7107 Gris Piedra-*Stone Grey*
1L x GU10 (no incl.)



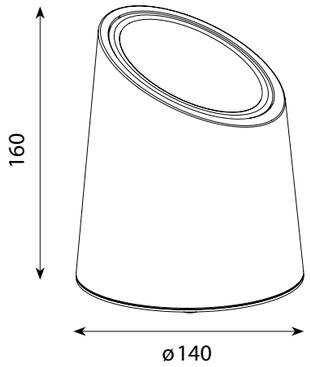

NOT INCLUDED

IP65

Cemento liso-*Smooth cement* 100-240V~ 50/60Hz GU10 máx.12W Led



POLINESIA


Santiago Sevillano

IP44

7130 Beige oscuro-Dark *beige*

1L x E27 (no incl.)



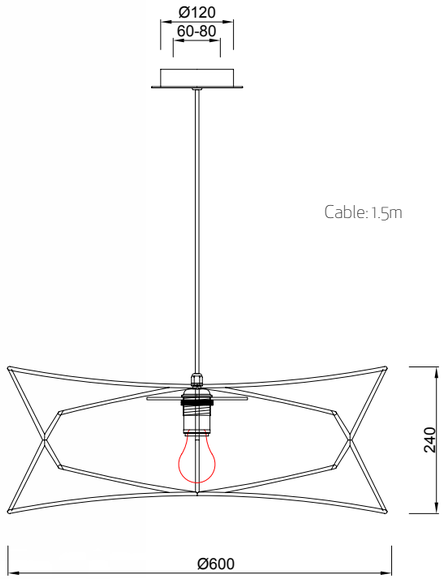

Cable: 1.5m



7138
pág. 390



7134
pág. 368



7133
pág. 304

garantía mantraco.com 2 YEAR WARRANTY GARANTIA

NOT INCLUDED

IP44

Aluminio/fibra textil sintética-*Aluminium/synthetic textile fibre* 100-240V~ 50/60Hz E27 máx.20W Led



Registered **Nº 007663331-0007**


POLINESIA

Santiago Sevillano

IP44

7131 Beige oscuro-Dark *beige*

1L x E27 (no incl.)

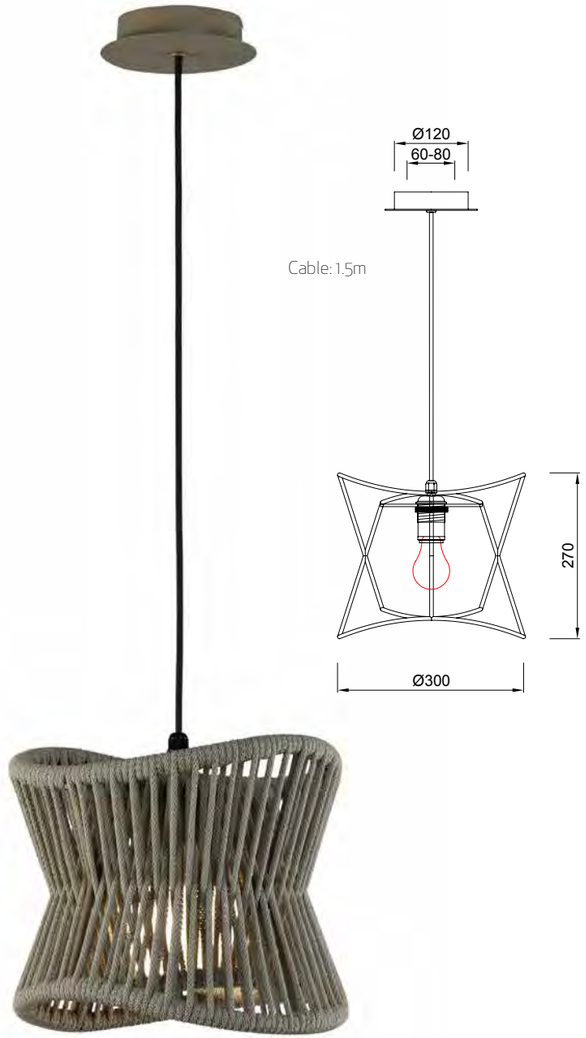

garantía manufacturer 2 años WARRANTY GARANTÍA

NOT INCLUDED

IP44

Aluminio/fibra textil sintética-*Aluminium/synthetic textile fibre* 100-240V~ 50/60Hz E27 máx.20W Led




Registered Nº 007663331-0007

KINKÉ

Santolaria & Lluscà



6212
Blanco/Gris antracita
White/*Gray Anthracite*
1 x E27 máx.20W LED



garantia mantraco.org 2 YEAR ABOVE WARRANTY GARANTÍA

NOT INCLUDED

IP44

ABS/PE/*Aluminium* 100-240V ~ 50/60Hz OAMI 004721413-023 / 024 / 025



KINKÉ


Santolaria & Lluscà

KINKÉ

Santolaria & Lluscà



6211
Blanco/Gris antracita
White/*Gray Anthracite*
1 x E27 máx.20W LED




garantía manufacturer 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP44

ABS/PE/*Aluminium* 100-240V ~ 50/60Hz OAMI 004721413-023 / 024 / 025

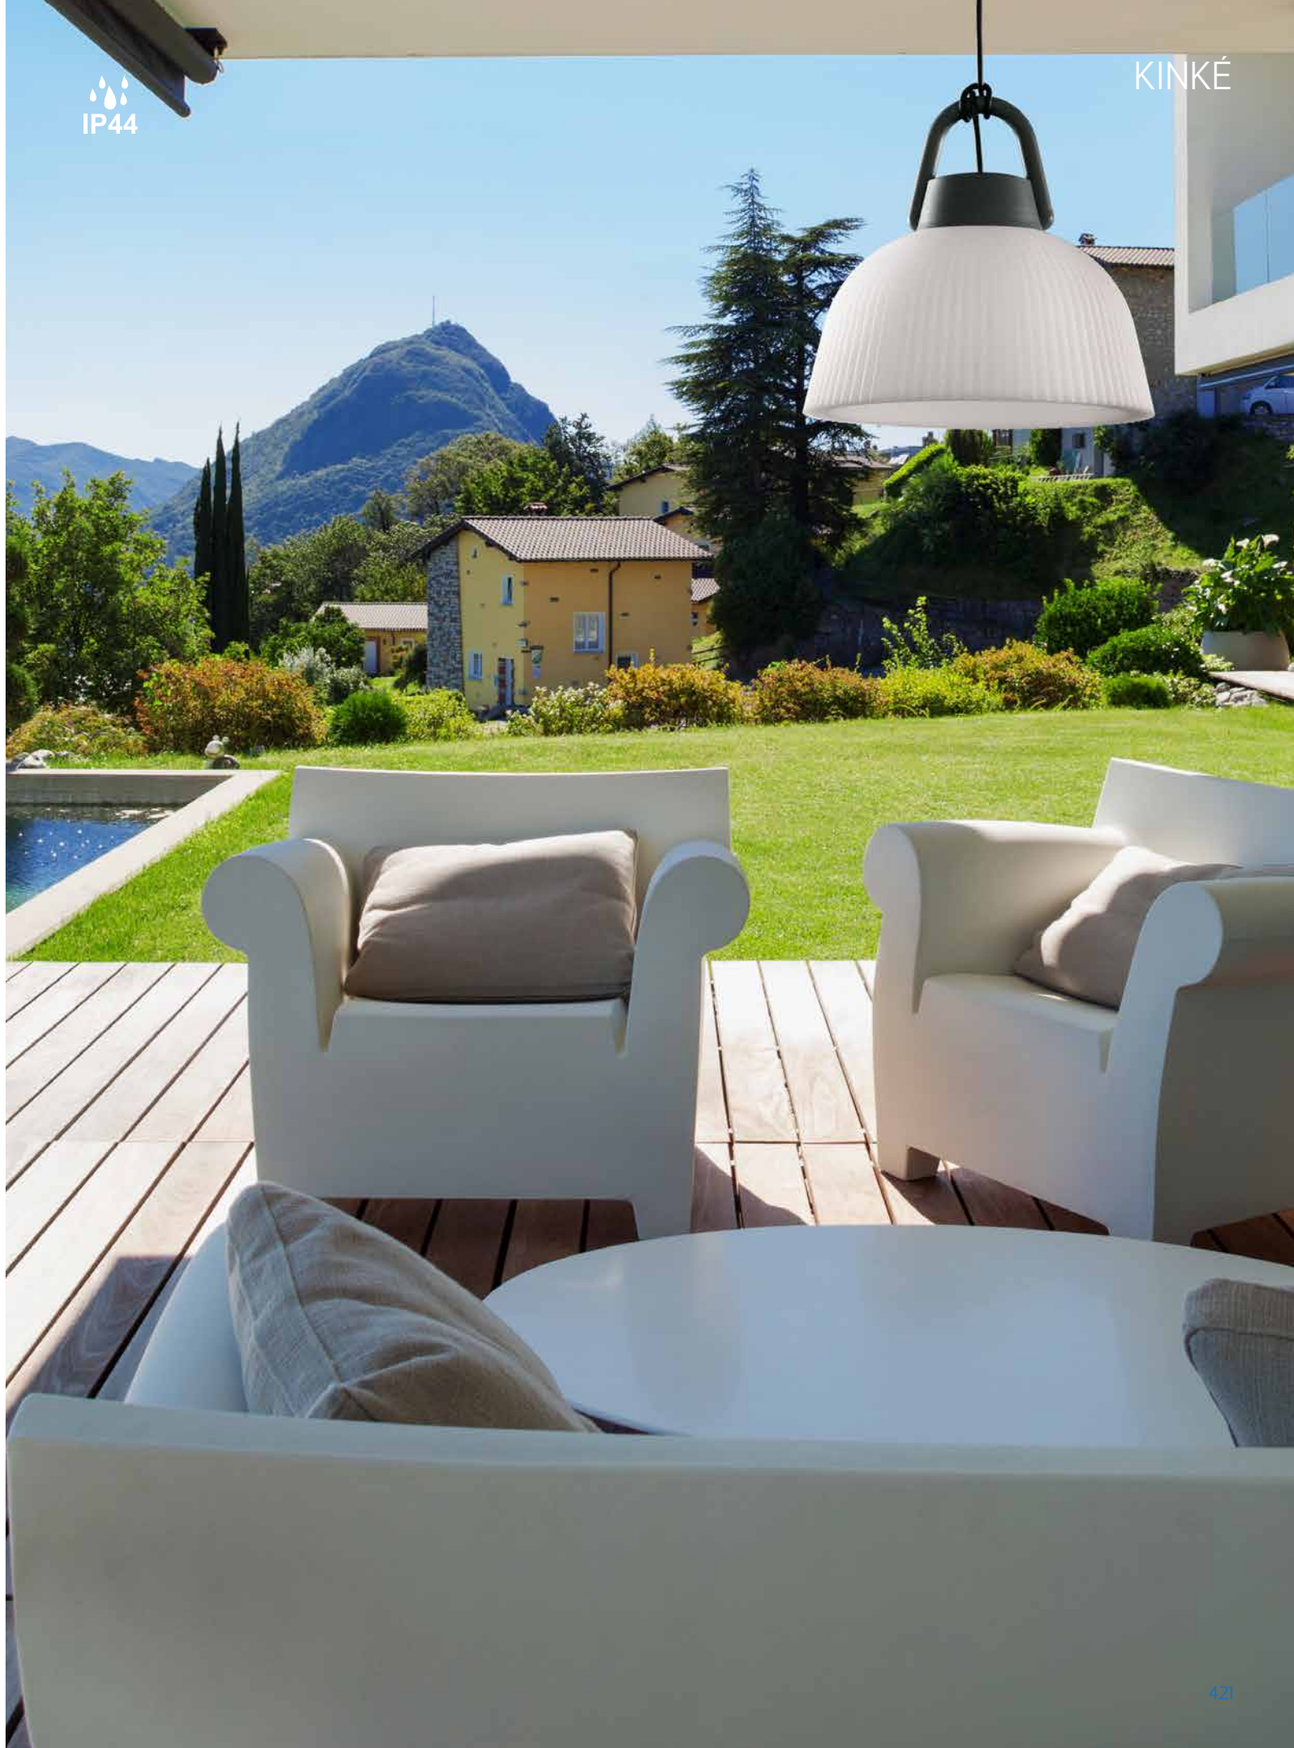


KINKÉ

Santolaria & Lluscà




6213 Blanco/Gris antracita-*White/Gray Anthracite*

1 x E27 máx.20W LED




6215 Peana-*Base*

Gris antracita/*Gray Anthracite*

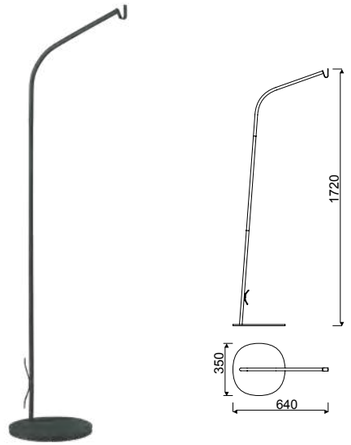

6214 Gancho-*Hook*

Gris antracita/*Gray Anthracite*




6218 Peana-Base

Acero Inoxidable-Base mármol negro

Stainless Steel-Black marble base



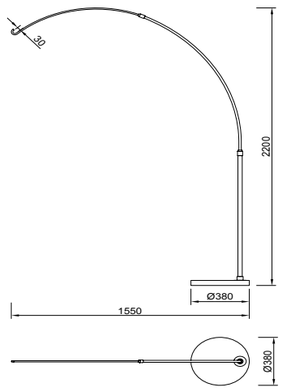


garantía manufacturer 2 YEAR WARRANTY GARANTÍA

NOT INCLUDED

IP65

ABS/PE/*Aluminium* 100-240V ~ 50/60Hz OAMI 004721413-023 / 024 / 025

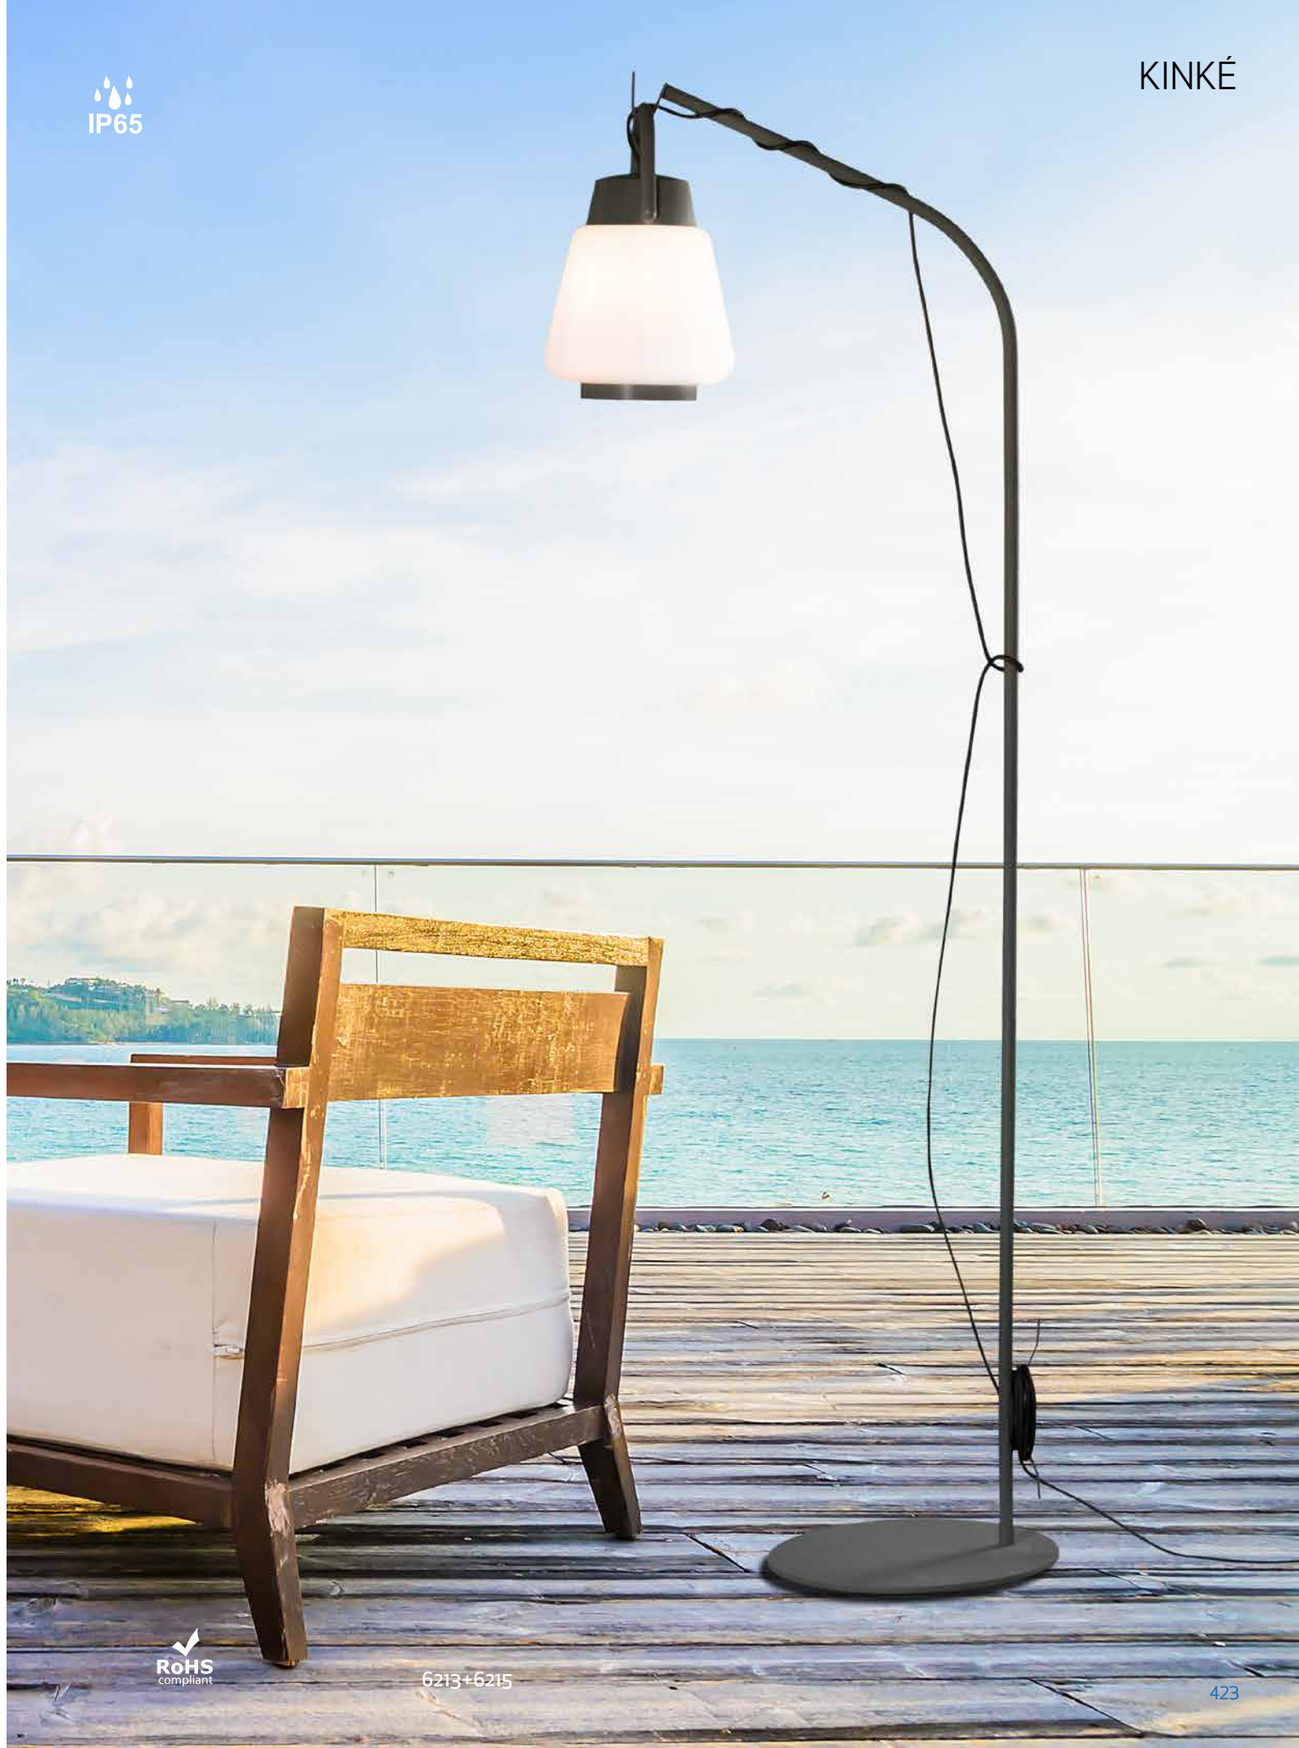


MAYA

Colgante exterior-*Pendant outdoor*



6555 Gris oscuro-*Dark grey*
1L x E27




6550
pág. 400


6551
pág. 306


6553
pág. 358

garantía mantraco.org 2 YEAR ANOS WARRANTY GARANTÍA

NOT INCLUDED

IP54

Aluminio/cristal-*Aluminium/glass* 100-240V ~ 50/60Hz máx. 20 W LED


IP54

OAMI 005818614-0006


MAYA

AVORIAZ


1397 Blanco-*White*
1L x E27

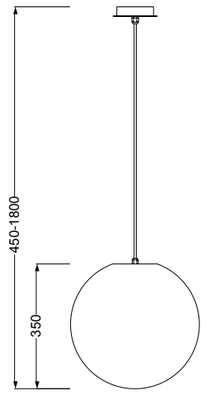

1398 Blanco-*White*
1L x E27

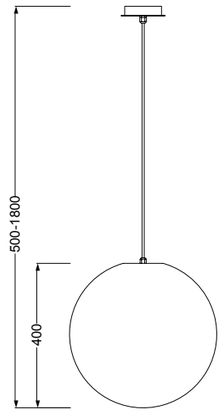

1399 Blanco-*White*
1L x E27

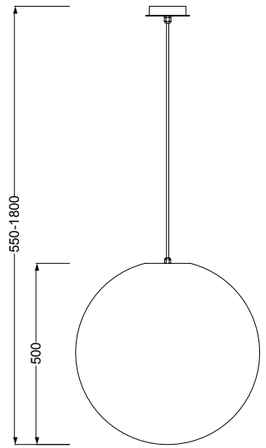





1388
pág. 388

garantia.manfrotto.org 2 YEAR WARRANTY GARANTIA

NOT INCLUDED

IP44

PE / ABS / Aluminio-*PE / ABS / Aluminium* 100-240V ~ 50/60Hz máx. 20 W **LED**

IP44

AVORIAZ

BAKER


3000K

7011 Gris Oscuro-Dark*Grey*
LED 3W 210lm



7012 Blanco Arena-Sanded *White*
LED 3W 210lm





7640 Corten-*Corten*
LED 3W 210lm





7015 Gris Oscuro-Dark*Grey*
LED 6W 420lm




7016 Blanco Arena-Sanded *White*
LED 6W 420lm



7642 Corten-*Corten*
LED 6W 420lm









Aluminio/PC-*Aluminium/PC* 200-240V~ 50/60Hz

BAKER

3000K

7013 Gris Oscuro-Dark*Grey*
LED 3W 210lm



7014 Blanco Arena-Sanded *White*
LED 3W 210lm




7641 Corten-*Corten*
LED 3W 210lm



7017 Gris Oscuro-Dark*Grey*
LED 6W 420lm




7018 Blanco Anera-Sanded *White*
LED 6W 420lm

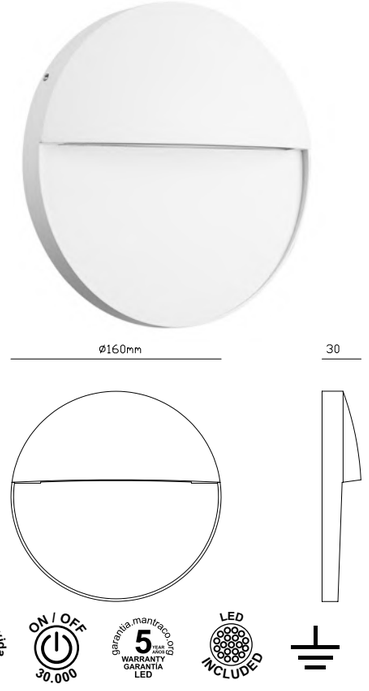

7643 Corten-*Corten*
LED 6W 420lm



Aluminio/PC-Aluminium/PC 200-240V~ 50/60Hz

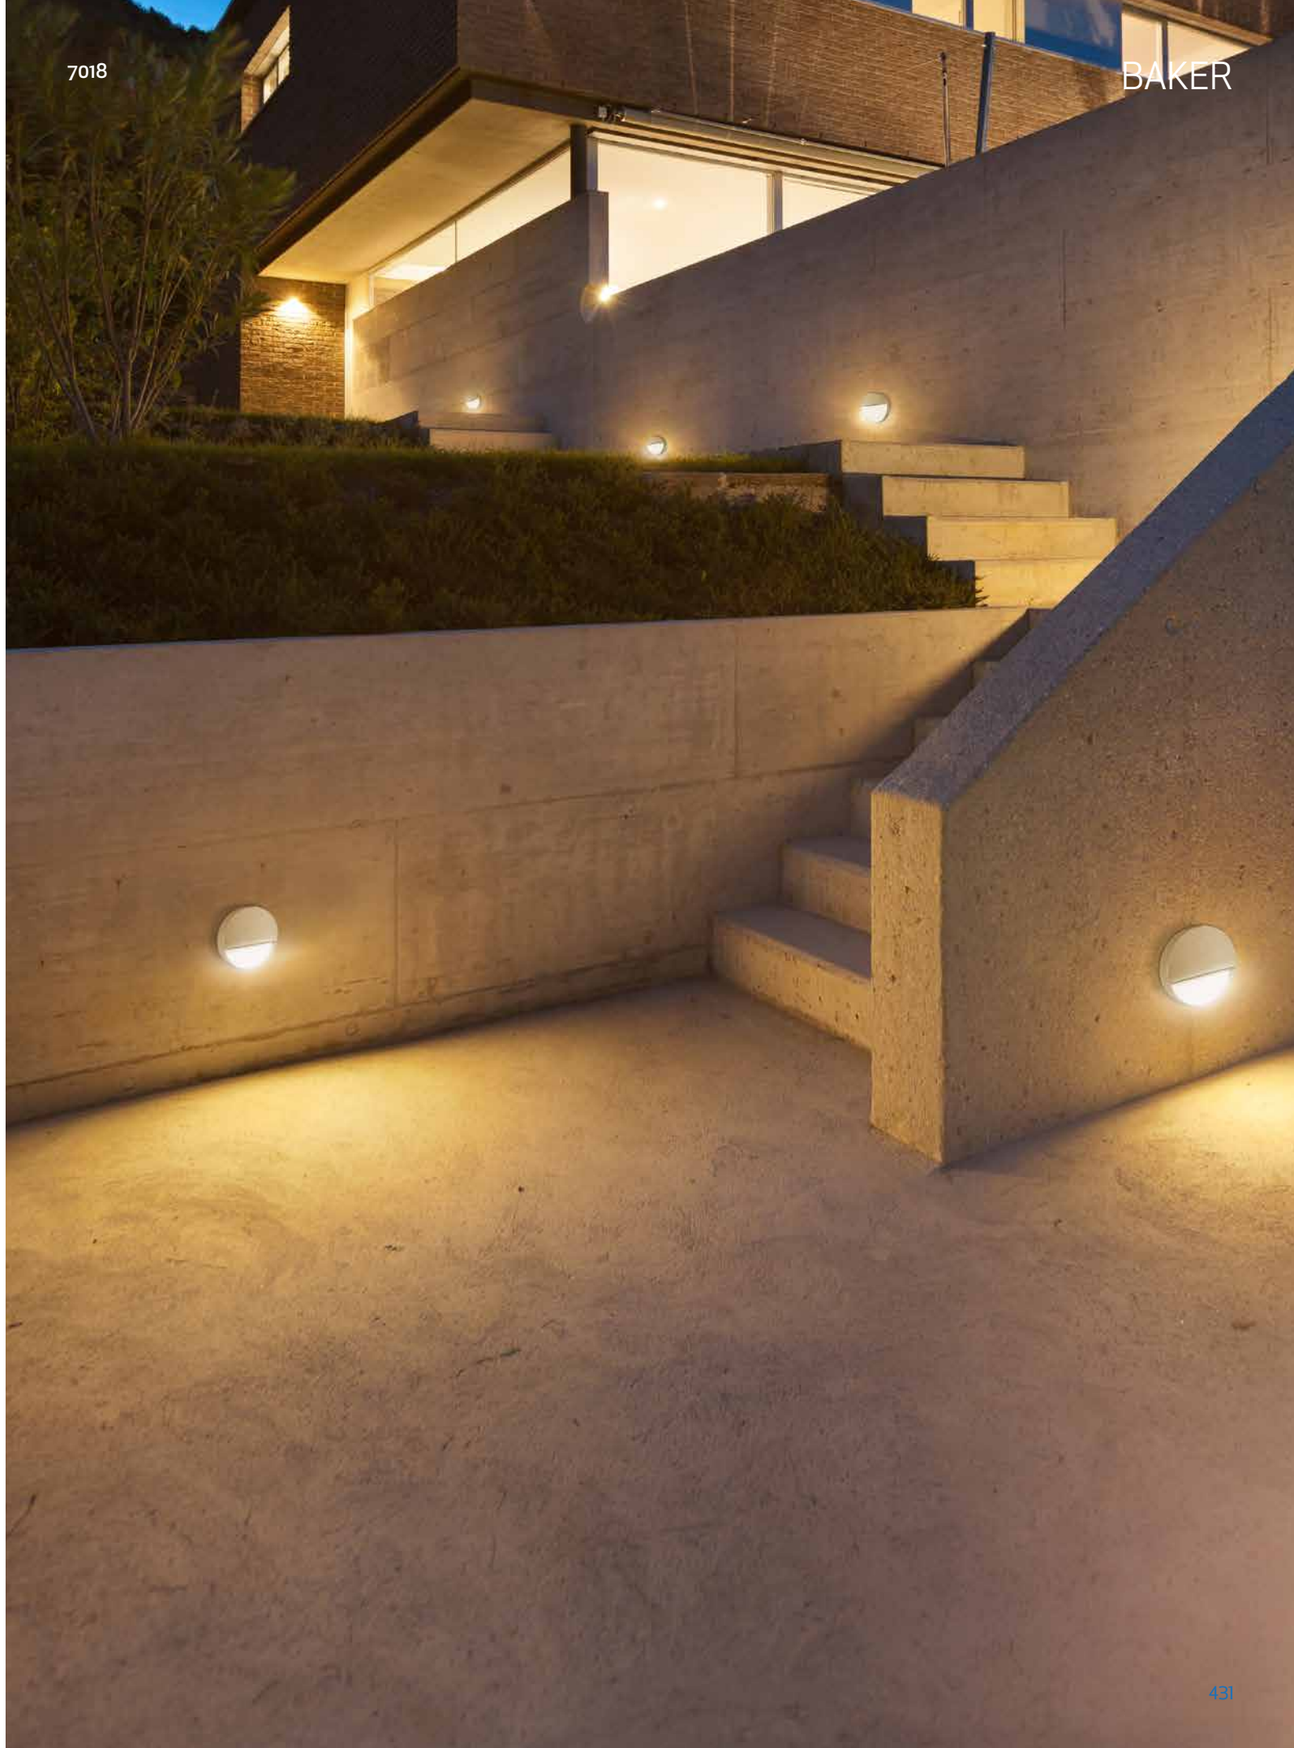

ASPEN

3000K

7021 Gris Oscuro-Dark*Grey*
LED 3W 210lm


7022 Negro Arena-Sanded *Black*
LED 3W 210lm

7023 Blanco Arena-Sanded *White*
LED 3W 210lm


7024 Gris Oscuro-Dark*Grey*
LED 3W 210lm

7025 Negro Arena-Sanded *Black*
LED 3W 210lm


7026 Blanco Anera-Sanded *White*
LED 3W 210lm

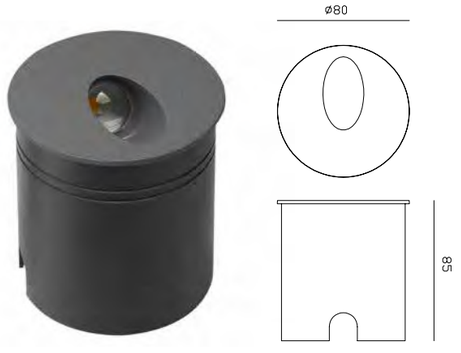





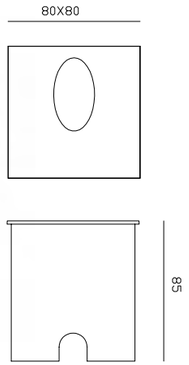


LUMINOUS INTENSITY DISTRIBUTION DIAGRAM













LUMINOUS INTENSITY DISTRIBUTION DIAGRAM









* Modos Instalación-*Installation Forms*



Con tubo carcasa-*Recessed tube housing*

76mm




Con pinzas-*With clamps*

74mm

LED life / LED vida 30.000 h
ON / OFF 30.000
garantía mantenga.org 5 AÑOS WARRANTY GARANTÍA LED
LED INCLUDED
IP65

Aluminio/PC-*Aluminium/PC* 200-240V~ 50/60Hz

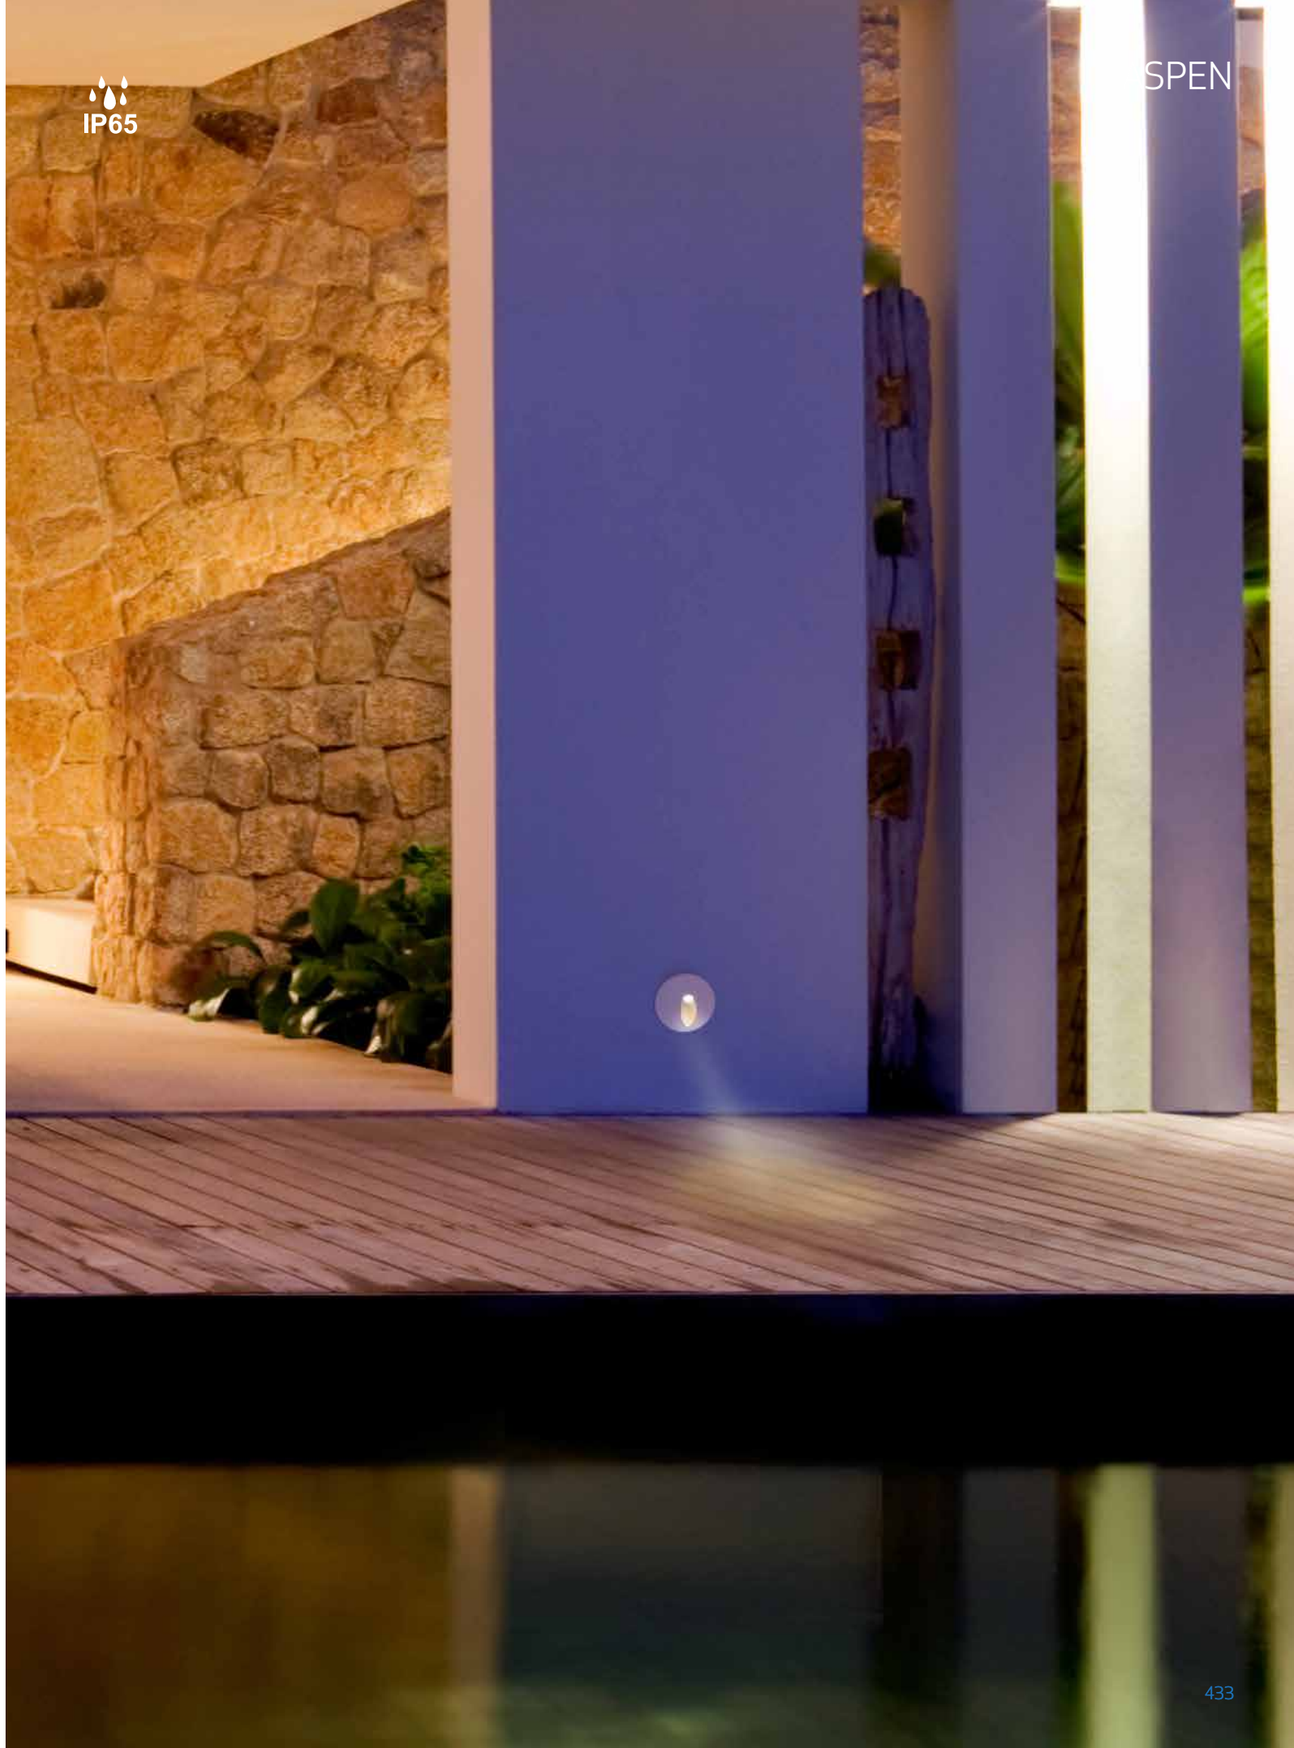

ASPEN


3000K

7027 Gris Oscuro-Dark*Grey*
LED 3W 210lm


7028 Negro Arena-Sanded *Black*
LED 3W 210lm


7029 Blanco Arena-Sanded *White*
LED 3W 210lm



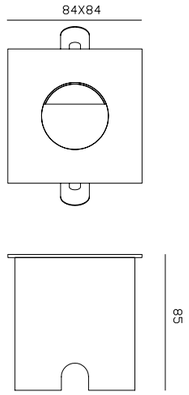

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM






7030 Gris Oscuro-Dark*Grey*
LED 3W 210lm


7031 Negro Arena-Sanded *Black*
LED 3W 210lm


7032 Blanco Anera-Sanded *White*
LED 3W 210lm



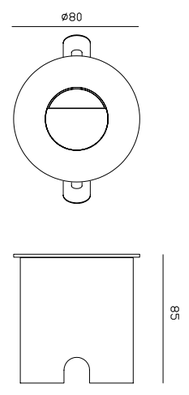

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM





* Modos Instalación-*Installation Forms*



Con tubo carcasa-*Recessed tube housing*






Con pinzas-*With clamps*





Aluminio/PC-*Aluminium/PC* 200- 240V~ 50/60Hz

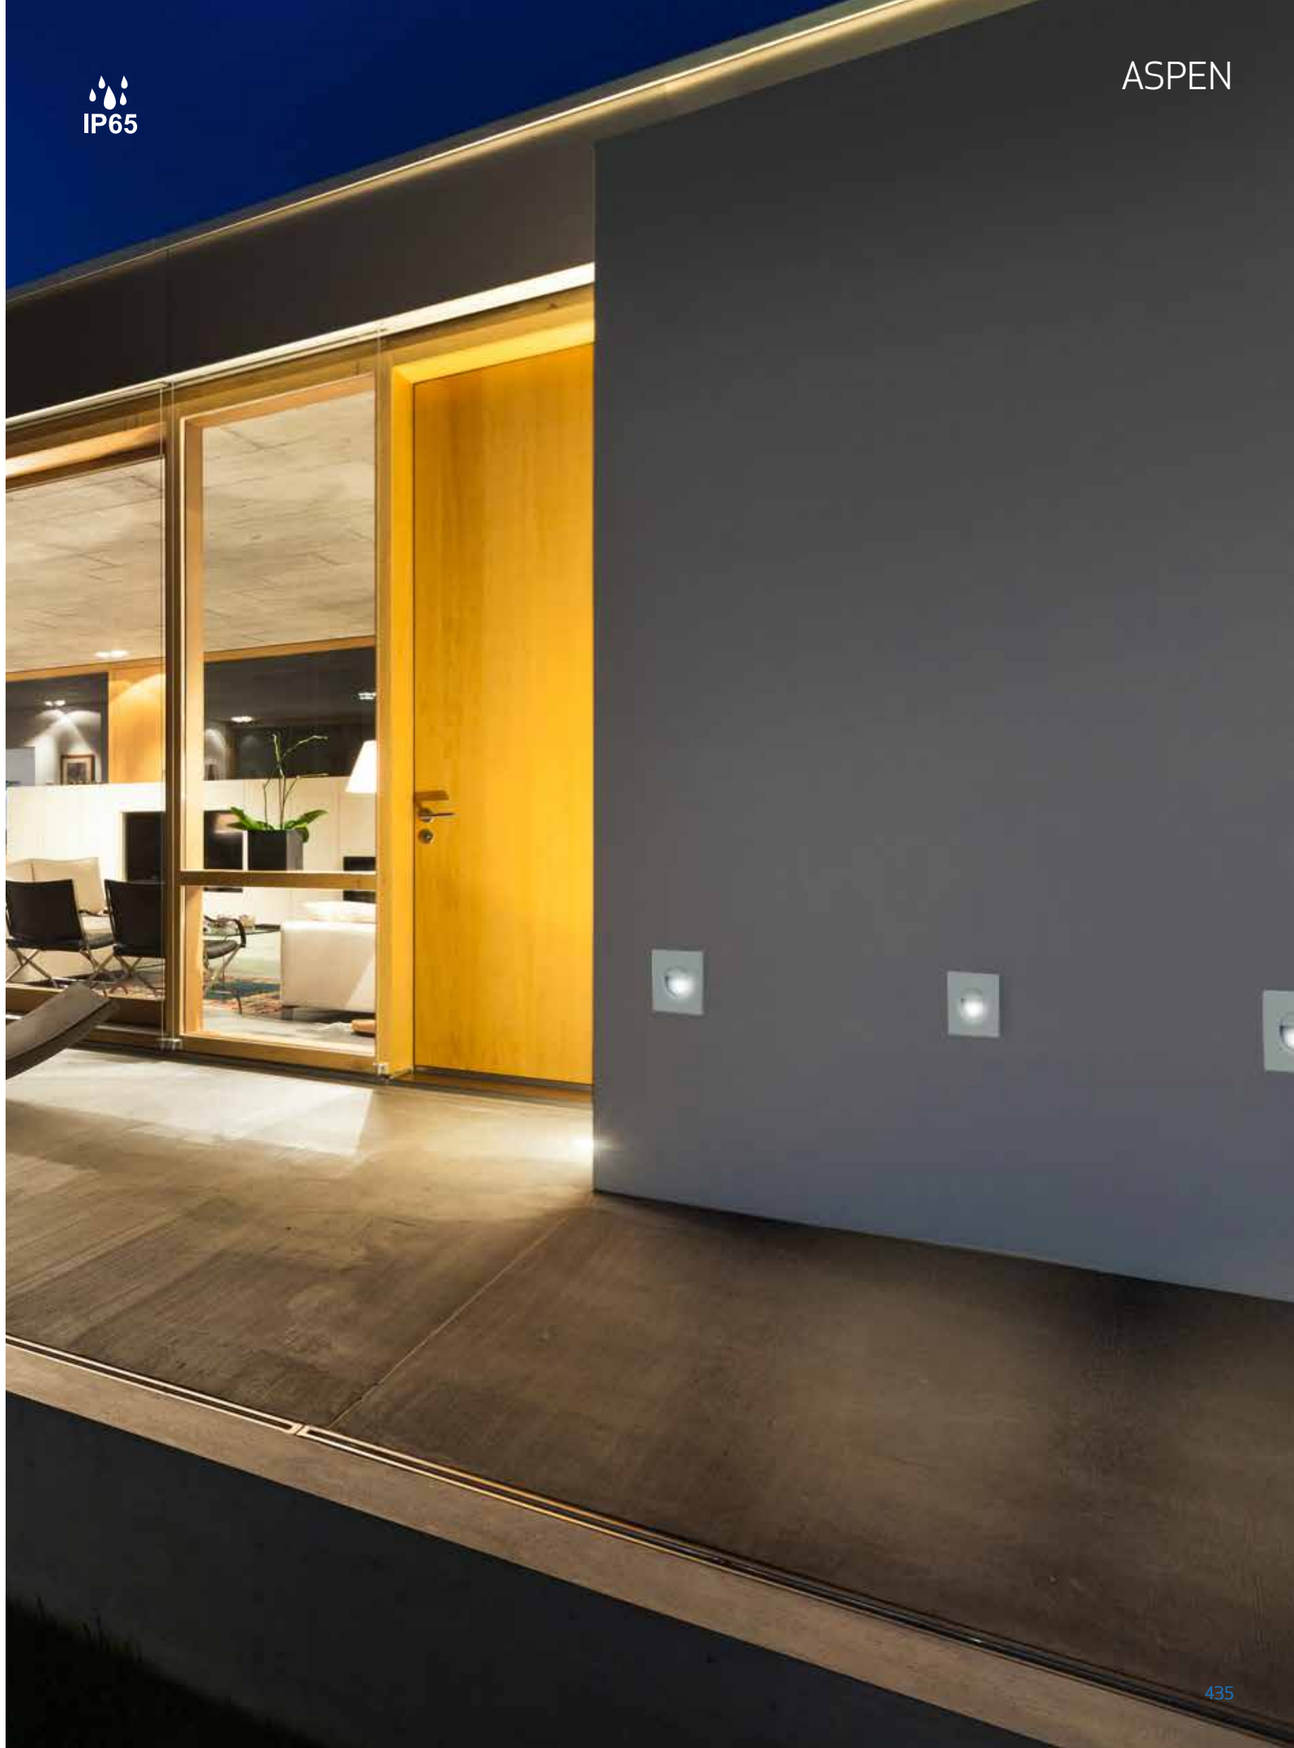

LED G9 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 12mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 30W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 12mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 30W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





2.5W G9 230 Lumen

Item No.	R09184	R09185
Potencia nominal/Wattage(W)	2.5	
Temperatura de color/CCT(K)	2700K	5000K
Flujo luminoso/Luminous Flux(lm)	220	230
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	YES	
CRI	≥80	
Casquillo/Lamp Head	G9	
Angulo/Beam Angle(deg)	360°	
Material	PC	
Dimensiones/Dimensions(mm)	Φ16*48	

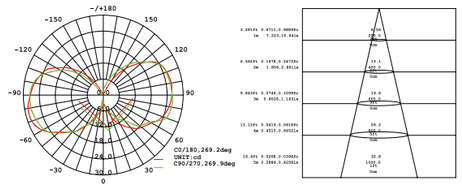

LED G9 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 10mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 30W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50Hz 10mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 30W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






2.5W G9 250 Lumen

Item No.	R09226	R09227
Potencia nominal/Wattage(W)	2.5	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	240	250
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	G9	
Angulo/Beam Angle(deg)	360°	
Material	Cristal / Glass	
Dimensiones/Dimensions(mm)	Φ14*48	





LED G4 Bulb


Caracteristicas

- Voltaje:AC/DC 12V 140mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 20W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC/DC 12V 140mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 20W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






2W G4 190 Lumen

Item No.	R09209	R09210
Potencia nominal/Wattage(W)	2	
Temperatura de color/CCT(K)	3000K	5000K
Flujo luminoso/Luminous Flux(lm)	190	
Tension nominal/Votage(V)	AC/DC 12V	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	G4	
Angulo/Beam Angle(deg)	240°	
Material	PC	
Dimensiones/Dimensions(mm)	Φ13*36	





LED G4 Bulb


Caracteristicas

- Voltaje:AC/DC 12V 345mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 20W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC/DC 12V 345mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 20W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






5W G4 500 Lumen

Item No.	R09243	R09247
Potencia nominal/Wattage(W)	5	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	500	
Tension nominal/Votage(V)	AC/DC 12V	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	G4	
Angulo/Beam Angle(deg)	360°	
Material	PCB&Ceramic	





LED G4 Bulb


Caracteristicas

* Voltaje:AC/DC 12V 140mA
* 20,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 20W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features


* Voltage: AC/DC 12V 140mA
* 20,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 20W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting





2W G4 190 Lumen

Item No.	R09209	R09210
Potencia nominal/Wattage(W)	2	
Temperatura de color/CCT(K)	3000K	5000K
Flujo luminoso/Luminous Flux(lm)	190	
Tension nominal/Votage(V)	AC/DC 12V	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	G4	
Angulo/Beam Angle(deg)	240°	
Material	PC	
Dimensiones/Dimensions(mm)	Φ13*36	

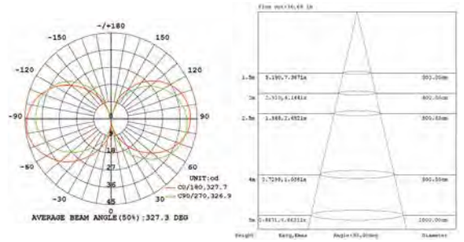

LED GU10 Bulb


Caracteristicas

* Voltaje:AC 220-240V 50/60Hz 80mA
* 25,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 90W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features


* Voltage: AC 220-240V 50/60Hz 80mA
* 25,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 90W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting





Dimmable
9W GU10 820 Lumen

Item No.	R09218	R09219	R09220
Potencia nominal/Wattage(W)	9		
Temperatura de color/CCT(K)	3000K	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	800	800	820
Tension nominal/Votage(V)	AC 220-240V 50/60Hz		
Regulable/Dimmable	YES	NO	NO
CRI	≥80		
Casquillo/Lamp Head	GU10		
Angulo/Beam Angle(deg)	50°		
Material	Aluminio+PC/Aluminum+PC		
Dimensiones/Dimensions(mm)	Φ50*74		

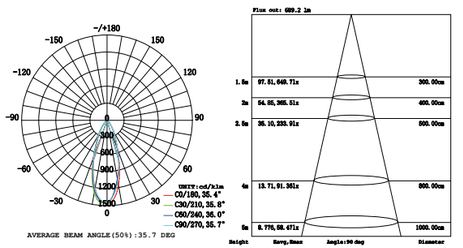

LED G4 Bulb


Caracteristicas

* Voltaje:AC/DC 12V 345mA
* 20,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 20W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features


* Voltage: AC/DC 12V 345mA
* 20,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 20W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting





5W G4 500 Lumen

Item No.	R09243	R09247
Potencia nominal/Wattage(W)	5	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	500	
Tension nominal/Votage(V)	AC/DC 12V	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	G4	
Angulo/Beam Angle(deg)	360°	
Material	PCB&Ceramic	
Dimensiones/Dimensions(mm)	Φ18.7*57	

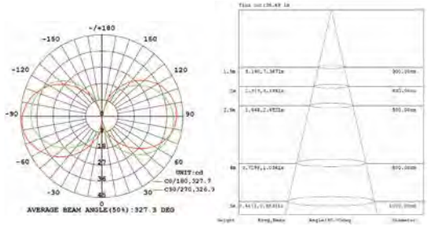

LED GU10 Bulb


Caracteristicas

* Voltaje:AC 220-240V 50/60Hz 40mA
* 20,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 35W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features


* Voltage: AC 220-240V 50/60Hz 40mA
* 20,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 35W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting





4W GU10 360 Lumen

Item No.	R09207
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	3000K
Flujo luminoso/Luminous Flux(lm)	360
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	GU10
Angulo/Beam Angle(deg)	360°
Material	Aluminio+PC/Aluminum+PC
Dimensiones/Dimensions(mm)	Φ29*81

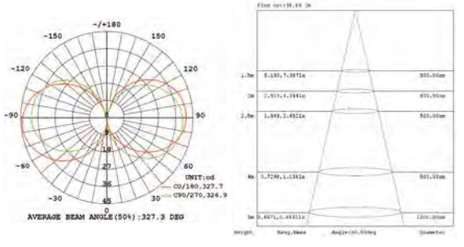

LED GU10 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 60mA
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 80W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz 60mA
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 80W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






8W LED ⟷ **80W** Incandescent lamp (Lux.)



8W GU10 641 Lumen

Item No.	R09156	R09157
Potencia nominal/Wattage(W)	8	
Temperatura de color/CCT(K)	3000K	5000K
Flujo luminoso/Luminous Flux(lm)	641	
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	GU10	
Angulo/Beam Angle(deg)	60°	
Material	Aluminio&PC / Aluminum&PC	
Dimensiones/Dimensions(mm)	Φ50*58	

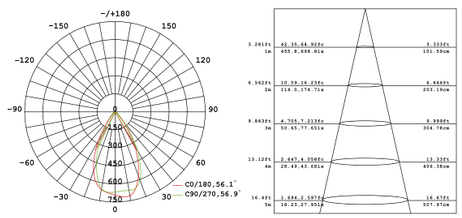

LED GU10 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 50mA
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 60W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz 50mA
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 60W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






6W LED ⟷ **60W** Incandescent lamp (Lux.)



6W GU10 515 Lumen

Item No.	R09158	R09159
Potencia nominal/Wattage(W)	6	
Temperatura de color/CCT(K)	3000K	5000K
Flujo luminoso/Luminous Flux(lm)	484	515
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	GU10	
Angulo/Beam Angle(deg)	60°	
Material	Aluminio&PC / Aluminum&PC	
Dimensiones/Dimensions(mm)	Φ50*58	

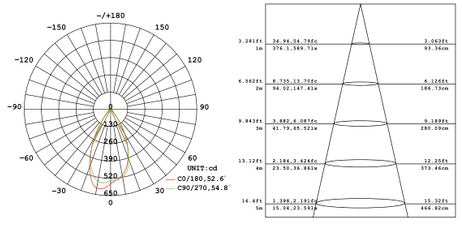

LED E14 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 35mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 40W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz 35mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 40W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






4W LED ⟷ **40W** Incandescent lamp (Lux.)



4W E14 470 Lumen

Item No.	R09115
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	2700K
Flujo luminoso/Luminous Flux(lm)	470
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E14
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ35*95

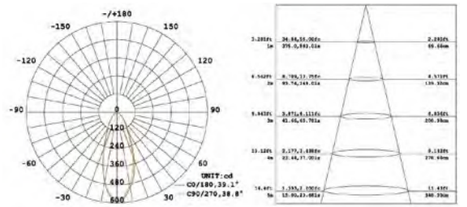

LED E14 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 35mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 40W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz 35mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 40W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






4W LED ⟷ **40W** Incandescent lamp (Lux.)



4W E14 340 Lumen

Item No.	R09208
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	340
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E14
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ35*95

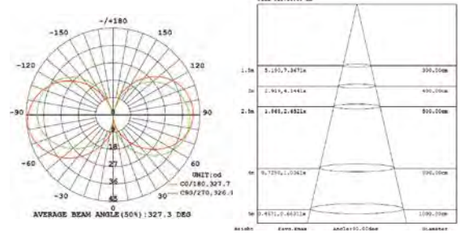

LED E14 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 35mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 40W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 35mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 40W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





4W E14 470 Lumen

Item No.	R09115
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	2700K
Flujo luminoso/Luminous Flux(lm)	470
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E14
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ35*95

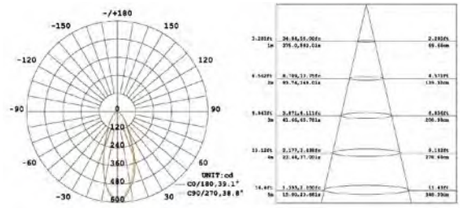

LED E14 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 35mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 40W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 35mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 40W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





4W E14 470 Lumen

Item No.	R09114
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	2700K
Flujo luminoso/Luminous Flux(lm)	470
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E14
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ45*78

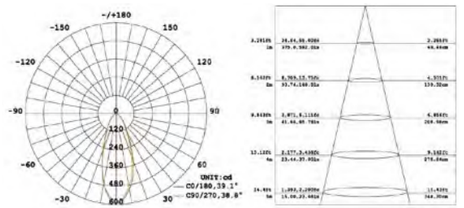

LED E14 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 35mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 40W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 35mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 40W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





4W E14 340 Lumen

Item No.	R09208
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	340
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E14
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ35*95

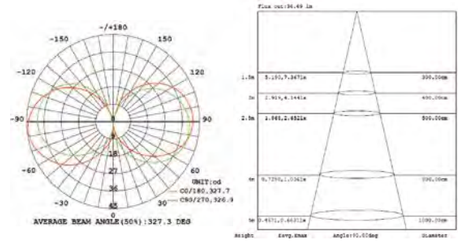

LED E14 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 35mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 40W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 35mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 40W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





4W E14 470 Lumen

Item No.	R09116
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	2700K
Flujo luminoso/Luminous Flux(lm)	470
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E14
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ35*130

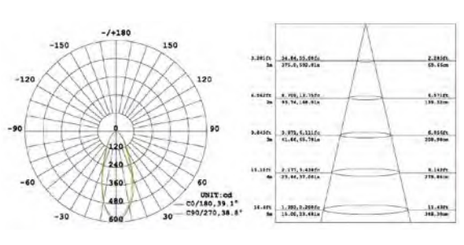

LED E14 Bulb

Caracteristicas

* Voltaje:AC 220-240V 50/60Hz 45mA
* 25,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 55W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion


Features

* Voltage: AC 220-240V 50/60Hz 45mA
* 25,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 55W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting






5.5W LED ⟷ 55W Incandescent lamp (Lux.)



5.5W E14 490 Lumen

Item No.	R09117	R09221	R09118
Potencia nominal/Wattage(W)		5.5	
Temperatura de color/CCT(K)	3000K	4000K	5000K
Flujo luminoso/Luminous Flux(lm)	470	480	490
Tension nominal/Votage(V)		AC 220-240V 50/60Hz	
Regulable/Dimmable		NO	
CRI		≥80	
Casquillo/Lamp Head		E14	
Angulo/Beam Angle(deg)		140°	
Material		Aluminio+PC+Cristal/Aluminum+PC+Glass	
Dimensiones/Dimensions(mm)		Φ45*82	

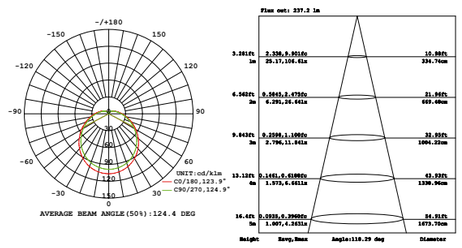

LED E14 Bulb

Caracteristicas

* Voltaje:AC 220-240V/50Hz 55mA
* 15,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 65W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion


Features

* Voltage: AC 220-240V/50Hz 55mA
* 15,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 65W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting






6.5W LED ⟷ 65W Incandescent lamp (Lux.)



6.5W E14 800 Lumen

Item No.	R09239	R09240
Potencia nominal/Wattage(W)	6.5	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	790	800
Tension nominal/Votage(V)	AC 220-240V/50Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E14	
Angulo/Beam Angle(deg)	360°	
Material	Aluminio+Cristal/Aluminum+Glass	
Dimensiones/Dimensions(mm)	Φ45*78	

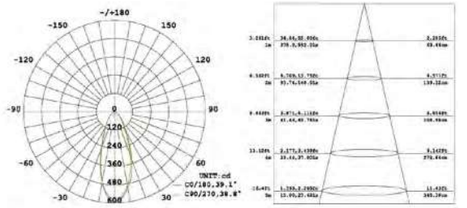

LED E14 Bulb

Caracteristicas

* Voltaje:AC 220-240V 50/60Hz 35mA
* 25,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 55W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion


Features

* Voltage: AC 220-240V 50/60Hz 35mA
* 25,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 55W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting






4W LED ⟷ 55W Incandescent lamp (Lux.)



4W E14 470 Lumen

Item No.	R09241	R09242
Potencia nominal/Wattage(W)	4	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	470	485
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E14	
Angulo/Beam Angle(deg)	360°	
Material	Aluminio+PC+Cristal/Aluminum+PC+Glass	
Dimensiones/Dimensions(mm)	Φ35*95	

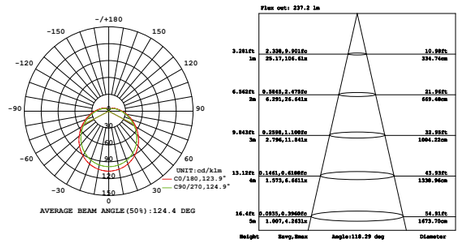

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 55mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 100W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 55mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 100W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





10W E27 1050 Lumen

Item No.	R09133	R09215	R09134
Potencia nominal/Wattage(W)		10	
Temperatura de color/CCT(K)	3000K	4000K	5000K
Flujo luminoso/Luminous Flux(lm)	1050	1080	1100
Tension nominal/Votage(V)		AC 220-240V 50/60Hz	
Regulable/Dimmable		NO	
CRI		≥80	
Casquillo/Lamp Head		E27	
Angulo/Beam Angle(deg)		320°	
Material		Aluminio+PC/Aluminum+PC	
Dimensiones/Dimensions(mm)		Φ60*112	

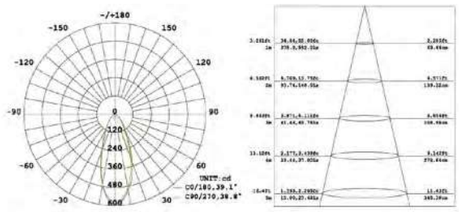

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 80W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 80W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





8W E27 630 Lumen

Item No.	R09142	R09222
Potencia nominal/Wattage(W)	8	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	630	660
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	240°	
Material	Aluminio+PC/Aluminum+PC	
Dimensiones/Dimensions(mm)	Φ55*103	

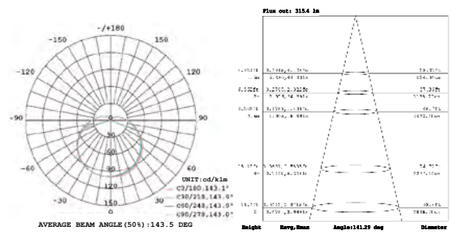

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 75mA
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 55W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 75mA
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 55W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





9W E27 1055 Lumen

Item No.	R09234	R09235
Potencia nominal/Wattage(W)	9	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	1055	1090
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	140°	
Material	Cristal+PC+Metal/Glass+PC+Metal	
Dimensiones/Dimensions(mm)	Φ60*106	

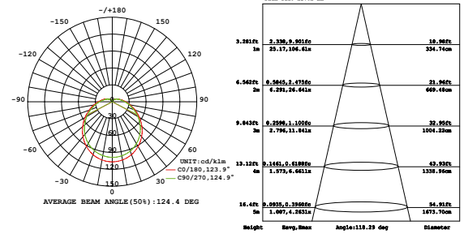

LED E27 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 45mA
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 55W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 45mA
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 55W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





5.5W E27 490 Lumen

Item No.	R09135	R09223	R09136
Potencia nominal/Wattage(W)	5.5		
Temperatura de color/CCT(K)	3000K	4000K	5000K
Flujo luminoso/Luminous Flux(lm)	470	480	490
Tension nominal/Votage(V)	AC 220-240V 50/60Hz		
Regulable/Dimmable	NO		
CRI	≥80		
Casquillo/Lamp Head	E27		
Angulo/Beam Angle(deg)	140°		
Material	Cristal+PC+Metal/Glass+PC+Metal		
Dimensiones/Dimensions(mm)	Φ45*78		

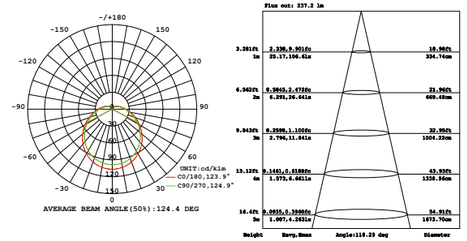

LED E27 Bulb

Caracteristicas


* Voltaje:AC 220-240V 50/60Hz 56mA
* 15,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 70W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features

* Voltage: AC 220-240V 50/60Hz 56mA
* 15,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 70W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting








7W E27 800 Lumen

Item No.	R09131	R09211
Potencia nominal/Wattage(W)	7	
Temperatura de color/CCT(K)	2700K	4000K
Flujo luminoso/Luminous Flux(lm)	800	800
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	360°	
Material	Cristal / Glass	
Dimensiones/Dimensions(mm)	Φ60*106	

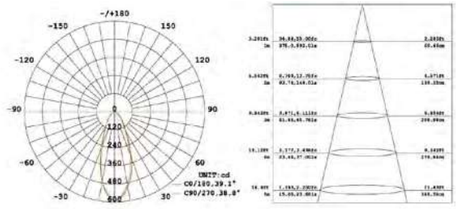

LED E27 Bulb

Caracteristicas


* Voltaje:AC 220-240V 50/60Hz 35mA
* 15,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 40W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features

* Voltage: AC 220-240V 50/60Hz 35mA
* 15,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 40W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting








4W E27 470 Lumen

Item No.	R09132
Potencia nominal/Wattage(W)	4
Temperatura de color/CCT(K)	2700K
Flujo luminoso/Luminous Flux(lm)	470
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Cristal / Glass
Dimensiones/Dimensions(mm)	Φ45*73

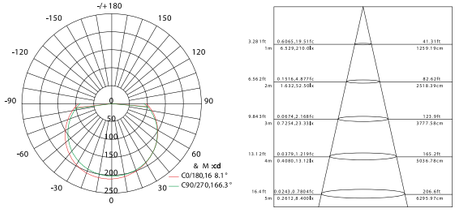

LED E27 Bulb

Caracteristicas


* Voltaje:AC 220-240V/50Hz 55mA
* 15,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 65W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features

* Voltage: AC 220-240V/50Hz 55mA
* 15,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 65W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting








6.5W E27 800 Lumen

Item No.	R09237	R09238
Potencia nominal/Wattage(W)	6.5	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	790	800
Tension nominal/Votage(V)	AC 220-240V/50Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	360°	
Material	Aluminio+Cristal/Aluminum+Glass	
Dimensiones/Dimensions(mm)	Φ45*73	

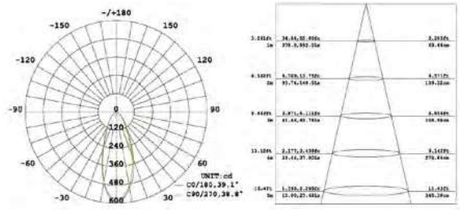

LED E27 Bulb

Caracteristicas


* Voltaje:AC 110-240V 50/60Hz 70mA
* 15,000 hrs. vida util
* Encendido instantaneo con potencia total
* Perfecta para reemplazar la lampara incandescente de 75W
* Baja temperatura al tacto
* Libre de mercurio, Libre de emision UV & IR
* Esta lampara no es idonea para la iluminacion de acentuacion

Features

* Voltage: AC 110-240V 50/60Hz 70mA
* 15,000hrs long life time
* Instant start with full bright output flick free
* Perfect replacement for 75W incandescent Bulb
* Low temperature,safety to touch
* No UV or IR emission, mercury FREE
* This lamp is not suitable for accent lighting








7.5W E27 RGBW 570 Lumen

Item No.	R00141
Potencia nominal/Wattage(W)	7.5
Temperatura de color/CCT(K)	RGB+3000k
Flujo luminoso/Luminous Flux(lm)	570
Tension nominal/Votage(V)	AC 110-240V 50/60Hz
Regulable/Dimmable	YES
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	240°
Material	PBT+cristal/glass
Dimensiones/Dimensions(mm)	Φ60*107

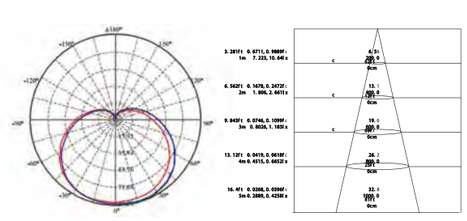

LED E27 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 60mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 100W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz 60mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 100W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






11W ⟷ **100W**
LED ⟷ **Incandescent lamp (Lux.)**



11W E27 870 Lumen
Dimmable

Item No.	R09137
Potencia nominal/Wattage(W)	11
Temperatura de color/CCT(K)	3000K
Flujo luminoso/Luminous Flux(lm)	850
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	YES
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	240°
Material	PBT+cristal/glass
Dimensiones/Dimensions(mm)	Φ60*110

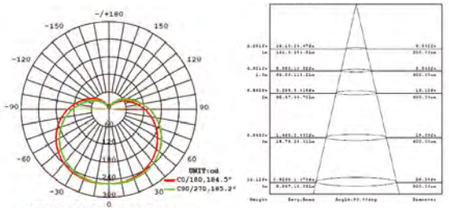

LED E27 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 120mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 125W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz 120mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 125W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






15W ⟷ **125W**
LED ⟷ **Incandescent lamp (Lux.)**



15W E27 1510 Lumen

Item No.	R09139	R09140
Potencia nominal/Wattage(W)	15	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	1460	1510
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	240°	
Material	PBT+cristal/glass	
Dimensiones/Dimensions(mm)	Φ60*120	

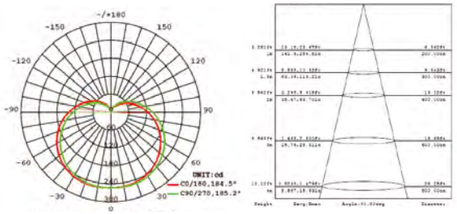

LED E27 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 60mA
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 140W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz 60mA
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 140W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






14W ⟷ **140W**
LED ⟷ **Incandescent lamp (Lux.)**



14W E27 1309 Lumen
G95

Item No.	R09122	R09123
Potencia nominal/Wattage(W)	14	
Temperatura de color/CCT(K)	3000K	5000K
Flujo luminoso/Luminous Flux(lm)	1259	1309
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	180°	
Material	Aluminio+PC/Aluminum+PC	
Dimensiones/Dimensions(mm)	Φ95*131	

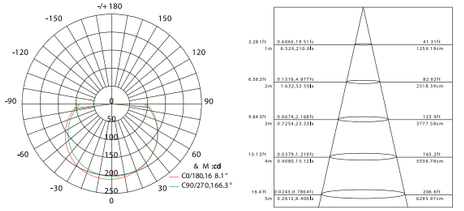

LED E27 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 175W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 220-240V 50/60Hz
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 175W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting






20W ⟷ **175W**
LED ⟷ **Incandescent lamp (Lux.)**



20W E27 1670 Lumen
G120

Item No.	R09212	R09213
Potencia nominal/Wattage(W)	20	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	1615	1670
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	270°	
Material	Aluminio+Cristal/Aluminum+Glass	
Dimensiones/Dimensions(mm)	Φ120*157	

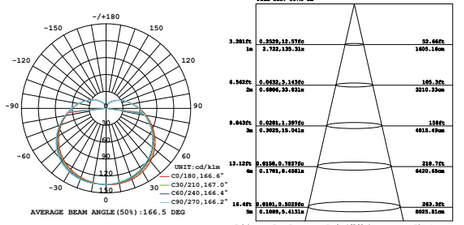

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 56mA
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 140W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 56mA
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 140W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





6.5W E27 720 Lumen
G95

Item No.	R09244	R09245
Potencia nominal/Wattage(W)	6.5	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	720	740
Tension nominal/Votage(V)	AC 220-240V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	E27	
Angulo/Beam Angle(deg)	300°	
Material	Aluminio+Glass Lens/Aluminum+Glass Lens	
Dimensiones/Dimensions(mm)	Φ95*133	

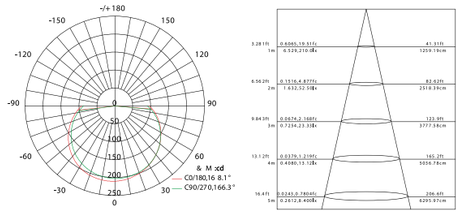

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 45mA
- 25,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 175W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 45mA
- 25,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 175W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





8W E27 720 Lumen
G95

Item No.	R09246
Potencia nominal/Wattage(W)	8
Temperatura de color/CCT(K)	3000K
Flujo luminoso/Luminous Flux(lm)	720
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	YES
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	300°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ95*133

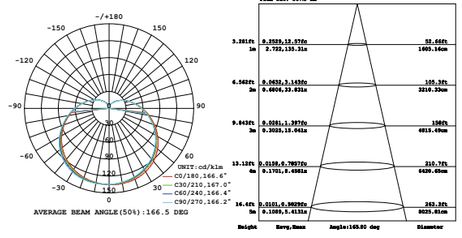

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 56mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 65W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 56mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 65W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





6.5W E27 650 Lumen
G95

Item No.	R09229
Potencia nominal/Wattage(W)	6.5
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	650
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ95*133

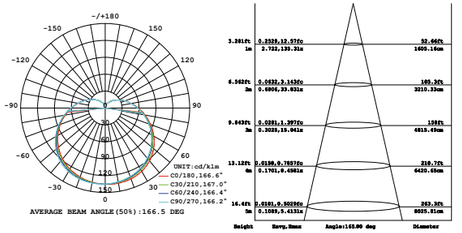

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 56mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 65W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 56mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 65W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





6.5W E27 650 Lumen
G125

Item No.	R09230
Potencia nominal/Wattage(W)	6.5
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	650
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ125*176

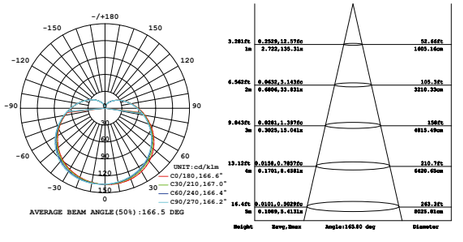

LED E27 ST64 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 45mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 75W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 45mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 75W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





8W E27 700 Lumen
ST64

Item No.	R09206
Potencia nominal/Wattage(W)	8
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	700
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	YES
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ64*142

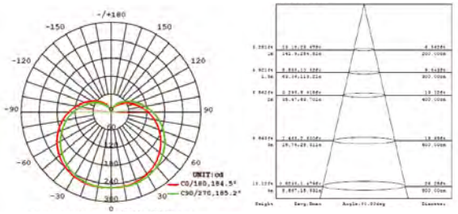

LED E27 G95 Bulb

Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 45mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 75W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 45mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 75W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





8W E27 700 Lumen
G95

Item No.	R09204
Potencia nominal/Wattage(W)	8
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	700
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	YES
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ95*135

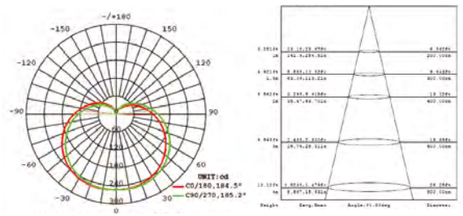

LED E27 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 45mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 65W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 45mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 65W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





6.5W E27 650 Lumen
ST64

Item No.	R09228
Potencia nominal/Wattage(W)	6.5
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	650
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ64*138

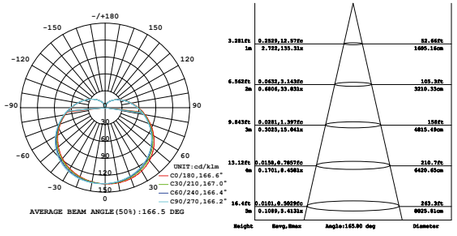

LED E27 G125 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 45mA
- 15,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 75W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 45mA
- 15,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 75W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





8W E27 700 Lumen
G125

Item No.	R09205
Potencia nominal/Wattage(W)	8
Temperatura de color/CCT(K)	2200K
Flujo luminoso/Luminous Flux(lm)	700
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	YES
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ125*170

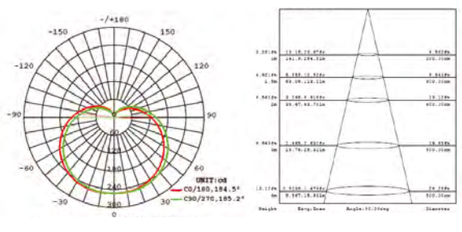

LED E27 T30 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 430mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 60W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 430mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 60W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





6W E27 575 Lumen
T30

Item No.	R09233
Potencia nominal/Wattage(W)	6
Temperatura de color/CCT(K)	2400K
Flujo luminoso/Luminous Flux(lm)	575
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ30*185

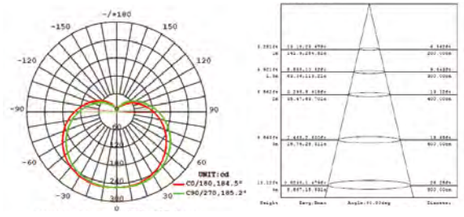

LED E27 T30 Bulb


Caracteristicas

- Voltaje:AC 220-240V 50/60Hz 430mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 70W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion

Features


- Voltage: AC 220-240V 50/60Hz 430mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 70W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting





7W E27 660 Lumen
T30

Item No.	R09232
Potencia nominal/Wattage(W)	7
Temperatura de color/CCT(K)	2400K
Flujo luminoso/Luminous Flux(lm)	660
Tension nominal/Votage(V)	AC 220-240V 50/60Hz
Regulable/Dimmable	NO
CRI	≥80
Casquillo/Lamp Head	E27
Angulo/Beam Angle(deg)	360°
Material	Aluminio+Cristal/Aluminum+Glass
Dimensiones/Dimensions(mm)	Φ30*300

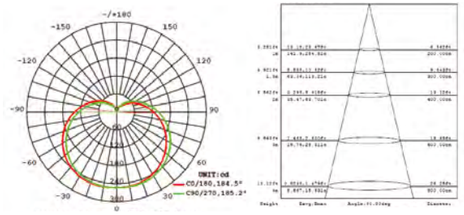


LED GX53 Bulb

Caracteristicas

- Voltaje:AC 100-250V 50/60Hz 80mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 80W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacion


Features

- Voltage: AC 100-250V 50/60Hz 80mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 80W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting

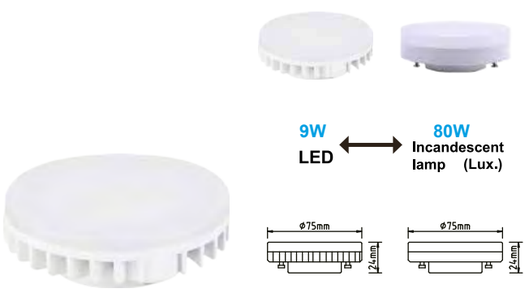

9W GX53 730 Lumen

Item No.	R09224	R09225
Potencia nominal/Wattage(W)	9	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	730	740
Tension nominal/Votage(V)	AC 100-250V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	GX53	
Angulo/Beam Angle(deg)	120°	
Material	estampacion de aluminio&PC / Stamping aluminium&PC	
Dimensiones/Dimensions(mm)	Φ75*24	

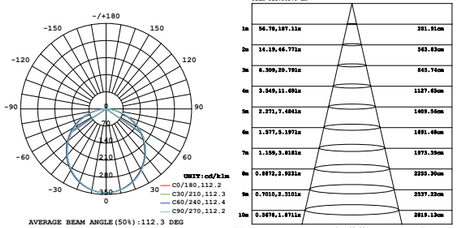


LED GX53 Bulb

Caracteristicas

- Voltaje:AC 100-250V 50/60Hz 104mA
- 20,000 hrs. vida util
- Encendido instantaneo con potencia total
- Perfecta para reemplazar la lampara incandescente de 100W
- Baja temperatura al tacto
- Libre de mercurio, Libre de emision UV & IR
- Esta lampara no es idonea para la iluminacion de acentuacic


Features

- Voltage: AC 100-250V 50/60Hz 104mA
- 20,000hrs long life time
- Instant start with full bright output flick free
- Perfect replacement for 100W incandescent Bulb
- Low temperature,safety to touch
- No UV or IR emission, mercury FREE
- This lamp is not suitable for accent lighting

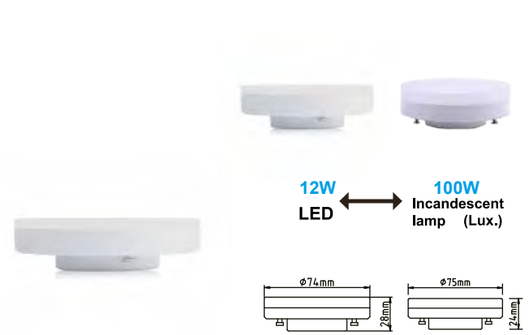

12W GX53 930 Lumen

Item No.	R09248	R09249
Potencia nominal/Wattage(W)	12	
Temperatura de color/CCT(K)	3000K	4000K
Flujo luminoso/Luminous Flux(lm)	930	960
Tension nominal/Votage(V)	AC 100-250V 50/60Hz	
Regulable/Dimmable	NO	
CRI	≥80	
Casquillo/Lamp Head	GX53	
Angulo/Beam Angle(deg)	120°	
Material	estampacion de aluminio&PC / Stamping aluminium&PC	
Dimensiones/Dimensions(mm)	Φ74*28	

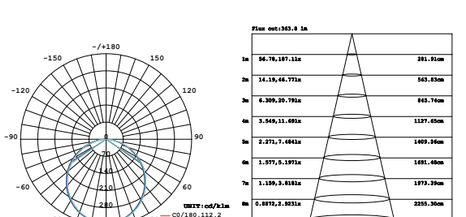

ref	pág
1326	386
1388	388
1391	388
1394	388
1397	426
1398	426
1399	426
1400	398
5121	102
5170	87
5210	102
5233	86
5234	86
5235	87
5236	87
5237	86
5237	88
5237	90
5238	87
5238	88
5238	90
5239	87
5239	91
5240	86
5240	91
5316	88
5317	88
5410	120
5411	120
5480	104
5481	104
5500	125
5501	124
5502	122
5503	124
5508	125
5513	122
5515	127
5516	127
5517	126
5622	190
5623	190
5624	191
5625	191
5626	204
5627	204
5628	204
5629	204
5632	208
5633	208
5714	75
5715	74
6015	202
6016	202
6044	218
6045	218
6046	76
6047	77
6048	76
6049	77
6050	76
6051	77
6070	80
6071	80
6072	80
6075	82
6076	82
6077	82
6080	72
6081	72
6082	72
6083	72
6091	84
6092	84
6093	84
6150	125
6151	125
6152	122
6153	122
6162	118
6166	116
6168	116
6211	420
6212	418
6213	422
6214	422
6215	422
6218	422
6220	54
6221	54
6222	54
6230	98
6253	102
6254	102
6280	197
6281	196
6282	196
6283	70
6283	198
6284	70
6380	106
6381	106
6382	106
6383	106
6384	106
6385	106
6390	275
6391	275
6392	274
6393	274
6394	274
6395	250
6396	250
6397	274
6398	251
6399	251
6400	238
6401	238
6402	239
6403	239
6405	276
6406	276
6480	376
6481	376
6482	316
6483	316
6484	376
6490	402
6491	374
6492	312
6493	312
6494	310
6495	310
6505	322
6506	322
6508	314
6510	326
6511	326
6512	327
6513	327
6514	326
6515	326
6516	327
6517	327
6520	328
6521	328
6522	328
6523	328
6524	328
6525	336
6526	336
6527	328
6530	338
6531	338
6534	340
6535	340
6536	341
6537	341
6538	340
6539	341
6540	342
6541	342
6542	343
6543	343
6545	392
6546	394
6547	396
6550	400
6551	306
6552	306
6553	358
6554	358
6555	424
6558	318
6559	318
6560	114
6561	114
6562	146
6563	147
6620	128
6621	128
6622	128
6623	128
6624	128
6625	128
6626	128
6627	128
6628	130
6629	130
6630	130
6631	130
6632	130
6633	130
6634	130
6635	130
6700	64
6701	64
6702	66
6703	66
6710	197
6711	196
6712	196
6713	70
6713	198
6714	70
6715	139
6716	138
6717	220
6718	220
6735	152
6736	152
6737	136
6738	136
6740	404
6741	404
6742	406
6743	406
6744	404
6745	404
6746	406
6747	406
6750	58
6751	60
6752	58
6753	60
6754	56
6755	56
6760	52
6761	52
6762	52
6763	52
6768	320
6769	320
6770	308
6771	408
6772	408
6773	408
6774	308
6810	277
6811	277
6812	277
6813	277
6820	78
6821	78
6825	188
6826	188
6827	110
6828	110
6830	200
6831	200
6832	200
6833	200
6835	268
6837	268
6838	268
6839	270
6840	270
6841	270
6842	270
6843	270
6844	270
6845	270

6846	270
6850	302
6851	302
6855	230
6856	230
6857	231
6858	231
6859	230
6860	230
6861	231
6862	231
6865	62
6866	62
6900	266
6901	266
6902	266
6903	266
6905	374
6906	374
6907	374
7011	428
7012	428
7013	430
7014	430
7015	428
7016	428
7017	430
7018	430
7021	432
7022	432
7023	432
7024	432
7025	432
7026	432
7027	434
7028	434
7029	434
7030	434
7031	434
7032	434
7037	326
7038	326
7039	327
7040	327
7045	350
7046	350
7050	344
7051	344
7052	344
7055	364
7056	364
7060	362
7061	362
7062	352
7063	352
7065	360
7066	360
7070	348
7071	348
7072	348
7073	348
7080	232
7081	232
7082	232
7083	232
7085	378
7086	346
7088	380
7090	382
7091	382
7092	382
7093	382
7095	370
7096	371
7100	384
7101	384
7105	410
7106	410
7107	412
7108	354
7109	354
7115	372
7116	372
7130	414
7131	416
7133	304
7134	368
7136	391
7138	390
7175	48
7176	48
7177	48
7180	356
7181	356
7182	356
7183	356
7184	366
7185	366
7186	366
7187	366
7197	50
7198	50
7199	50
7200	222
7201	222
7202	222
7203	222
7204	222
7205	222
7206	222
7207	222
7208	224
7209	224
7210	224
7211	224
7212	224
7213	224
7214	224
7215	224
7216	222
7216	224
7217	222
7217	224
7218	222
7218	224
7219	222
7219	224
7220	222
7220	224
7221	222
7221	224
7222	222
7222	224
7223	222
7223	224
7224	222
7224	224
7240	44
7241	46
7290	140
7291	142
7292	36
7293	34
7294	194
7295	194
7296	38
7297	38
7298	40
7299	40
7300	42
7301	42
7305	172
7306	174
7307	176
7308	174
7308	176
7310	182
7311	184
7312	178
7313	181
7315	210
7316	210
7317	212
7318	212
7319	210
7319	212
7320	210
7320	212
7321	210
7321	212
7322	210
7322	212
7360	279
7361	279
7362	279
7363	280
7364	280
7365	280
7366	278
7367	278
7368	278
7369	281
7370	281
7371	286
7372	286
7373	286
7374	286
7375	286
7376	287
7377	287
7378	285
7379	285
7380	285
7381	282
7382	282
7383	282
7384	282
7385	282
7386	282
7387	282
7388	282
7389	282
7390	282
7391	282
7392	283
7393	283
7394	283
7395	283
7396	283
7397	283
7398	283
7399	283
7400	283
7401	283
7402	283
7403	281
7404	281
7405	281
7406	281
7407	284
7408	284
7409	284
7410	284
7411	284
7412	284
7413	284
7414	284
7415	284
7416	284
7420	294
7421	294
7422	294
7423	296
7424	296
7425	296
7426	298
7427	298
7428	298
7429	300
7430	300
7431	300
7435	332
7436	332
7437	332
7438	332
7451	236
7452	236
7453	236
7454	236
7460	98
7462	112
7463	112
7464	144
7465	145
7470	324
7471	324
7472	324
7473	324

7475	168
7476	170
7480	52
7481	52
7482	52
7483	52
7484	52
7510	132
7511	132
7512	150
7513	32
7514	32
7515	134
7516	134
7517	148
7518	68
7519	68
7520	134
7521	134
7522	148
7523	68
7524	68
7535	234
7536	234
7540	156
7541	156
7542	154
7543	154
7544	156
7545	156
7546	154
7547	154
7548	160
7549	160
7550	160
7551	160
7552	160
7553	160
7554	162
7555	162
7556	162
7557	162
7558	162
7559	162
7569	158
7590	26
7591	26
7592	28
7593	28
7594	26
7595	26
7596	28
7597	28
7640	428
7641	430
7642	428
7643	430
7645	330
7646	330
7647	330
7648	330
7649	330
7650	330
7651	334
7652	334
7653	334
7654	334
7693	22
7694	22
7695	24
7720	30
7721	30
7730	192
7731	192
7732	192
7733	192
7734	192
7735	192
7740	260
7741	260
7742	260
7743	260
7760	108
7761	108
7762	108
7763	108
7770	20
7771	20
7772	20
7773	20
7774	16
7775	16
7776	16
7777	16
7778	18
7780	216
7781	216
7782	216
7783	216
7784	164
7785	164
7786	164
7787	164
7788	214
7789	214
7790	166
7791	166
112 XTS	229
113 XTS	229
122 XTS	229
123 XTS	229
142 XTS	228
143 XTS	228
212 XTS	228
213 XTS	228
242 XTS	228
243 XTS	228
342 XTS	228
343 XTS	228
352 XTS	228
353 XTS	228
412 XTS	229
413 XTS	229
C0001	258
C0002	258
C0003	258
C0004	258
C0005	258
C0006	258
C0007	258
C0008	258
C0041	248
C0042	248
C0043	249
C0044	249
C0047	248
C0048	248
C0049	249
C0050	249
C0071	242
C0072	242
C0073	242
C0074	242
C0075	243
C0076	243
C0077	243
C0078	243
C0079	244
C0080	244
C0083	272
C0084	272
C0085	207
C0086	207
C0087	206
C0088	206
C0089	100
C0101	92
C0102	92
C0103	96
C0104	96
C0111	92
C0112	92
C0113	96
C0114	96
C0117	94
C0118	94
C0119	92
C0120	92
C0124	94
C0125	95
C0126	95
C0127	92
C0128	92
C0129	94
C0130	95
C0131	92
C0132	92
C0133	94
C0134	95
C0141	101
C0142	101
C0143	101
C0160	262
C0161	262
C0162	264
C0163	264
C0164	262
C0165	265
C0180	252
C0181	252
C0182	253
C0183	253
C0184	252
C0185	252
C0186	253
C0187	253
C0190	256
C0191	256
C0192	257
C0193	257
C0194	256
C0195	256
C0196	257
C0197	257
SKB 122	228
SKB 123	228
SPW11SK 215	228
SPW11SK 315	228
TU0492	386
TU0492	388
TU0492	393
TU0492	398
TU0492	404
TU0492	406
TU0494	386
TU0494	388
TU0494	398
TU0652	386
TU0652	388
TU0652	393
TU0652	398
TU0652	404
TU0652	406
TU0653	388
TU0653	393
TU0653	404
TU0653	406
XTSF 102	228
XTSF 103	228
XTSF 302	228
XTSF 303	228
XTSF 42003	229
XTSF41002	229
XTSF41003	229

Créditos

Dirección de arte
Vicente Moya
José Ignacio Ballester

Fotografías 3D
Javier Gilabert Photographer
Vicente Moreno
Cualiti Photo Studio
Sergi Penalba
Estudios Aviñó

Diseño gráfico y Comunicación
Amparo Navarro Villar
creativo@mantraco.org

Impresores
Impressa Artes gráficas
www.impressa.es

MANTRA
Pol. Ind. Los Vientos
Calle Alisio, parcela nº4
46119 Náquera · Valencia · Spain
Tel. +34 96 160 99 50
mantra@mantraco.org

Depto. Nacional
Tel. +34 96 160 99 50
mar@mantraco.org

Depto. Internacional
Tel. +34 96 160 99 50
c.ando@mantraco.org

DECORATIVO

© copyriht - Global Manufacturing and trading company S.L

GERMAN DESIGN AWARD NOMINEE 2021

Himalaya
Santiago Sevillano Studio

watch MANTRA videos